

Initial Environmental Examination

Document Stage: Draft (Updated 01)

Project Number: 49107-005

June 2021

**IND: Tamil Nadu Urban Flagship Investment Program
(Tranche 2) – Dedicated Water Supply Scheme for
Madurai Municipal Corporation from Mullai Periyar
River at Lower Camp**

Prepared by Madurai Municipal Corporation for the Asian Development Bank.

CURRENCY EQUIVALENTS

(as of 4 July 2019)

Currency Unit	–	Indian rupee (₹)
₹1.00	=	\$0.0145
\$1.00	=	₹68.7685

ABBREVIATIONS

ADB	-	Asian Development Bank
CPHEEO	-	Central Public Health and Environment Engineering Organization
CMSC	-	Construction Management And Supervision Consultant
CPCB	-	Central Pollution Control Board
CTE	-	Consent To Establishment
CTO	-	Consent To Operation
CWSS	-	Combined Water Supply Scheme
EAC	-	Expert Appraisal Committee
EHS	-	Environmental Health And Safety
EIA	-	Environmental Impact Assessment
EMP	-	Environmental Management Plan
ESS	-	Environmental and Social Safeguards
GOTN	-	Government of Tamil Nadu
IEE	-	Initial Environmental Examination
MOEFCC	-	Ministry of Environment, Forest and Climate Change
NOC	-	No Objection Certificate
OHT	-	Over Head Tank
PIU	-	Program Implementation Unit
PMU	-	Program Management Unit
PPTA	-	Project Preparatory Technical Assistance
REA	-	Rapid Environmental Assessment Checklist
ROW	-	Right-Of-Way
SEIAA	-	State Environmental Impact Assessment Authority
SPS	-	Safeguard Policy Statement, 2009
TNPCB	-	Tamil Nadu Pollution Control Board
TNUFIP	-	Tamil Nadu Urban Flagship Investment Program
TNUIFSL	-	Tamil Nadu Urban Infrastructure Financial Services Limited
UGT	-	Underground Tank
WHO	-	World Health Organization
WTP	-	Water Treatment Plant
WDS	-	Water Distribution Station

WEIGHTS AND MEASURES

°C	-	Degree Celsius
Km	-	Kilometer
lpcd	-	Litres Per Capita Per Day
m	-	Meter
MCFT	-	Million Cubic Feet
Mgd	-	Million Gallons Per Day
MLD	-	Million Litres Per Day
mm	-	Millimeter
nos	-	Numbers
km ²	-	Square Kilometer

NOTE

In this report, "\$" refers to United States dollars.

This draft Initial Environmental Examination is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature. Your attention is directed to the "terms of use" section on ADB's website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

CONTENTS

		Page
CONTENTS		V
I.	INTRODUCTION	1
	A. Background	1
	B. Scope of Project	2
	C. Purpose of this Initial Environmental Examination (IEE) Report	3
	D. Structure of the Report	3
II.	DESCRIPTION OF THE PROJECT	4
	A. Project Area	4
	B. Existing Water Supply System	4
	C. Proposed Project	16
	D. Implementation Schedule	7
III.	POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK	11
	A. ADB Policy	11
	B. National Environmental Laws	11
IV.	DESCRIPTION OF THE ENVIRONMENT	20
	A. Methodology used for Baseline Study	20
	B. Physical Environmental Component	21
	C. Biological Environment	43
	D. Socio-economic Environment	48
V.	ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES	62
	A. Pre-Construction Impacts- Design and Location	63
	B. Construction Impacts	63
	C. Operation and Maintenance Impacts	74
	D. Cumulative Impact Assessment	75
VI.	PUBLIC CONSULTATION AND INFORMATION DISCLOSURE	78
	A. Overview	78
	B. Public Consultation	78
	C. Information Disclosure	79
VII.	GRIEVANCE REDRESS MECHANISM	80
VIII.	ENVIRONMENTAL MANAGEMENT PLAN	84
	A. Implementation Arrangements	112
	B. Training Needs	115
	C. Monitoring and Reporting	116
	D. EMP Implementation Cost	117
IX.	CONCLUSION AND RECOMMENDATIONS	119

APPENDIXES:

1. Rapid Environmental Assessment Checklist
2. Salient Features of Major Labor Laws Applicable to Establishments Engaged in Construction of Civil Works
3. Sample Grievance Registration Form
4. Sample Outline Spoils (construction waste) Management Plan
5. Sample Outline Traffic Management Plan
6. Sample Environmental Site Inspection Report
7. Quarterly Reporting Format for Madurai Municipal Corporation / program implementation unit
8. Public Information Notice Template
9. Stakeholder consultation / focussed group discussion for dedicated water supply scheme for Madurai Municipal Corporation from Mullai Periyar at lower camp
10. Public Works Department Permission for withdrawal of water
11. Present activity status
12. Status note on safety aspects related to associated facility
13. Map showing the distance from forest area and proposed project
14. Existing water supply system
15. Overhead Tanks Details
16. Public Consultation at Overhead Tanks locations
17. Detailed Operational Report on Safety Measures & Pre-Cautions Followed In Site for Covid-19 (SOP)
18. Tree Transplantation Details

EXECUTIVE SUMMARY

The program will develop priority water supply, sewerage, and drainage infrastructure in at least 10 cities in strategic industrial corridors in Tamil Nadu. The Municipal Administration and Water Supply Department (MAWS), acting through Tamil Nadu Urban Infrastructure Financial Services Limited (TNUIFSL), is the executing agency. Urban local bodies are the implementing agencies for the subprojects.

Components. The Tamil Nadu Urban Flagship Investment Program (TNUFIP) is structured under three main components: (i) investment in municipal infrastructure namely water supply and sewerage, (ii) municipal reform-based activities, and (iii) technical assistance for design, supervision, program management, reforms, and climate change.

The Subproject. Dedicated water supply scheme for Madurai Municipal Corporation (MMC) from the Mullai Periyar River at Lower Camp, as source of water is proposed to fulfill the water supply demand for the intermediate stage 2034 (for a population of 1,923,936) by tapping 1,630 million cubic feet (MCFT) (130 million liters per day [MLD]). Already MMC is tapping 1,500 MCFT (115 MLD) from Vaigai dam, 21 MLD from River Cauvery source under Melur combined water supply scheme and 47 MLD from Vaigai river bed. The total water supply demand gap for MMC (100 wards) in 2034 is estimated to be 141.39 MLD. There is no nearby reliable source of water to fulfill the total water supply demand gap of 141.39 MLD. Hence, this subproject is proposed to be implemented under the TNUFIP (Tranche 2) to meet the water demand. The subproject includes the construction of check dam, intake arrangements and laying of 1,118 mm and 1,067 mm mild steel raw water pumping main to the proposed water treatment plant at Pannaipatty and feeder main and distribution system.

The raw water (130 MLD) will be collected from the proposed check dam across Mullai Periyar River at Lower Camp in the immediate downstream of 18th canal scheme by providing necessary intake arrangements. The water from the intake well is conveyed through proposed 1,118 mm and 1,067 mm mild steel raw water pumping main to the proposed water treatment plant (WTP) at Pannaipatti. The 130 MLD raw water treatment plant is proposed at Pannaipatti within the site where the existing water treatment plant is located. After treatment, 125 MLD of clear water will be conveyed through clear water gravity transmission main and onwards to the proposed Overhead tanks (OHTs) through a network of feeder mains and distribution main for a length of 855 Km in 28 Wards.

Project implementation arrangements. The MAWS of Government of Tamil Nadu acting through TNUIFSL is the state-level executing agency. A Program Management Unit (PMU) has been established in TNUIFSL headed by a Project Director and Deputy Project Director (senior official from Commissionerate of Municipal Administration [CMA]), and a dedicated full-time staff from TNUIFSL for overall project and financial management. The MMC is the implementing agency for this subproject. A program implementation unit (PIU) is established in MMC for day-to-day implementation of the subproject. The PIU is assisted by construction management and supervision consultant (CMSC). Environmental And Social Safeguards (ESS) Managers in PMU/TNUIFSL have overall responsibility of safeguard compliance with respect to Environmental Management Plan (EMP) and Environmental Assessment Review Framework (EARF). Environmental Specialist of the CMSC is assisting PIU in implementation of subproject in compliance with EMP and EARF and carries out all necessary tasks.

Screening and assessment of potential impacts. ADB requires the consideration of environmental issues in all aspects of the bank's operations, and the requirements for

environmental assessment are described in ADB's Safeguard Policy Statement (SPS), 2009. As per the Government of India environmental impact assessment (EIA) Notification, 2006, this subproject do not require EIA study or environmental clearance. The potential environmental impacts of the subproject have been assessed using ADB Rapid Environmental Assessment (REA) checklist (Appendix 1) for water supply. The potential negative impacts were identified in relation to pre-construction, construction and operation phases.

Categorization. Based on results of the assessment the subprojects is classified as Environmental category "B", Subproject potential adverse environmental impacts are less adverse than those of category A, and are site-specific, and in most cases mitigation measures can be designed more readily than for category A projects. As per the ADB SPS, 2009, preparation of Initial Environmental Examination (IEE) is mandatory for category "B" projects and accordingly this IEE has been prepared.

Description of the Environment. Madurai City is located in the south-central Tamil Nadu (470 km from Chennai) and it is the third largest city in Tamil Nadu. Geographically Madurai City is located at 9°55' North and 78°07' East Longitude and 330 feet above sea level on the banks of River Vaigai. The city has an area of 51.80 km². Madurai City experiences soaring heat in the month of May ranging about 38.2°C and a minimum temperature of about 21.0°C in the month of December. The city receives the highest rainfall in the month of October and the lowest in January. The northeast monsoon brings a fair amount of rainfall with a maximum of 254.4 mm in October. The major portion of the city soil is red and black. The adjoining area of the city has vandal soil. The city is completely free of forest areas; there is no eco-sensitive areas located within or near the city. On the outskirts of the city, agriculture is followed predominantly. The crops cultivated includes fruits crops like mango, banana and aonla, vegetables like bhendi, gourds, tomato, brinjal, onion and chillies, plantation crops like cashew and betel vine, and flower crops like jasmine and tuberose. As per Census 2011, the population in Madurai City are 1,846,801; of which male and female are 925,228 and 921,573 respectively. Total literates in Madurai City are 1,485,340 of which 777,351 are males while 707,989 are females. Average literacy rate of Madurai City is 90.91%. The sex ratio of Madurai City is 999 per 1,000 males. The city is well connected by the National Highways NH 7, NH 45B, NH 208 and NH 49. Madurai Junction is the major railway station serving the city, there are direct trains connecting major cities and towns across India. Madurai Airport located at Avaniyapuram offers domestic flight services to key cities in India and international services to Middle East and south Asian countries.

Potential environmental impacts and mitigation measures. The subproject is unlikely to cause significant impacts that are irreversible, diverse or unprecedented because: (i) the components will involve straightforward construction and operation, so impacts will be mainly localized; (ii) there are no significant sensitive environmental features in the project sites although careful attention needs to be paid to minimizing disruption to local population; and (iii) **predicted impacts are site-specific and likely to be associated with the construction process involving excavation and earth movements and controlled blasting for removal of hard rock in some stretches along the alignment and project sites.**

Potential impacts that might arise during construction shall be considered as significant but temporary. These impacts of construction are common in urban areas, and there are well-developed methods to mitigate the same. Except laying of conveying main and distribution main, all other construction activities like headwork's, clear water main and water treatment plant will be confined to the selected sites, and the interference with the general public and community around is minimal. In these works, the temporary negative impacts arise mainly from construction dust and noise, hauling of construction material, waste and equipment on local roads (traffic, dust,

safety, etc.), occupational health and safety aspects and **controlled blasting will be done if required**. Laying of pipeline will be conducted along the edge of road. Therefore, water pipe laying works will have impacts on the movement of the traffic; safety risk to workers and impediment to public restricting their access, disposal of construction waste, etc. These are all general impacts of construction and there are well-developed methods of mitigation that are suggested in the EMP and supervised by EHS Supervisor.

Source Sustainability. Presently, there are 58 combined and dedicated water supply schemes existing in Mullaperiyar River and Vaigai River between Mullaperiyar dam (source) and Vaigai dam (downstream). Total required quantity for 58 existing schemes is 84.80 MLD (35.63 cusecs). Drinking water supply demand of Madurai Municipal Corporation is 125 MLD (51.09 cusecs). Therefore, total of 209.80 MLD (86.72 cusecs) is required by total 59 drinking water supply schemes between Mullaperiyar dam and Vaigai dam.

From Public Work Department (PWD) data, it is observed that average of minimum monthly storage from January 2012 to December 2018 is approximately 1,001 MCFT. Details of water release schedule on year-round basis as per Tamil Nadu PWD (Ref.: Lr. No. DB/ JD01/ 384/ C.10 (P)/2018, dt. 26 December 2018) is shown in Table below. Required quantity for MMC is scheduled as continuous release for drinking water supply requirements.

Water Release Schedule from Mullaperiyar Dam

No.	Description	Demand Type	Duration	Water Release
	EXISTING			<u>cusecs</u>
1	Cumbum Valley Irrigation Scheme	irrigation	240 days on or after 1 June	200.00
2	PT Rajan Channel	irrigation	100 days after 1 Oct	100.00
3	Theni District (58 Schemes - Table 1)	drinking water	Year Round	100.00
	PROPOSED			
4	Madurai Municipal Corporation Scheme	drinking water	Year Round	51.09

Source: Public Work Department, Government of Tamil Nadu.

Therefore, year round demand for drinking water supply of 151.09 cusecs per day works out to monthly requirement of approximately 391.65 MCFT per month. Since average value of minimum monthly storage of Mullaperiyar dam from January 2012 to December 2018 is 1,001 MCFT per month and also drinking water supply is given highest priority in National Water Policy and State Government, it is concluded that Mullaperiyar dam source is sustainable for proposed Madurai water supply Improvement Scheme of Madurai Municipal Corporation.

Environmental Management Plan. An EMP has been developed to provide mitigation measures to reduce all negative impacts to acceptable levels, along with the delegation of responsibility to appropriate agency. As stated above, various design related measures are already included in the project design. During construction, the EMP includes mitigation measures such as (i) proper planning of pipe laying works to minimize the public inconvenience; (ii) barricading, dust suppression and control measures; (iii) traffic management measures for works along the roads and for hauling activities; (iv) provision of walkways and planks over trenches to ensure access will not be impeded; and (v) finding beneficial use of excavated materials to extent possible to reduce the disposal quantity. **Hard rock removal through controlled blasting for excavation is anticipated along sections of project alignment and in some of the project sites. If hard rocks identified during implementation in locations / stretches all the mitigation measures will be followed. Mitigation measures to ensure safety during the implementation have been included in the EMP.** The EMP will guide the environmentally sound construction of the subproject. The EMP

includes a monitoring program to measure the effectiveness of EMP implementation and include observations on- and off-site, document checks, and interviews with workers and beneficiaries.

The EMP will be included in the bid and contract documents to ensure compliance to the conditions set out in this document. The contractor will be required to submit to PIU, for review and approval, a site environmental management plan (SEMP) [also reflecting the associated mitigation and monitoring measures for the controlled blasting activities if required](#), including (i) proposed sites/ locations for construction work camps, storage areas, hauling roads, lay down areas, disposal areas for solid and hazardous wastes; (ii) specific mitigation measures following the approved EMP; and (iii) monitoring program as per EMP. No works are allowed to commence prior to approval of SEMP. A copy of the EMP/approved SEMP will be kept on site during the construction period at all times.

Consultation, Disclosure and Grievance Redress Mechanism. The stakeholders were involved in updating the IEE through discussions on-site and a public consultation workshop at project area level, after which views expressed were incorporated into the IEE and in the planning and development of the project. The IEE is made available at public locations and has been disclosed to a wider audience via the ADB, Madurai Municipal Corporation and TNUIFSL websites. The consultation process will be continued also during project implementation as required. A grievance redress mechanism (GRM) as described within the IEE is established to ensure any public grievances are addressed quickly.

Monitoring and Reporting. Contractor will submit a monthly EMP implementation report to PIU. PIU with the assistance of CMSC will monitor the compliance of contractor, prepare a Quarterly Environmental Monitoring Report and submit to PMU. The PMU will oversee the implementation and compliance and will submit semi-annual monitoring reports to ADB. ADB will post the environmental monitoring reports on its website. Monitoring reports will also be posted on MMC and TNUIFSL websites.

Conclusions and Recommendations. Therefore, as per ADB SPS, 2009 the project is classified as environmental category 'B' and does not require further environmental impact assessment. Water Treatment Plant requires Consent To Establishment (CTE) and Consent To Operate (CTO) from Tamil Nadu Pollution Control Board. [The application for consent to establish has been submitted to TNPCB and is under scrutiny and permission is awaited.](#) This IEE shall be updated by PIU in Madurai Municipal Corporation during the implementation phase to reflect any changes, amendments and will be reviewed and approved by PMU.

I. INTRODUCTION

A. Background

1. The program will develop priority water supply, sewerage, and drainage infrastructure in at least 10 cities in strategic industrial corridors in Tamil Nadu. The Municipal Administration and Water Supply Department (MAWS), acting through Tamil Nadu Urban Infrastructure Financial Services Limited (TNUIFSL), is the executing agency. Urban local bodies are the implementing agencies for the subprojects.

2. **Components.** The TNUFIP is envisaged to be structured under three main components: (i) investment in Municipal infrastructure namely water supply and sewerage; (ii) municipal reform-based activities; and (iii) technical assistance for design, supervision, program management, reforms, and climate change.

3. **Impact and outcome.** Project 2 is aligned with the following impacts of the investment program: (i) universal access to basic water and sanitation services achieved; (ii) “world-class” cities and industrial corridors across the state developed; and (iii) water security, reduced vulnerability to climate change in urban areas, achieved. The investment program will have the following outcome: livability and climate resilience in five cities (Ambur, Tiruppur, Vellore, Madurai, and Tiruchirappalli) in priority industrial corridors enhanced.

(i) **Output 1: Climate-resilient sewage collection and treatment, and drainage systems developed in four cities.** Works in Tiruchirappalli, Ambur, Tiruppur, and Vellore include: (i) 2 new Sewage Treatment Plants (STPs) with a combined treatment capacity of 72.71 million liters per day (MLD) constructed; (ii) 1 STP (15 MLD capacity) rehabilitated; (iii) 3,000 cubic meters (m³) treated wastewater reused per day; (iv) 1,256 kilometers (km) of new sewage collection pipelines constructed, with 100% households connected (152,580 households); (v) 28 pumps and 44 lift stations (combined capacity of 3,690 kilowatts [kW]) constructed; and (vi) 8 (2 in each city) all-female community water and sanitation committees formed. The breakdown by city is: (i) in Tiruchirappalli new sewage collection system constructed; (ii) in Ambur new sewage collection system and 16.71 MLD STP constructed with 3,000 m³ treated wastewater reused; (iii) in Tiruppur new sewage collection system with new 56 MLD STP constructed and one 15 MLD STP rehabilitated; and (iv) in Vellore new sewage collection system constructed.

(ii) **Output 2: Water supply systems in two cities improved with smart features.** Works in Tiruppur and Madurai include: (i) 1,260 km of new distribution pipelines commissioned with 100% households connected (188,900 households) in 66 newly established district metering areas (DMAs) with new supervisory control and data acquisition systems to manage and reduce nonrevenue water (NRW); (ii) 66 new storage reservoirs with combined capacity of 92 million liters constructed; (iii) 3 pump stations (combined capacity of 7,225 kW) constructed; (iv) 196 km new transmission mains and 230 km of feeder mains constructed; (v) 3 new intakes and 3 new water treatment plants of combined capacity of 321 MLD constructed; and (vi) 80% of technical staff from each implementing agency of 2 cities trained in NRW reduction including 100% women staff. The breakdown by city is: (i) in Tiruppur, 1,060 km of distribution pipelines in 29 DMAs, 29 storage reservoirs, 2 pump stations (5,975 kW), 46 km of transmission mains and 121 km of feeder mains, and a new intake with 196 MLD water treatment plant; and (ii) in Madurai, 200 km of distribution pipelines in 37 DMAs, 37 storage reservoirs, 1 pump station

(1,250 kW), 150 km transmission mains and 109 km feeder mains, and a new intake structure with 125 MLD water treatment plant.

- (iii) **Output 3: Institutional capacity, public awareness, and urban governance strengthened.** This includes a performance-based urban governance improvement program implemented for 10 project cities to (i) achieve targeted household connections for water and sewerage projects; (ii) timely completion of projects under the MFF as per the original implementation schedule; (iii) actions in fecal sludge management in areas not covered by centralized sewerage system; (iv) reuse of treated wastewater; and (v) implementation of gender action plan. Governance improvement and awareness consultants recruited under Project 1 will support output 3.

B. Scope of Project

4. The Madurai Municipal Corporation (MMC) drinking water need is being managed with the allotted quantity of 1,500 Million Cubic Feet (MCFT) (115 MLD) at Vaigai dam, 21 MLD from River Cauvery source under Melur Combined Water Supply Scheme (CWSS) and 47 MLD from Vaigai river bed. The intermediate water supply demand for 2034 with the population of 1,923,936 is estimated to be 324.39 MLD including 15% transmission losses. From all existing sources, the designed quantity of water available is only 183 MLD. The water supply demand gap for 2034 is 141.39 MLD. To meet out the demand gap of 125 MLD the MMC has analysed the possibilities of drawl of water from Mullai Periyar River at Lower camp through closed conduits. Further a deficit of 16.39 MLD shall be augmented by the year 2034. The Water Supply Demand Gap Statement for the Proposed and Existing Water Supply Distribution Zones

- (i) In G.O. No. 872, Public Works Department (PWD) dated 4 June 1985 Government has allotted 1,500 MCFT from Vaigai dam, through this 115 MLD quantity of water is being drawn every day. There is a huge gap between available quantity and demand.
- (ii) Vaigai dam receives water mainly from Mullai Periyar River. During summer 200 cusecs of water is being released for water supply demand of Theni and Madurai Districts. The head works in the upstream side of Vaigai dam are tapping 100 cusecs of water for the local bodies in the Theni District but due to evaporation and percolation of loss the remaining 100 cusecs is not reaching Vaigai dam, only 40 cusecs are reaching Vaigai dam. Hence, to avoid evaporation percolation losses, it is proposed to draw 130 MLD of water from Mullai Periyar River at Lower Camp through closed conduits.
- (iii) The water will be collected by accumulating it through the construction of a check dam across Mullai Periyar River at Lower Camp in the immediate downstream of 18th canal scheme by providing necessary intake arrangements. The water from the intake well is conveyed through newly proposed 1,422 mm mild steel raw water pumping main to the newly proposed Water Treatment Plant (WTP) at Pannaipatti.
- (iv) 125 MLD raw water treatment plant is proposed at Pannaipatti in the same place where the existing WTP is located.
- (v) After treatment, 125 MLD of clear water is conveyed through clear water gravity transmission main to MMC.
- (vi) Then the water is conveyed through proposed feeder mains to the newly proposed service reservoirs for proper distribution to the beneficial use.
- (vii) Distribution system is divided into 81 water supply distribution zones with 220 District Metering Areas (DMA). There are 37 new service reservoirs have been proposed and 44 existing service resrviors have been considered to be retained in the proposed system.

5. The Government has allotted 8.97 MLD of water from Melur CWSS for MMC. The allotted quantity is tapped at LS 1,560 m of feeder main to Melur Municipality in Alagar koil–Melur Road and conveyed to MMC for beneficial use.

C. Purpose of this Initial Environmental Examination (IEE) Report

6. ADB requires the consideration of environmental issues in all aspects of the Bank's operations, and the requirements for environmental assessment are described in ADB's Safeguard Policy Statement (SPS), 2009. The potential environmental impacts of the subproject have been assessed using ADB Rapid Environmental Assessment (REA) Checklist for water supply (Appendix 1). The potential negative impacts were then identified in relation to pre-construction, construction and operation of the improved infrastructure, and results of the assessment show that the subproject is unlikely to cause significant impacts. Thus, this Initial Environmental Examination (IEE) has been prepared in accordance with ADB SPS's requirements for Environment Category 'B' projects.

7. The IEE is prepared based on the Detailed Project Report (DPR),¹ field reconnaissance surveys and secondary sources of information. No field monitoring (environmental) survey was conducted, however, the environmental monitoring program developed as part of the environmental management plan (EMP) require the contractors to establish the baseline environmental conditions prior to commencement of civil works. *The update is to reflect the inclusion of controlled blasting as one of the construction methodologies identified for hard rock removal if required in the alignment.* The results will be reported as part of the environmental monitoring report and will be the basis to ensure no degradation will happen during subproject implementation. Stakeholder consultation was an integral part of the IEE.

D. Structure of the Report

8. This Report contains the following sections including the executive summary at the beginning of the report:

- (i) Introduction;
- (ii) Description of the project;
- (iii) Policy, legal and administrative framework;
- (iv) Description of the environment;
- (v) Anticipated environmental impacts and mitigation measures;
- (vi) Public consultation and information disclosure;
- (vii) Grievance redress mechanism;
- (viii) Environmental management plan; and
- (ix) Conclusion and recommendation.


¹ Prepared by Madurai Municipal Corporation.

II. DESCRIPTION OF THE PROJECT

A. Project Area

9. Madurai City, located in south central Tamil Nadu, is the third largest city after Coimbatore. The total population is around 18.47 lakh (as per 2011 census) and is the headquarters of Madurai District. The city is well connected by road and railway network to the urban centers in the state and the neighboring states. The MMC administers the city with the administrative jurisdiction extending over an area of 147.99 square kilometers (km²).

Figure 1: Madurai City Map

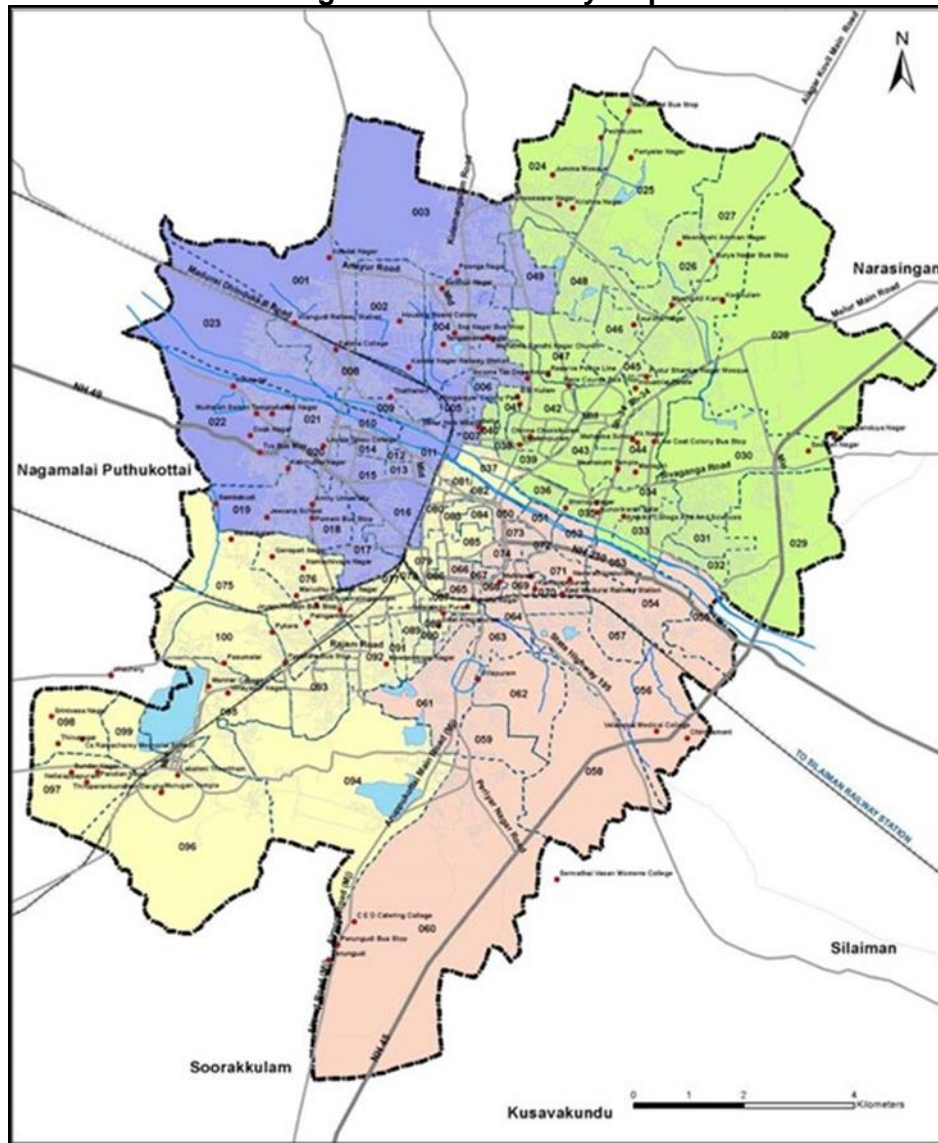


B. Existing Water Supply System

10. **General.** The core city of MMC consists of 100 wards (including the added area of 28 wards). The existing water supply schemes are functioning separately for core area and added

area of MMC. The details of existing water supply schemes (distribution system covering 52 km² areas) are discussed in the following sections.

Figure 2: Water Supply Zones of Core Madurai

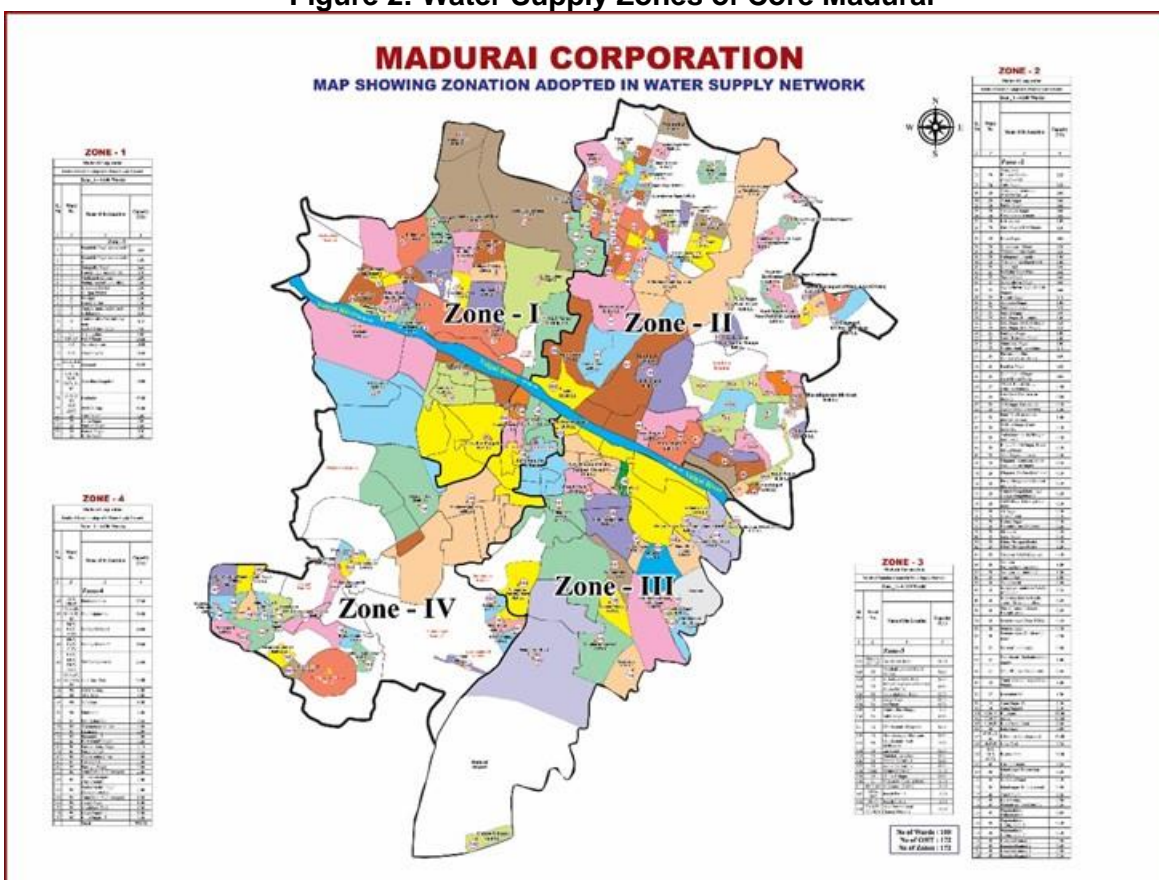

11. **Main Source of Water.** The main source of water supply for Core City of Madurai City Municipal Corporation is Vaigai Dam. The total storage capacity of Vaigai dam is 6,091 MCFT. Vaigai dam reservoir is primarily intended to meet the irrigation requirements of southern districts in Tamil Nadu, apart from providing water supply to Madurai, other wayside towns such as Usilampatti, Nilakottai, Sholavandhan, Vathalagundu and many villages are also benefited through the water supply schemes from River Vaigai. The main source of water to Vaigai dam is the release of surplus water from Mullai Periyar dam. The details of the Vaigai dam and the Mullai Periyar dam are given in the following tables.

Table 1: Vaigai Dam Water Levels

Sl. No.	Vaigai Dam		
	Year	Maximum Level	Minimum Level
1	1993	69.75	69.24
2	1994	69.50	48.65
3	1995	58.15	35.95
4	1996	57.30	27.70
5	1997	70.40	22.15

Sl. No.	Vaigai Dam		
	Year	Maximum Level	Minimum Level
6	1998	69.95	49.20
7	1999	70.20	57.20
8	2000	63.10	44.70
9	2001	63.55	52.35
10	2002	52.25	24.00
11	2003	54.10	22.60
12	2004	60.95	24.23
13	2005	66.84	25.34
14	2006	67.90	44.88
15	2007	64.11	28.35
16	2008	70.93	56.09
17	2009	62.09	26.01
18	2010	69.21	26.25
19	2011	67.76	46.09
20	2012	66.08	33.67
21	2013	57.05	34.66
22	2014	70.33	21.06

Source: Madurai Municipal Corporation.

Table 2: Details of Periyar Dam

Periyar Dam	
Coordinates	9°31'43"N 77°8'39"E
Opening date	1895
Dam and spillways	
Type of dam	Gravity
Impounds	Periyar River
Height (foundation)	53.66 m (176 ft)
Length	365.85 m (1,200 ft) (main)
Width (crest)	3.6 m (12 ft)
Width (base)	42.2 m (138 ft)
Spillways	13
Spillway capacity	3,454.62 m ³ per second
Reservoir	
Total capacity	443,230,000 m ³ (359,332 acre ft)
Active capacity	299,130,000 m ³ (242,509 acre ft)
Max. water depth	43.281 m (142 ft)

ft = feet, m³ = cubic meter.

Source: Madurai Municipal Corporation.

12. **Allocation of water from Mullai Periyar at Lower Camp.** Nearly 100 cusecs of water can be drawn from the check dam located in the downstream of Mullai Periyar River. By considering the water demand of 35 cusec (including the evaporation loss of 7 cusecs [20 %]) for

the Theni local bodies, the remaining available water would be around 58 cusecs, However, for the proposed water supply scheme, it requires only 50 cusecs which shall be drawn from the available water. Month wise details on average storage, average discharge, quantity given for drinking water, irrigation purpose is tabulated and given below.

Table 3: Periyar Dam-Storage, Discharge for Drinking Water & Irrigation

Sl.No.	Name of the Year	Average Storage (in MCFT)	Average Discharge per day (in cusec)	Discharge for Drinking Water Purpose per day (in cusec)	Discharge for Irrigation Purpose per day (in cusec)	Total Release of water for Irrigation Purpose per year (in MCFT)
1	2	3	4	5	6	7
1	2013	2,339.96	672.05	103.59	568.46	17,926.96
2	2014	2,938.37	697.81	102.61	595.20	18,770.14
3	2015	2,839.86	663.56	105.11	558.45	17,611.43
4	2016	1,867.10	407.05	104.29	302.75	9,547.63
5	2017	1,791.78	440.96	100.07	341.01	10,752.27
6	2018 (as on 31 July 2018)	2,260.39	559.72	98.85	460.87	8,441.71

cusec = cubic feet per second, MCFT = million cubic feet.

Notes:

- In Column 3 the average storage of water at Periyar Dam is calculated. The month wise average storage of the Dam is enclosed for reference.
- In Column 4 average discharge from Mullai Periyar Dam is calculated. The month wise average discharge of the Dam is enclosed for reference.
- In Column 5 average drawal of water for drinking water purpose from the total average discharge is calculated (assuming that an average of 100 cusec is being drawn for drinking water purpose). The month wise average drawl from the total average discharge is enclosed.
- In Column 6 average drawal of water for irrigation purpose from the total average discharge is calculated. The month wise average drawal from the total average discharge is enclosed.
- In Column 7 total quantity of water released for irrigation purpose in a year in million cubic feet (MCFT).

13. Storage of water in dam before and after judgment of Supreme Court. The water storage level in the Mullai periyar dam before the court judgment is 136 ft. After the court judgment to regarding increasing the storage level it has been increased from 136 ft to 142 ft (Hon'ble Supreme Court Judgment in original suit no. 3 of 2006 in page no. 97 – para. no. 122.9), due to increase in the storage level 1,598 MCFT can be stored in the dam. The circulation and evaporation loss is calculated as 20% of the released quantity.

14. Stability of the Mullai Periyar Dam. Hon'ble Supreme Court Judgment in original suit no. 3 of 2006 in page no. 99 – para. no. 126 clear order has been given by the experts "The obstruction by Kerala to the water level in the Mullai Periyar dam being raised to 142 ft. on the ground of safety was found untenable, and in its judgment, this court so pronounced". The Supreme Court has passed the judgment after getting the details technical report from the expert committee appointed by Supreme Court. The committee appointed by Supreme Court is examining the stability of the dam continuously interpreting or inferring the Supreme Court order is not possible. A separate note based on Supreme Court. Order on dam safety and related aspects have been attached as Appendix 11.

15. **The Source Sustainability.** Proposal is to augment and improve water supply system in Madurai City Municipal Corporation with Mullaperiyar Dam as source. Scheme is designed to draw 125 MLD (Intermediate Stage 2034) from Mullaperiyar Dam at Lower Camp, raw water transmission to WTP at Pannaipatti and clear water shall be conveyed to 37 over head tanks (OHTs) by gravity flow.

16. Water Utilisation Committee of Government of Tamil Nadu (Ref. G.O.4D No.6 dated 23 July 2018 of Public Works [W2] Department) has approved water supply proposal for 125 MLD drawal from intake works at Lower Camp, Cumbum.

17. Presently, there are 58 combined and dedicated water supply schemes existing in Mullaperiyar River and Vaigai River between Mullaperiyar dam (source) and Vaigai dam (downstream). Total required quantity for 58 existing schemes is 84.80 MLD (35.63 cusecs). Drinking water supply demand of MMC is 125 MLD (51.09 cusecs). Therefore, total of 209.80 MLD (86.72 cusecs) is required by total 59 drinking water supply schemes between Mullaperiyar dam and Vaigai dam. Details shown in Table 4.

Table 4: Drinking Water Supply Schemes in Mullaperiyar and Vaigai River from Mullaperiyar Dam up to Vaigai Dam

No.	Name of Scheme	O&M Agency	Head works Location	Type of WS Scheme	Scheme Capacity (MLD)
PERIYAR AND VAIGAI RIVER					
A) AT LOWER CAMP					
1	Madurai Municipal Corporation	ULB	Lower Camp	Dedicated	125.00
Total I					125.00
B) FROM LOWER CAMP TO VAIGAI DAM					
2	CWSS TO CUMBUM ValleyTown	TWAD	At Lower camp	CWSS	14.03
3	Kombai – Thevaram - Pannaipuram CWSS (new)	TWAD	Downstream of Periyar Powerhouse	CWSS	2.70
4	C. Pudupatty T.P. WSIS	TWAD	Downstream of Periyar Powerhouse	CWSS	6.94
5	Kombai -Thevaram- Pannaipuram CWSS (new)	TWAD	Downstream of Periyar Powerhouse	CWSS	3.45
6	Kullappagoundanpatty & Kamayagoundanpatty CWSS	LB	K.G. Patty	Dedicated	2.00
7	Kullappagoundanpatty & Kamayagoundanpatty CWSS	LB	At Surulipatty	CWSS	0.14
8	Surulipatty WSS	LB	At Surulipatty	Dedicated	0.48
9	Naarayanathevanpatty CWSS	LB	At Surulipatty	Dedicated	0.48
10	Rayappanpatty WSS	LB	At Surulipatty	Dedicated	0.24
11	Anamalaiyanpatty WSS	LB	Anamalaiyanpatty	Dedicated	0.23
12	Kohilapuram CWSS	TWAD	Anamalaiyanpatty	CWSS	0.85
13	Odaipatty CWSS	TWAD	u/s Uthamapalayam weir	CWSS	2.11
14	Ambasamudram WSS (Near Ammapatty)	LB	Ambasamudram	Dedicated	0.05
15	Ammapatty WSS	LB	Near Ammapatty	Dedicated	0.16

No.	Name of Scheme	O&M Agency	Head works Location	Type of WS Scheme	Scheme Capacity (MLD)
16	Chinnamanur Mpty WSIS	LB	West of Chinnamanur Mpty	Dedicated	1.92
17	Markayankottai and Ellaipatty	LB	U/s Markayankottai bridge	CWSS	0.28
18	Odaipatty TP	LB	U/s Markayankottai bridge	Dedicated	1.94
19	T. Sindalacherry CWSS	TWAD	D/s Markayankottai bridge	CWSS	1.40
20	Kamatchipuram CWSS	TWAD	U/S Kutchanur weir	CWSS	1.10
21	Sankarapuram CWSS	TWAD	U/S Kutchanur weir	CWSS	1.60
22	Veppampatty CWSS	TWAD	U/S Kutchanur weir	CWSS	1.20
23	Seelayampatty	LB	U/S Kutchanur weir	Dedicated	0.36
24	Kutchanur WSS	LB	U/S Kutchanur weir	Dedicated	0.63
25	Kottur	LB	Kottur	Dedicated	0.36
26	B. Meenakshipuram	LB	At Uppukkottai	Dedicated	0.77
27	Kundalnaickenpatty WSS	LB	Kundalnaicken patty	Dedicated	0.24
28	Upparpatty WSS	LB	Kundalnaicken patty	Dedicated	0.13
29	DombuCherry	LB	Kundalnaicken patty	CWSS	0.24
30	Melachokkanathapuram TP WSIS	LB	Kondalnaicken patty	Dedicated	1.57
31	INO WSS	TWAD	Kondalnaicken patty	Dedicated	0.40
32	Kamarajapuram CWSS	TWAD	U/S Uppukottai weir	CWSS	0.70
33	Sillamarathupatty CWSS	TWAD	U/S Uppukottai weir	CWSS	1.70
34	Govindanagaram CWSS	TWAD	U/S Uppukottai weir	CWSS	2.15
35	Veerapandy TP	LB	U/s Veerapandy Bridge	Dedicated	1.33
36	Veerapandy TP WSIS	LB	Veerapandi	Dedicated	1.00
37	Palanichetty patty WSIS	LB	U/s Veerapandy Bridge	Dedicated	1.02
38	Palanichetty patty TP WSIS	LB	Veerapandi	Dedicated	2.00
39	Kodangipatty	LB	D/sVeerapandy	CWSS	0.24
40	Manjanaickenpatty	LB	D/sVeerapandy	CWSS	0.24
41	Thadicherry CWSS	TWAD	U/S Palanichetty patty weir	CWSS	1.40
42	Palanichetty patty WSS	LB	U/S Palanichetty patty weir	Dedicated	0.82
43	Aranmanaipudur	LB	U/S Palanichetty patty weir	Dedicated	0.24
44	Aranmanaipudur WSS	LB	U/S Palanichetty patty weir	Dedicated	0.24
45	Kandamanur & 15 Habitations	CWSS	U/S Palanichetty patty weir	TWAD	0.88
46	Pandian sericulture	Private	Palanichetty patty	Dedicated	0.03
47	Theni Municipality WSS (1 and 2)	LB	Palanichetty patty	Dedicated	4.29
48	Kottaipatty & Mariyayipatty CWSS	LB	Kottaipatty	Dedicated	0.24

No.	Name of Scheme	O&M Agency	Head works Location	Type of WS Scheme	Scheme Capacity (MLD)
49	Palakombai CWSS	TWAD	Near Kunnur	CWSS	2.13
50	Vallalnathi CWSS	TWAD	Downstream of Kunnur bridge	CWSS	1.61
51	Theni Collector Complex WSS		Downstream of Kunnur bridge	Dedicated	0.24
52	Theni Collector Bungalow WSS	PWD	Downstream of Kunnur bridge	Dedicated	0.24
53	Theni Medical college	Private	Arapadidevanpatti	Dedicated	0.56
54	Unjampatty-WSS	LB	Downstream of Kunnur bridge	Dedicated	0.50
55	Unjampatty- Vadapudupatty CWSS	TWAD	Downstream of Kunnur bridge	CWSS	0.58
56	Andipatty rural CWSS (Arapadithevanpatty CWSS)	TWAD	Downstream of Kunnur bridge	CWSS	1.48
57	Andipatty UTP WSS	LB	Downstream of Kunnur bridge	Dedicated	2.30
58	Theni Municipality WSS	LB	Downstream of Kunnur bridge	Dedicated	8.64
Total II				MLD	84.80
Grand Total (I+II)				MLD	209.80
				Cusecs	86.72

CWSS = combined water supply scheme, MLD = million liters per day, O&M = operation and maintenance, TWAD = Tamil Nadu Water and Drainage, ULB = urban local body, WSS = water supply scheme, WSIS = water supply improvement scheme.

18. Honorable Supreme Court of India through Order in W.P. (C) No. 386/2001 dated 27 February 2006 and subsequently through order dated 7 May 2014 "Original Suit No.3 of 2006" permitted Government of Tamil Nadu to raise the water level from 136.00 ft. to 142.00 ft. and ultimately to 152.00 ft. after completion of further strengthening measures on the Mullaperiyar dam.

19. Based on Tamil Nadu Public Works Department (PWD), at storage level of 142.00 ft. as allowed by Supreme Court order, available useful storage capacity is 7,666 MCFT against total storage capacity of 12,758 MCFT. Monthly average storage in Mullaperiyar dam for past 7 years is shown in Table 5.

Table 5: Monthly Average Storage in Mullaperiyar Dam (January 2012 to December 2018)

Year	Monthly Average Storage (MCFT)											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2012	1,932	919	810	1,005	917	1,083	1,063	1,687	2,278	2,128	2,367	1,683
2013	1,327	1,026	1,364	1,288	1,289	2,042	3,607	5,135	3,443	2,559	2,076	2,119
2014	1,623	1,021	1,242	1,070	1,590	1,536	1,883	3,349	4,722	4,364	6,788	5,488
2015	3,034	1,456	1,168	1,200	1,884	2,267	3,559	2,497	1,962	2,262	4,937	7,330
2016	5,044	2,452	1,285	970	993	1,100	2,278	2,284	1,508	912	958	1,177
2017	953	884	917	877	766	755	1,142	1,497	3,260	2,918	3,045	3,914
2018	2,187	1,599	1,317	1,316	1,342	3,190	4,660	6,478	4,561	5,241	4,625	4,099

MCFT = million cubic feet.

Note: Monthly storage based on "average of daily storage level readings".

Source: Public Works Department, Government of Tamil Nadu.

20. Minimum, maximum and mean values are also computed and shown in Table 6.

**Table 6: Abstract of Monthly Storage of Mullaperiyar Dam
January 2012 to December 2018**

No.	Year	Monthly Storage (MCFT)		
		Minimum	Maximum	Average
1	2012	810.48	2,366.58	1,489.35
2	2013	1,025.94	5,134.61	2,272.91
3	2014	1,021.42	6,788.13	2,889.58
4	2015	1,168.13	7,330.16	2,796.46
5	2016	911.90	5,043.77	1,746.77
6	2017	755.23	3,914.23	1,743.98
7	2018	1,316.20	6,477.84	3,384.59
Average of Monthly Average Values		1,001.33	5,293.62	2,331.95

MCFT = million cubic feet.

21. Based on above, it is observed that average of minimum monthly storage from January 2012 to December 2018 is approximately 1,001 MCFT. Details of water release schedule on year-round basis as per Tamil Nadu PWD (Ref.: Lr. No. DB/ JD01/ 384/ C.10 [P]/ 2018, dated 26 December 2018) is shown in Table 7. Required quantity for MMC is scheduled as continuous release for drinking water supply requirements.

Table 7: Water Release Schedule from Mullaperiyar Dam

No.	Description	Demand Type	Duration	Water Release
	EXISTING			cusecs
1	Cumbum Valley Irrigation Scheme	Irrigation	240 days on or after 1 June	200.00
2	PT Rajan Channel	Irrigation	100 days after 1 Oct	100.00
3	Theni District (58 Schemes - Table 1)	Drinking Water	Year Round	100.00
	PROPOSED			
4	Madurai Municipal Corporation Scheme	Drinking Water	Year Round	51.09

Source: Public Works Department, Government of Tamil Nadu.

22. Therefore, year round demand for drinking water supply of 151.09 cusecs per day works out to monthly requirement of approximately 391.65 MCFT per month. Since average value of minimum monthly storage of Mulla Periyar dam from January 2012 to December 2018 is 1,001 MCFT per month and also drinking water supply is given highest priority in National Water Policy and State Government, it is concluded that Mullaperiyar dam source is sustainable for proposed Madurai Water Supply Improvement Scheme of MMC.

23. **Existing Water Supply Schemes in Core City of Madurai Municipal Corporation.** The first protected water supply was provided to Madurai City in the year 1892, through head works at Aarapalayam. Subsequently, considering the increasing population and additional demand, the augmentation for the city supply has been implemented in the years 1924, 1963, 1973, 1985, 1987, 1995 and 2009 respectively.

Table 8: Details of Head Works

S.No.	Components	Description
1	Kochadai Head works	
	Type	Infiltration Gallery
	Year of construction	1924
	Year of Improvement	1940
	Distance from the town	7.00 km
	Motor HP	170 HP
	Pump Duty	Centrifugal, 3,000 GPM (13,620 lpm) at 85 ft (25.91 m) Head
	Length of Infiltration Gallery	218.29 m across the river; 146.35 m u/s & 36.59 m D/S
	Total length of Gallery	1348 ft (411m)
	Collection point	Five manhole wells, two collection wells, and one collection well cum suction well.
	Conveying main	24" dia CI pipes to D' system for District 3,4,5 with bypass connection to Arasaradi GLSR.
	Average Discharge (Capacity)	20.00 MLD
2	Collector Well Head works at Kochadai	
	Year of construction	1973
	Distance from the town	7.50 km
	Diameter of Well	4.00 m
	Depth of well	17.7 m
	Motor HP	135 HP (1+1)
	Pump Duty	Vertical Turbine, 3470 GPM (15754 lpm) at 27.43 m Head.
	Length of Radial Arms	Six directions in two tiers 241 m in top tier and 348 m in the bottom tier.
	Conveying main	24" CI Pipes from Kochadai to GLSR at Arasaradi.
	Average Discharge (Capacity)	11.50 MLD
3	Melakkal Head works	
	Year of construction	1963
	Distance from the town	18.00 km.
	Type	Infiltration Gallery with four manhole wells, one suction well and one collection well.
	Motor HP	55 HP (1+1)
	Pump Duty	3100 GPM (14074 lpm) at 55 ft (16.77 m) Head
	Length of Infiltration Gallery	304.88 m (2 rows of 18" SW pipe with cement filled joints)
	Length of conveying main from Melakkal to Arasaradi Pump station	14.00 m (24" RCC) and 1,562 m (21" RCC)
	Average Discharge Capacity	16.00 MLD
4	Thatchampattu Head works	
	Year of Construction	1985
	Distance from the town	20 km.
	Infiltration wells	3 Nos.
	Diameter of well	4.50 m - 2 nos. & 3.50 m - 1 no.
	Depth of well	9 m - 2 nos. and 10 m - 1 no.

S.No.	Components	Description
	Pump Duty (Submersible)	1,800 lpm / 13m H/ 10 HP - 2 Nos. & 1,140 lpm / 14m H/ 7.5 HP - 1 no.
	Motor HP	90 HP 4741 lpm X 56 m
	Length of conveying main from Thatchampattu to Arasaradi Pump Station	16.70 km; 300 mm Φ pipe
	Average Discharge (Capacity)	4.50 MLD
5	Manaloor Head works	
	Year of Construction	1987
	Distance from the town	15 km.
	Diameter of Collector well	5.0 m
	Diameter of pump house	6.0 m
	Length of Radials	300 mm dia slotted pipes - 210 m
	Pump Duty at Manaloor Head works	25 HP Turbine - 4,741 lpm / 17m Head
	Average Discharge (Capacity)	4.54 MLD
	Length of Pumping main	134 m.
	Thiruppuvanam Head works	
	Year of Construction	1987
	Distance from the town	15 km
	Diameter of Collector well	5.0 m
	Diameter of pump house	6.0 m
	Length of Radials	300 mm dia slotted pipes - 210 m
	Pump Duty at Manaloor Headworks	40 HP Turbine - 4,741 lpm / 27m Head
	Length of Pumping main From Thiruppuvanam to Manalur	300 mm pipes - 3830 m.
	Average Discharge (Capacity)	4.54 MLD
	Common Sump cum Pump house at Manalur	
	Capacity	100,000 liters
	Booster Pump Duty at Manaloor	230 HP - 9,482 lpm / 81m H
	Length of Pumping main From Manalur sump to Service reservoirs at New Ramnad Road and Joseph Park	450 mm cl 15 – 7,000 m 450 mm cl 10 – 5,630 m
	Pump Duty at Thiruppuvanam Head works	40 HP/ 4,741 lpm / 27m H
	Booster Pump Duty at Manaloor	230 HP/ 9,482 lpm / 81m H
	Length of pumping main	3.60 km; 350 mm Φ (Thiruppuvanam to Manaloor); 13.20 km.; 450 mm Φ (Manaloor to Joseph Park)
6	Vaigai Scheme No 1	
	Year of Construction	1995
	Source	Vaigai Dam
	Distance from Town	66 km
	Treatment Plant Capacity	71.6 MLD
	Gravity Conveying main	1000 mm & 1100 mm PSC pipes - 66 km

S.No.	Components	Description
7	Vaigai Scheme No 2	
	Year of Construction	2009
	Source	Vaigai Dam
	Distance from Town	66 km
	Treatment Plant Capacity	47 MLD
	Gravity Conveying main	1,000 mm & 1,100 mm PSC pipes - 66 km

ft = feet, GLSR = Ground Level Storage Reservoirs, GPM = gallons per minute, km = kilometer, m= meter, MLD = million liters per day, RCC = reinforced cement concrete.

Source: Madurai Municipal Corporation.

24. **Status of the existing water supply schemes for core city of Madurai Municipal Corporation.** The Madurai Municipal Corporation supplies water to the Core city from Vaigai dam and sub-surface water supply schemes from Vaigai River. Water supply details are given in the Table 9.

Table 9: Details of Sources and Head Works in Madurai Municipal Corporation

S.No.	Name of Source/Scheme	Type of Source	Present Supply (MLD)	Remarks
Scheme-I				
1	Kochadai	Infiltration Galleries	8.46	Sub-Surface Water/Ground Water
	Kochadai	Collector Well		Not Functioning
2	Thachampathu Melakkal WSS	Infiltration Galleries	14	Sub-Surface Water/Ground Water
Scheme-II				
3	Manalur and Thiruppuvanam	CollectorWells	7	Sub-Surface Water/Ground Water
Vaigai Water Supply Scheme				
4	Vaigai WSS, Line-I	Intake Well Vaigai Dam	68	Surface Water
5	Vaigai WSS, Line-II	Intake Well Vaigai Dam	47	Surface Water
Scheme-III				
6	Vaigai River bed Sources	Infiltration wells	17.54	Sub-Surface Water/Ground Water
Scheme-IV				
7	Melur CWSS	CollectorWells in River Cauvery	30	Sub-Surface Water/Ground Water
	Total		192	--

MLD = million liters per day, WSS = water supply scheme.

Source: Madurai Municipal Corporation.

25. **Total Requirement.** As per the guidelines of the Central Public Health and Environment Engineering Organization (CPHEEO) manual on water supply and treatment, the total daily requirement of water for Madurai Municipal Corporation is as follows:

Table 10: Water Supply Demand Assessments

S. No	Description	Water Demand			Remarks
		2019	2034	2049	
1	Population (in no's)	1,628,945	1,923,936	2,277,889	--
2	Domestic (MLD)	219.90	259.73	307.52	135 lpcd
3	Floating Population (in no's)	200,000	250,000	300,000	
4	Required for Floating Population (MLD)	9.0	11.5	13.2	45 lpcd
5	Fire Fighting Demand (MLD)	4.0	4.5	4.8	100x√Population in 1000s in kilo liters
6	Total Requirement (MLD)	232.90	275.73	325.52	
7	Transmission Loss at 15% (MLD)	41.10	48.66	57.44	As per CPHEEO Norms
	Total Demand	274.0	324.39	382.96	--

CPHEEO = Central Public Health and Environment Engineering Organization, LPCD = liters per capita per day, MLD = million liters per day.

29. **Existing Sustainable Supply.** The sustainable supply from all the existing water supply schemes is tabulated as below:

Table 11: Existing Sustainable Supply

S. No.	Source	Quantity Available
Perennial Source:		
1.	First Vaigai Water Supply Scheme	68.00 MLD
2.	Second Vaigai Water Supply Scheme	47.00 MLD
3.	Cauvery CWSS (allotment upto ultimate period)	21.00 MLD
	Sub-Total (A)	136.00 MLD
Non-Perennial Source (Vaigai River bed source):		
4.	Melakkal & Thachampathu	20.50 MLD
5.	Manaloor & Thiruppuvanam	7.00 MLD
6.	Kochadai	4.00 MLD
7.	Avaniyapuram	4.00 MLD
8.	Thiruparankundram	7.74 MLD
9.	Thirunagar	1.00 MLD
10.	Vilangudi	2.76 MLD
	Sub-Total (B)	47 MLD
	Grand Total (A+B)	183 MLD

CWSS = combined water supply scheme, MLD = million liters per day.

26. **Net Water Supply Requirement for Intermediate Stage 2034.** The net water supply demand for the intermediate year 2034 calculated from the above tables is as follows:

- (i) Total water supply demand for 2034 : **324.39 MLD**

- (ii) Existing Water Supply : 183 MLD
 (iii) Water supply Demand Gap for 2034 : 141.39 MLD

27. The water supply demand gap for 2034, the intermediate requirements shall be fulfilled by this proposed 125 MLD dedicated water supply scheme for MMC from Mullai Periyar River as source of water. Further a deficit of 16.39 MLD shall be augmented by the year 2034. The Water Supply Demand Gap Statement for the Proposed and Existing Water Supply Distribution Zones is shown below

Table 12: Water Supply Demand Gap Statement for the Existing and New Water Supply Distribution Zones

S.No.	Proposed Water Supply Zones	Demand in MLD		
		2019	2034	2049
1	Total Demand	274.00	324.39	382.96
2	Existing Water Supply	183.00	183.00	183.00
3	Proposed Water Supply	125.00	125.00	125.00
4	Total Supply (2) + (3)	308.00	308.00	308.00
5	Demand Gap (1) - (4)	Nil	16.39	74.96

MLD =million liters per day.

Source: Madurai Municipal Corporation.

28. **Scheme-I.** This scheme contributes a partial yield through existing collector well/infiltration galleries installed on Vaigai River bed at Kochadai, Melakkal and Thatchampattu. Through this scheme, water is supplied to the north zone of the city from September to February. Though the design capacity of the head works is about 52.00 MLD, presently about 29.46 MLD of water is available from riverbed.

29. **Scheme-II.** In this scheme, the head works are located at Manalur and Thirupuvanam on Vaigai River bed. Through this scheme, water is supplied to the south zone, through the existing collector well/infiltration well during monsoon season. The design capacity of the scheme is about 9.08 MLD but presently only 7.00 MLD of water is extracted from the head works. Both the collector wells are in the downstream of MMC. Due to the pollution in River Vaigai, the quality of water from the above collector wells are deteriorated and the TDS is in the range of 1300 mg/l. Bacteriological pollution was also observed during lean flow season no flow in the River for dilution. Hence, the collector wells are not functioning for the past four years. A WTP of capacity 5 MLD was constructed near the Manalur Collector well to treat the water with aerator and filter beds having anthracite coal as filter media. Further, the conveying main of 450 mm pipes from Manalur to the New Ramnad Road were damaged in many places during road widening. Hence, the above pipes are now replaced with 450 mm DI K7 pipes by MMC.

C. Proposed Project

30. It is proposed to draw 130 MLD (1630 MCFT/year) of surface water from the proposed check dam in Mullai Periyar River at Lower Camp to fulfill the intermediate demand gap of 125 MLD for MMC.

31. The MMC drinking water need is being managed with the allotted quantity of 1,500 MCFT (115 MLD) at Vaigai dam, 21 MLD from River Cauvery source under Melu CWSS and 47 MLD from Vaigai River bed. The intermediate water supply demand for 2034 (with projected population of 1,923,936) is 317 MLD. From all existing sources the designed quantity of water available is 183 MLD. The water supply demand gap for 2034 is estimated to be 141.39 MLD. To meet the demand gap of 125 MLD the Madurai City Municipal Corporation has analysed the possibilities of

drawal of water from Mullai Periyar River at Lower camp through closed conduits. Further a deficit of 16.39 MLD shall be augmented by the year 2034.

- (i) In G.O. No.872, PWD dated 04 June 1985 Government has allotted 1,500 MCFT from Vaigai dam, through this 115 MLD of water is being drawn every day. There is a huge gap between available quantity and demand.
- (ii) Vaigai dam receives water from Mullai Periyar dam. During summer 200 cusecs of water is being released for water supply demand of Theni & Madurai Districts. The head works in the upstream side of Vaigai dam are tapping 100 cusecs of water for the local bodies in the Theni District but due to evaporation and percolation of loss the remaining 100 cusecs is not reaching Vaigai dam, only 40 cusecs are reaching Vaigai dam.
- (iii) Hence, to avoid evaporation percolation losses, it is now proposed to draw 130 MLD of raw water from Mullai Periyar River at Lower Camp through closed conduits.

Table 13: Water Supply Demand Gap Statement for the Existing and New Water Supply Distribution Zones

Sl.No.	Description	Details
1	Total Number of Zones	81
2	Total number of DMAs	220
3	Number of Existing SRs retained	44
4	Number of Proposed SRs	37
5	Population Base year (2019) Intermediate year (2034) Ultimate year (2049)	1628945 1923936 2277889
6	Demand Base year (2019) Intermediate year (2034) Ultimate year (2049)	274.00 MLD 324.39 MLD 382.96 MLD

Table 14: Service Reservoirs

Sl. No	Location	Zone	Service Reservoir			Feeder Main Size (mm)	Flow (LPM)	Demand (MLD)	
			Capacity (LL)	GL (m)	MWL (m)			2034	2049
1	Semparuthi Nagar	1	18	146.775	168.275	250 mm DI K9	2983	5.236	6.367
2	Park Town	5	13	153.985	175.485	200 mm DI K9	2367	3.8	4.816
3	Indra Nagar	6	15	147	169.5	300 mm DI K9	3009	4.212	5.337
4	Sellur Kanmoi	11	25	142.3	164.3	300 mm DI K9	4120	7.083	8.401

Sl. No	Location	Zone	Service Reservoir			Feeder Main Size (mm)	Flow (LPM)	Demand (MLD)	
			Capacity (LL)	GL (m)	MWL (m)			2034	2049
5	Singarayar Colony	12	25	142.3	164.3	300 mm DI K9	4169	7.150	8.159
6	Sellur Lorry Stand	16	30	137.8	159.8	300 mm DI K9	6077	8.663	9.884
7	KK Nagar Market	20	12	136.9	158.4	200 mm DI K9	2468	3.455	3.947
8	Island Nagar	22	12	143.81	165.31	200 mm DI K9	2094	3.416	4.199
9	EB Colony	23	18	157	179	250 mm DI K9	3049	5.240	6.642
10	Poriyalur Nagar	24	7	148	169.5	200 mm DI K9	1333	1.865	2.365
11	Santhanam Nagar	25	20	146.49 5	168.495	250 mm DI K9	3356	5.671	7.189
12	Shenbagathottam	29	25	134.5	156.5	300 mm DI K9	4530	7.313	9.105
13	SMP Colony	32	10	134.3	155.8	200 mm DI K9	2040	2.856	3.474
14	Thideer Nagar	47	30	140.64	162.64	300 mm DI K9	6264	8.768	10.073
15	Valaithoppu	48	25	137.27	159.27	300mm DI K9	5211	7.294	8.361
16	Gurunathar Koil	53	12	133.5	155	200 mm DI K9	2290	3.495	4.43
17	Chinna Anupanadi Housing	54	15	135.15	156.65	200 mm DI K9	2809	4.425	5.247
18	Villapuram	56	10	136.6	158.1	150 mm DI K9	1467	2.913	3.532
19	MMC Colony - I	57	15	135.66	157.16	200 mm DI K9	2026	4.392	5.567
20	MMC Colony - II	58	10	135.66	157.16	150 mm DI K9	1831	2.895	3.669
21	Vellakkal	60	11	144.5	166	250 mm DI K9	1581	3.088	3.929
22	TVS Park - II	64	25	138.9	160.4	300mm DI K9	5095	7.132	8.184
23	TVS Park - I	66	25	138.9	160.4	300mm DI K9	5215	7.300	8.329
24	Muthupatty	67	20	139.53	161.03	250mm DI K9	4145	5.801	6.812
25	Muthuramalinga puram	69	5	141	162	150 mm DI K9	1487	1.338	1.527
26	Muthuramalinga puram Sump	70	3	141	142.5	100 mm DI K9	531	0.744	0.848
27	Muniyandi Koil	73	4	146.15	167.15	150 mm DI K9	695	1.168	1.405
28	Harveepatti	75	10	149.14 5	170.145	200 mm DI K9	1877	2.848	3.61
29	Balaji Nagar	77	5	146.10 5	167.105	150 mm DI K9	915	1.475	1.87
30	Kurinji Nagar	81	5	159.5	174.5	200 mm DI K9	877	1.480	1.875
	Vaigai-I								
31	Kochadai	34	25	146.9	168.9	300 mm DI	5209	7.291	8.319
	Vaigai -II								
35	VKP Nagar	36	20	141.65	163.65	250 mm DI	4027	5.637	6.432
32	Arapalayam - II	40	12	142.84	169.14	200 mm DI	2450	3.429	3.913
33	AVSS Hospital	45	20	137.8	159.8	300 mm DI	4081	5.713	6.542

Sl. No	Location	Zone	Service Reservoir			Feeder Main Size (mm)	Flow (LPM)	Demand (MLD)	
			Capacity (LL)	GL (m)	MWL (m)			2034	2049
34	Meenakshi Nagar	52	15	133.59	155.09	250 mm DI	3107	4.349	5.072
	8.97 MLD FROM MELUR CWSS								
36	Ulaganeri	27	12	144.2	165.5	200 mm DI K9	2368	3.315	4.225
37	Pandiyan Nagar	28	25	135	156.5	350 mm DI K9	3113	7.285	9.233

32. **Subproject Components.** The detailed project report (DPR) is prepared for the construction of key subproject components including the check dam, intake arrangements and laying of 1,118 mm and 1,067 mm mild steel raw water pumping main to the proposed WTP at Pannaipatti. The detailed description of the subproject components are as follows:

1. Head works

33. The headwork's site is proposed in the right riverbank of Mullai Periyar River, near the downstream of 18th canal check dam. The main components in the Head works are:

- (i) Construction of check dam
- (ii) Construction of 3m dia Semicircular Intake Wells : 4 nos.
- (iii) Construction of collection well : 1 no.
- (iv) 700 mm mild steel connecting pipe : 4 nos.
- (v) Construction of protection wall for Head Works site : 1 no.

Figure 3: Satellite imagery of Mullai Periyar Dam



Snapshot 1: Proposed Head Work Site and check dam location



2. Check dam

34. It is proposed to draw 130 MLD raw water from Mullai Periyar River at Lower Camp by the construction of check dam across the River in the downstream of 18th canal check dam. The MSL of the riverbed at 18th canal check dam and the proposed check dams are 477.40 m and 474.00 m respectively. Due to this steep gradient of river course, the depth of flow shall be 2.0 m for maximum flow of 2,100 cusecs and 45 cm for minimum flow of 200 cusecs.

35. During the peak summer season (lowest flowrate), the minimum quantity of 200 cusecs (17,800 MLD) is released to meet the drinking water requirement of Madurai and Theni Districts. In this subproject, there will be four 700 mm diameter mild steel connecting pipes that will abstract 130 MLD (4 x 32.50 MLD) of raw water from the river. Minimum 1.5 m depth of water head is required in the river. To ensure the minimum 1.5 m water is achieved all throughout the year, a check dam will be constructed across the River Mullai Periyar. The check dam for this subproject will have sluice gates (upstream and downstream of the shutters) and smooth concrete bed apron to ensure free water flow occurs even during lean flow season thus ecological flow in the river will be maintained. The PWD authorities will manage and supervise the construction of the check dam.

Snapshot 2: Existing Check Dam for Cumbum Valley Water Supply Project



3. Intake Arrangements

(i) 3 m diameter Semicircular Intake wells – 4 nos.

36. It is proposed to construct 4 nos. of 3 m diameter semicircular intake wells along the protection wall proposed in the riverbank side at 3 m interval. These intake wells are provided with suitable screening arrangements. Through each intake wells, 32.50 MLD of water shall be drawn from the proposed check dam.

(ii) Construction of collection well

37. It is proposed to construct a collection well with silt trap at head works to collect 125 MLD of water from 4 nos. of intake wells through 4 rows of 700 mm mild steel connecting pipes.

(iii) Protection wall

38. The existing ground level of the head works site is 476.50 m. The actual ground level of the existing head works of Cumbum Valley Water Supply Project is 478.50 m. Hence, it is necessary to raise up the existing ground level up to 478.50 m. Therefore, a protection wall is proposed all around the head works site to raise the ground level up to 478.50 m by filling with imported earth. The proposed protection wall at Head Works site is 200 m x 60 m.

Salient details of proposed head works at lower camp

Check dam

Average G L	:	478.50
River Bed Level	:	474.00
Crest Level	:	476.50

Head works site

Existing Average G L	:	476.500
Proposed G L	:	478.500

Semi Circular Intake

Wells – 3 m Dia	:	4 nos
Average G L	:	478.500
Bed Level	:	474.300
MFL	:	478.000

Collection Wells	:	1 no
Average G L	:	478.500
LWL	:	473.500
MFL	:	478.000

Connecting main	:	4 nos
700 mm Dia mild steel pipes	:	4 x 30 m

Protection wall around

Head works site	:	200 m x 60 m
------------------------	---	---------------------

39. **Raw water pumpset.** The pumpsets are designed for the requirements at an intermediate stage (year 2034). It is proposed to install 6 vertical turbine pump sets (each 280 HP), each with a capacity of 23,555 lpm against a head of 38 m, four would be working and two would be standby with a total pumping capacity of 94,210 lpm to meet the intermediate stage demand. The design is based on 23 hours pumping rate.

40. **Raw water pumping main.** As sufficient land is not available near the head works location for the construction of WTP, it is proposed to pump the raw water to Pannaipatti, where the new WTP (125 MLD capacity) is proposed. The raw water pumping main is proposed for a length of about 95,740 m & 1067 mm x 10 mm thick MS pipe – 69 kms, 1118 mm x 10 mm thick MS pipe – 26.740 for conveying raw water from intake well, located at the bank of the River Mullai Periyar, to the proposed water treatment plant to deliver 125 MLD of raw water to meet the estimated demand for the Year 2034. The materials for pipelines will be selected as per the

guidelines and pipe policy issued by Tamil Nadu Water and Drainage Board or Government of Tamil Nadu pipe policy. The pipeline is designed to meet the ultimate demand.

41. The proposed raw water pumping main has to cross the bridges as shown in the Table 15 and accordingly suitable pipe carrying bridges are proposed. The status of approval is enclosed in Appendix 13.

Table 15: Proposed Pipe carrying bridges

S. No.	Location	MS Pipe size	Length in meters
I. Headworks - Sengkulam stand post			
1.	Kovanoothu bridge at LS: 2,355 m	1,422 mm	110 m
2.	Uthamapalayam at LS: 25,400 m	1,219 mm	100 m
II. Sengkulam stand post - Pannaipatti WTP			
1.	Aranmanai Pudur at LS: 22,100 m	1,219 mm	100 m
2.	Kunnoor at LS: 23,590 m	1,219 mm	150 m
3.	Vaigai Dam Pickup Weir at LS: 37,410 m	1,219 mm	200 m
4.	Varaganathi at LS: 45,270 m	1,219 mm	140 m
5.	Punnukuthi Odai at LS: 47,850 m	1,219 mm	140 m

m = meter, mm = millimeter, WTP = water treatment plant.

Source: Madurai Municipal Corporation.

42. Further, there are one railway crossing come across the raw water pumping main at Theni - Aranmanai Pudur road junction and two railway crossing come across the clear water transmission main the Karuppatti Railway Station – Thatchampathu Road and Madurai – Solavanthan Main. Necessary provision has been provided in the estimate for this railway crossing.


Table 16: Details of Railway Crossings

Description	Location	Chainage	Length in Meters
Railway Crossings	Near Karuppatti Railway Station	30,500 m	60
	Near Thachampathu	36,500 m	60

Source: Madurai Municipal Corporation.

43. **125 MLD Full Scale Water Treatment Plant.** The proposed WTP will be constructed in 5.2acre land proposed near the existing WTP at Pannaipatti Village, Nilakottai taluk, Dindigul District. The treatment plant layout has to be planned to treat 125 MLD of raw water (ultimate stage requirement). The land proposed for WTP is corporation own land. The proposed WTP will be based on conventional treatment process with full scale treatment involving coagulation, flocculation, sedimentation, filtration process, disinfection etc. The construction of WTP is proposed under design and build basis as per the process specified to suit the available site. Since the raw water is not suitable for the drinking purpose, the water treatment plant is proposed to treat raw water to meet the drinking water standards and supplied to consumers.

Figure 4: Proposed Water Supply Scheme Flow Diagram

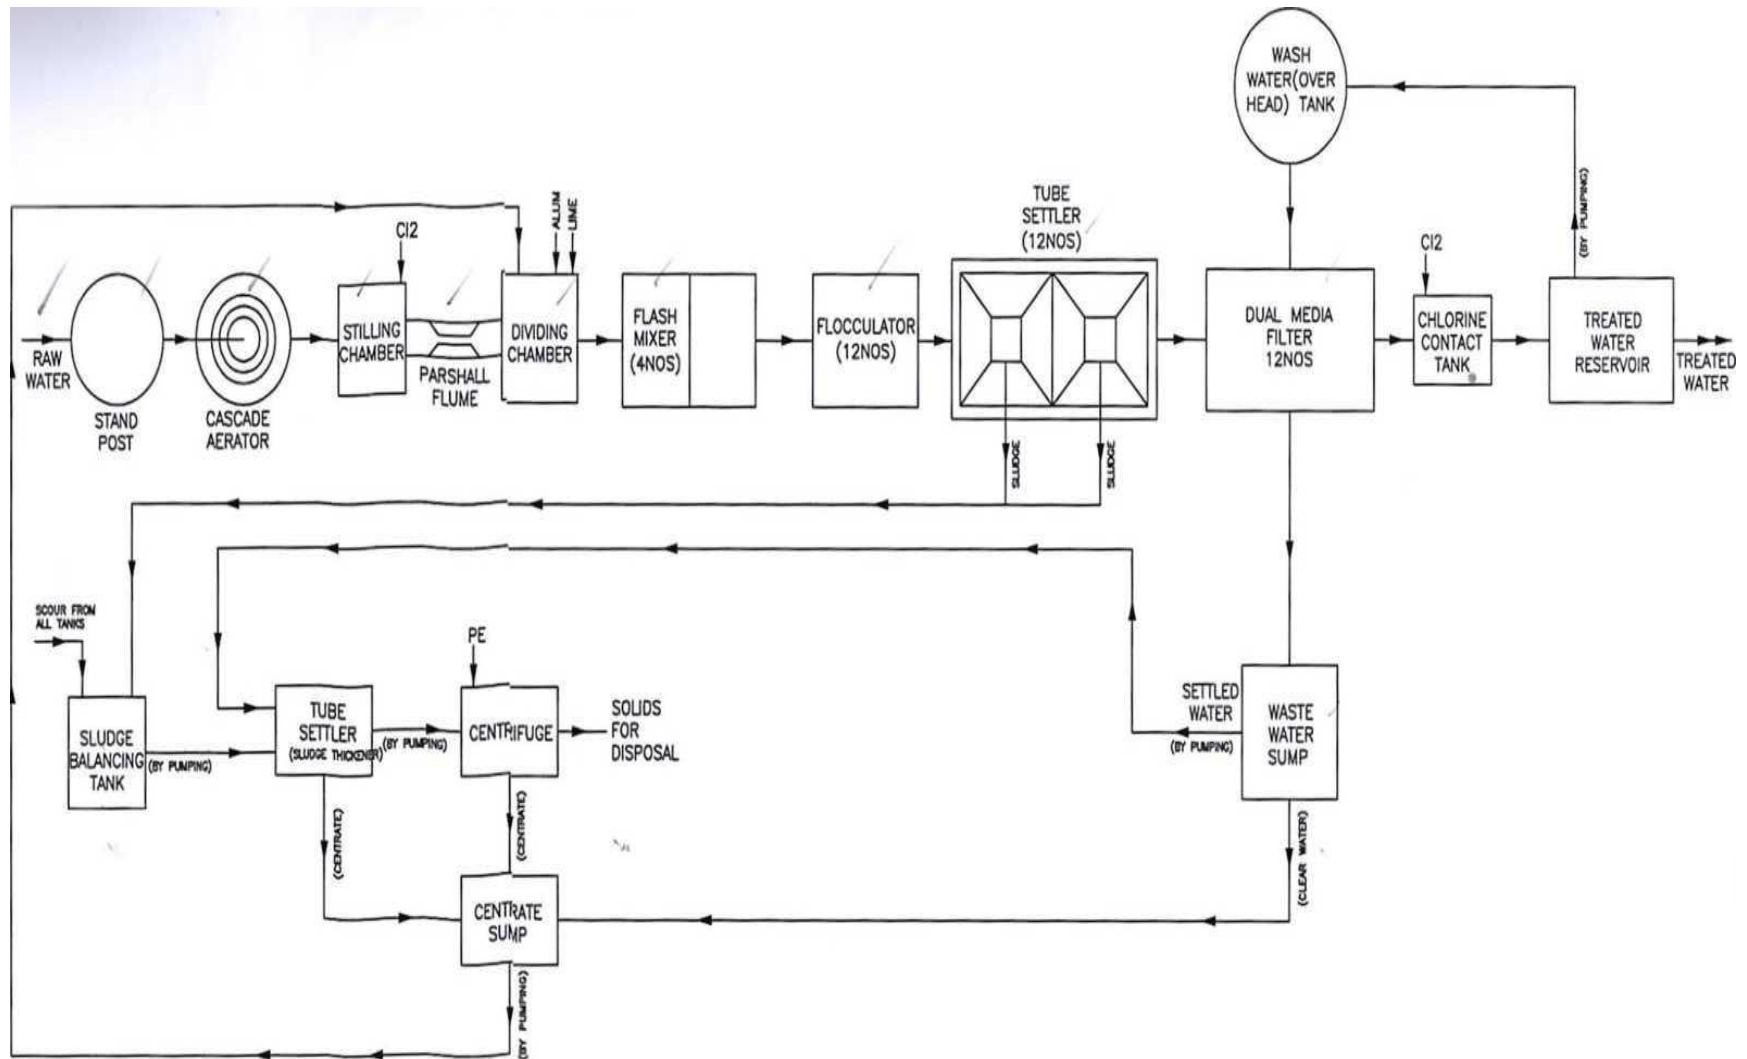

4. Design Process

44. The design of the WTP shall be in compliance with the requirements of CPHEEO manual of water supply and treatment, third edition 1999 published by the expert committee of Central Public Health & Environmental Engineering Organisation, Government of India and relevant Bureau of Indian Standard (BIS) codes of practice. The source of water is from Mullai Periyar River at Lower camp through closed conduits.

45. The WTP will be constructed through DBOT basis, it shall be designed for continuous operation to produce net output of 125.00 MLD in 24 hrs by approved design by Anna University. (Considering raw water intake available is 130 MLD with 4 % losses in WTP) operation of treated water to specified quality standard. The treatment plant scheme shall broadly comprise of cascade aerator, parshall flume, flash mixer, flocculator, tube settler, Dual media filter, Wash water tank, Chlorine mixing tank, Sludge balancing tank, Sludge thickener (Tube settler type) and Centrifuge for delivering treated water of specified physical, chemical, and bacteriological quality. The sludge from the settler shall be taken to the sludge balance tank and from there to discharge to drain nearby. Dirty backwash from the filters is routed to the used backwash recovery tank from which the supernatant is recycled back to the inlet chamber of WTP and the sludge generated is stored and disposed to ULB approved disposal/ processing facility. The design basis considered for the water treatment plant is as given below.

5. Design Capacity of the plant

- (i) Net output capacity: 130 MLD over 24 hours operation (4.0% losses in WTP); and
- (ii) All Channels / Pipes / Valves / Weirs: Designed for 20% overloading conditions.

6. Treatment Philosophy

46. The water treatment plant is designed for a treated water output of 125 MLD in 24 hours. The hydraulics of the treatment plant is designed in such a way that water flows by gravity from the cascade aerator to the existing clear water reservoir and the sludge generated from the settler is routed to the sludge balancing tank.

- (i) Broadly, the flow scheme comprises the following process units:
 - Stand post of Capacity 10 LL with 6.4 M Staging: 1 No
 - Cascade Aerator: 1 No
 - Parshall Flume: 1 No
 - Flash Mixers: 2 Nos
 - Flocculators: 12 Nos
 - Tube Settler: 12 Nos
 - Wash water tank: 1 No
 - Chlorine Mixing Tank: 1 No
 - Sludge Balancing Tank: 1 No

- Sludge thickner (Tube settler type): 1 No
- Centrifuge

7. Process Description

47. **Stand post** (of capacity 10 LL): The available residual head in raw water transmission main at Pannaipatti WTP site is 19.47 m. To maintain the required residual head over the Aerator, a stand post of 10 LL capacity with 6.4 m staging height is proposed at WTP site to receive the 130 MLD of raw water from the raw gravity transmission main.

48. **Cascade Aerator cum stilling (Inlet) Chamber.** The raw water will be fed into cascade aerator to remove odour, from which it is received in the stilling chamber of 1 minute's detention time for a design flow for 130 MLD at 24 hrs operations.

49. **Parshall Flume.** The water from stilling chamber then flows through channel installed with Parshall flume where flow measurement instrument is installed to monitor and record flow through the channel. Pre-chlorination is done by means of chlorine solution through diffusers installed to control organics.

50. **Flash Mixer.** The flash mixer is designed to achieve an intimate mixing of raw water with alum and lime dosed into the raw water. Each flash mixer is constructed in reinforced cement concrete (RCC) with 60 seconds retention time and provided with agitator.

51. **Flocculator.** The overflow from the flash mixer shall enter the channel leading to flocculator for further agglomeration. The unit is designed for 25 minutes retention time. In order to keep velocity gradient in the range of 20 to 75 s^{-1} paddles are provided.

52. **Tube Settlers.** The flocculated water enters the tube settlersto undergo the sedimentation process and the clarified water flows through launder plates and enters into a common clarified water channel, which leads to the filter inlet channel. The sludge is collected at the hopper bottom.

53. In this proposal, 12 Nos. of flocculators, each equipped with vertical mixing facilities and tube settlers are provided sequentially to attain flocculation and solid liquid separation operations.

54. Tube settlers are gravity settlers wherein the tubes are provided in an inclined fashion to increase the surface area of separation of solids from the liquid. The basic theory of tube settlers is that it reduces the detention period to few minutes and achieves the required settling of the turbidity, in comparison with conventional settling basin having detention period of 2-4 hours. This is possible because of the vast area for settlement offered by the tubes installed within the clarifier unit. The area of settling basin is reduced with the high over flow rates viz. to the extent of two to three times higher than convention basins.

55. The flocculated water is fed into the feed basin centrally located in the gravity settler. The Tube settler is characteristically provided with steep bottom hoppers. Heavy flocs will settle faster in the hopper of the tube settler while the light particles enter the inclined tubes. Due to a very low velocity of particles inside the tube and also due to the large surface area of the tube, the flocs agglomerate to bigger size and slide down from the tubes into the hopper, which are then removed as sludge from the tube settlers. As the units are provided with steep hoppers, there is no need to provide any sludge scrapping/ collection mechanism.

56. **Dual Media Filter.** The clarified water from the tube settlers enters into the common filter feed channel. Each filter is designed for a filtration rate of 166 $l/m^2/min$. Sand-anthracite filter or

dual media filter is primarily used for the removal of turbidity and suspended solids as low as 10-20 microns. Dual media filters provide very efficient particle removal under the conditions of high filtration rate. Internally, the dual media filter is fitted with an inlet distributor and a bottom collecting system. Sand is used to remove the suspended particles and anthracite is used to remove the odour and colour so as to make the water fit for different applications. Gravel (pebbles) are provided as support to the media. Periodically, the sand-anthracite filter will backwash, which changes the water flow through the sand-anthracite filter.

57. As per the agreement, the filtered water will be collected through the underdrain system comprising of perforated pipes and manifold, and flow in to an outlet chamber..

58. **Chlorine Mixing Tank.** The filtered water passes through a chlorine contact tank where post chlorination is done.

59. **Sludge System.** The sludge generated from the settler is routed to the sludge-balancing tank from where the sludge is to be discharged as per the direction of Corporation.

60. **The duly verified full set of design and drawings are designed are signed and enclosed as annexures.**

61. A chemical storage house of RCC framed structure construction with brick walls, with rooms having proper corridor approach, with proper natural lighting & ventilation is provided. There shall be access, to first floor and roof by means of stairs with filtered water connection in each floor for floor washing and for water required for preparing chemical solutions. The liquid chlorine cylinder (18-20 nos) will be stored in the room and other chemicals like alum & lime (15–20 T) will be stored for treatment system.

62. **Safety and/or Precaution.** When working with chlorine Wear glasses, masks, gloves, rubber boots, PVC aprons, use hood mask, airline mask and breathing apparatus. In case of chlorine leakage, the following instructions will be followed:

- (i) If the leakage cannot be stopped, inform to the supplier. If not able to find the supplier, call the closest producers;
- (ii) A capable, implemented staff having enough equipment must interfere the leakage. Move the other staff over a high place by taking the wind at backside. If the leakage is so thick, take all the staff away;
- (iii) To find out the leakage pour ammonia into the suspicious area. A white smoke exists if there is a leakage. Control all the equipments at least once a day;
- (iv) If the leakage is in the equipment or in pipes, close the chlorine input valve and transfer the pressured chlorine to an absorption system;
- (v) If possible, decrease the pressure in container by transferring the gas to process or drainage system. Use an emergency bag. Inform to supplier. If not able to find the supplier, call the closest producer and ask for help. It is forbidden to transfer chlorine with leaking containers; and
- (vi) Do not use water in chlorine leakages. Never put the chlorine cylinder or container to water or a liquid chemical mass. Prepare an absorption solution containing caustic soda and soda ash in a tank. For emergency reasons, keep these chemicals available for preparation of solution. Never put the leaked chlorine cylinder or container to absorption tank.

63. **Storage.** Chlorine cylinders, full or empty; should be stored in a dry and cool place and kept away from all kinds of sources of heat. Do not store beside elevators or ventilation systems. The places underground should not be preferred for storage.

- (i) The storage temperature must not be over 55°C. These cylinders must be stored away from other compressed gas containers. Do not store near turpentine, ether, hydrocarbons, other flammable substances, ammonia and metal granules. Despite of oxidation risk keep the warehouse clean;
- (ii) Should be stored where the daily controls and transportation of the full containers can be done with the least effort; and
- (iii) Keep the full and empty containers in different places. Keep small cylinders vertical and bigger ones horizontally.
- (iv) The chlorine consumption per day will be around 1 tonne, therefore, the yearly consumption will be 365 tonnes.

64. **Conclusion and Recommendations.** Based on this process design, the proposed 125 MLD WTP would meet the drinking quality standards for the inlet characteristics mentioned by the proponent. The sizing of various units of proposed WTP is adequate to meet the requirements.

65. The following are the steps ensured by contractor for effective treatment and sustainability of the proposed 125 MLD water treatment plant.

- (i) Analysis of samples at various units will be done at regular intervals in order to study the performance of each operation and process.
- (ii) The quantity of alum and lime required for coagulation process is to be decided based on raw water quality such as turbidity, alkalinity and pH during operation.
- (iii) The fluctuation in raw water quality is to be considered while operating the chemical dosing system. Jar test will be periodically conducted while deciding optimum coagulant dosage.
- (iv) The chlorine required for pre and post chlorination process will be decided based on chlorine demand and residual chlorine level as per BIS norms.
- (v) A water testing laboratory with appropriate equipments will be established within the WTP premises to conduct jar test, chlorine demand and also water quality parameters such as turbidity, alkalinity, pH etc.
- (vi) The carryover of filter media along with wash water during backwashing operation will be avoided. Also the stratification of filter media will be restored after backwashing.
- (vii) Proper handling and drying of sludge from centrifuge will be ensured.
- (viii) Safe storage and handling of chemicals in the WTP will be ensured.
- (ix) Chlorine sensors with alarm system will be installed in the WTP to monitor the accumulation of chlorine gases.

- (x) Adequate standby units/spare parts will be provided for various mechanical operations such as pumping, mixing, dewatering, backwashing etc.
- (xi) The WTP will be operated by qualified personnel and records will be maintained to establish sustained performance.
- (xii) All workers will undergo periodic examinations by occupational physician to reveal early symptoms of possible chronic effects or allergies.
- (xiii) Proper protective equipment will be given to the personnel involved in cleaning and dewatering of various reactors, alum solution tank and chlorinator
- (xiv) Training for personnel will be given on Standard Operating Procedures (SOPs) for Health & Safety applicable for WTP in line with CPHEEO manual.

66. **Hydraulics.** Top water level of existing treated water reservoir is considered as 229.5 m, accordingly hydraulics shall be designed.

67. **Clear Water Gravity Transmission Main.** The treated water from the clear water reservoir will be conveyed by gravity to the proposed 37 OHTs (35 from Mullai Periyar, 2 from Cauvery CWSS and 1 sump) within the Madurai Municipal Corporation area. The total length of gravity clear water main and feeder mains from the WTP to the OHTs is around 54.5 km with a diameter of 1,422 mm. The clear water main is proposed to be laid along the PWD channel, SH, Rural Road and Vaigai River Bank upto the city limit. After crossing NH 7, the alignment will be in line with the state highways and local roads.

Table 17: Details of Clear Water Transmission Main

Chainage of Clear Water Main from Collection Sump (m)	Length (km)	Diameter (mm)	Pipe Thick (mm)	Pipe Material
LS 0 to 54,435	54.435	1422	12.50	MS

km = kilometer, m = meter, mm = millimeter.

8. Feeder Mains

68. **MS Feeder Main.** The 125 MLD of water received from the clear water transmission main is distributed to the Service Reservoirs through feeder mains of sizes varies from 150 mmΦ to 600 mmΦ DI pipes and mild steel pipes. In this proposal, mild steel pipe feeder mains are accounted as given below.

914 mm x 8 mm thick mild steel pipe	:	6,845 m
711mm x 6.3 mm thick mild steel pipe	:	1,840 m
813 mm x 7.1 mm thick mild steel pipe	:	2,800 m

69. **DI Feeder Main.** The Madurai Municipal Corporation (MMC) has prepared two DPRs for water supply distribution system, one for added area and another one for Madurai Core City, which is under government approval. In these two DPRs there are 81 water supply distribution zones have been proposed for equitable distribution of water. In this 81 water supply distribution zones, 44 zones are proposed with existing service reservoirs and 36 zones and 1 sump are with

newly proposed service reservoirs (covered under this proposal). In this project, it is proposed that 37 zones are covered by 125 MLD of water from Mullai Periyar River to feed 34 nos. of newly proposed service reservoirs and 3 zones covered by 8.97 MLD of water supply from Melur CWSS to feed 2 nos. of newly proposed service reservoirs and also 3.50 LL/day water is supplied to The Chennai High Court Branch, Madurai from 8.97 MLD water supply from Melur CWSS.

70. For the 914 mm x 8 mm, 813 mm x 7.1 mm and 711 mm x 6.3 mm thick mild steel feeder main Vaigai River Crossing at LS 54,435 m, pipe protection barrier wall has been provided across the Vaigai River for a length of 11,485 m and feeder main for DI K9 pipes of 83530 m, so gnat total feeder main is 95015 m

71. **Storage reservoirs.** The entire MMC area is presently divided into hundred water distribution zones based on the elevation of the city. These zones will have OHT, which will directly receive water from existing and proposed water supply scheme. Totally 80 OHT are required as storage reservoirs (existing OHTs = 44, proposed OHTs = 37). Out of 37 OHT's, 35 OHT's are being constructed under the AMRUT scheme by MMC, balance 2 OHT's are being constructed under the Cauvery CWSS and 1 sump.

72. **Distribution Network.** MMC is proposed to improve, the distribution network improvement scheme for a length of 855 Km in 34 distribution zones covering 28 wards in Madurai Municipal Corporation.

73. **Status of the water supply distribution system in Madurai Municipal Corporation.** The MMC encompasses 4 administrative zones consisting of 100 wards and 81 water distribution zones. Madurai Municipal Corporation proposes to provide distribution system to all the zones including added areas in phases. Distribution system for 8 distribution zones are being implemented under Smart City funding (77.02 Crores). Distribution system for 34 distribution zones (252.35 Crores) will be implemented under ADB funded TNUFIP and balance 39 distribution zones will be covered under the newly identified funds.

Table 18: Phase wise Salient Details

Sl.No	Description/Phase	Phase - I - Smart City ABD Area - 8 Zones (Zone - 37,41 to 44,46 to 48)	Phase - II - ADB Funded Area - 34 Zones (Zone - 1,2,4 to 10,23 to 25,27, 28,52, 53, 57 to 63,71 to 81)	Phase - III – Balance Area - 39 Zones (Zone - 3,11 to 22,26,29 to 32,33 to 36,40, 45,49, 51, 54 to 56, 64 to 70)	Total
1	Ward (Full)	15	28	57	100
3	Area (Sq.km)	5.81	86.09	56.09	147.99
4	Area (Acre)	1436.68	21273.09	13859.30	36569.07
5	Existing SRs	6	17	21	44
6	Proposed SRs	2	17	18	37
7	D System Zones	8	34	39	81
8	DMA	27	78	115	220
9	North of River Vaigai (Zones)	-	14	18	32
10	South of River Vaigai (Zones)	8	20	21	49

Sl.No	Description/Phase	Phase - I - Smart City ABD Area - 8 Zones (Zone - 37,41 to 44,46 to 48)	Phase - II - ADB Funded Area - 34 Zones (Zone - 1,2,4 to 10,23 to 25,27, 28,52, 53, 57 to 63,71 to 81)	Phase - III – Balance Area - 39 Zones (Zone - 3,11 to 22,26,29 to 32,33 to 36,40, 45,49, 51, 54 to 56, 64 to 70)	Total
11	Zones - Core Area	8	-	32	40
12	Zones - Added Area	-	34	7	41
13	Households	45532	118190	159980	324096
14	Road Length (Km)	137.12	649.02	815.69	1601.83
15	Project Cost (Crores)	77.02	270.0	325.0	672.02

74. **Cost Estimate.** The Detailed Estimate has been prepared adopting the rates of prevailing Schedule of Rates 2019-2020. The overall abstract for the comprehensive improvement of the Distribution system with the breakup based on the funding pattern is as below.

Table 19: Phase wise Salient Details

Water supply project in Madurai City Municipal Corporation - Package IV (Distribution network system phase wise)			
Sl.No	Cost Estimate	Phase - II ADB Funded Area - 34 Zone (1, 2, 4 to 10, 23 to 25, 28, 54, 53, 57 to 63, 71 to 81)	Phase - III BalanceArea - 39 Zone - (3, 11 to 36, 38 to 40, 45, 49 to 51, 54 ,55, 56, 64 to 70)
	Distribution System		
1	Materials	5993.9	7035.22
2	Civil	3805.27	4457.12
3	House Service Connection	4845.54	6167.26
4	Road Restoration Charges	5417.38	6596.12
5	Instrumentation	354.51	495.45
6	Booster Pump	39.43	45.43
	Pumping Main from Sump to GLSR (Zone – 69)	--	39.24
	Collection well of 1.50 LL capacity at zone 69	--	15.58
	Total Cost (A)	20456.03	24851.41
7	GST on Total - A @ 12%	2454.72	2982.17
	Total Cost (B)	22910.75	27833.58
8	Contigencies @ 2.5 % on (A)	511.40	650.00
9	Labour Welfare cost @ 1% on (A)	204.56	325.00
10	Provision for centage (2.5 %) on (A)	511.40	812.50
11	Price Escalation for I year @ 5% on (A)	1022.80	1242.57

Water supply project in Madurai City Municipal Corporation - Package IV (Distribution network system phase wise)			
Sl.No	Cost Estimate	Phase - II	Phase - III
		ADB Funded Area - 34 Zone (1, 2, 4 to 10, 23 to 25, 28, 54, 53, 57 to 63, 71 to 81)	BalanceArea - 39 Zone - (3, 11 to 36, 38 to 40, 45, 49 to 51, 54 ,55, 56, 64 to 70)
12	Price Escalation for II year @ 70% on Ist year	715.96	869.80
13	Shifting of underground utilities (Telephone lines, EB lines and other components)	400.00	200.00
14	Charges to be paid to State Highways, National Highways	578.65	400.00
15	Proof Checking @ 0.15% of (A)	30.68	48.75
16	Third Party quality check @ 0.23% for materials	13.79	16.18
17	Quality Control and testing (samples)	100.00	101.62
	Grand Total -(D)	27000.00	32500.00

D. Implementation Schedule


75. The Package 1 (headworks & raw water main) and Package 3 (clear water main, feeder mains and construction of service reservoirs) work orders have been issued and work are to be commenced. Construction will take about 30 months to complete. For package 2 (construction of WTP & Supervisory Control and Data Acquisition [SCADA] arrangements), word order has been issued and work is in progress. Construction period for WTP is 24 months. The distribution system proposed under TNUFIP will be taken up under Package 4.

Table 20: Package wise Details

Package wise Details			
Sl.No	Package	Awarded Date	Completion Date
1.	Package I	27.05.2020	27.05.2023
2.	Package II	22.07.2019	21.05.2022
3.	Package III	27.05.2020	27.05.2023
Distribution system network will done in Phased Manner			
4.	Package IV	ADB accorded NOC for price bid evaluation report on 25.02.2021. Tender placed before tender awards committee.	

Figure 5: Proposed Water Supply Scheme Flow Diagram

DEDICATED WATER SUPPLY SCHEME FOR MADURAI CORPORATION FLOW DIAGRAM
MULLAI PERIYAR SCHEME - 125 MLD

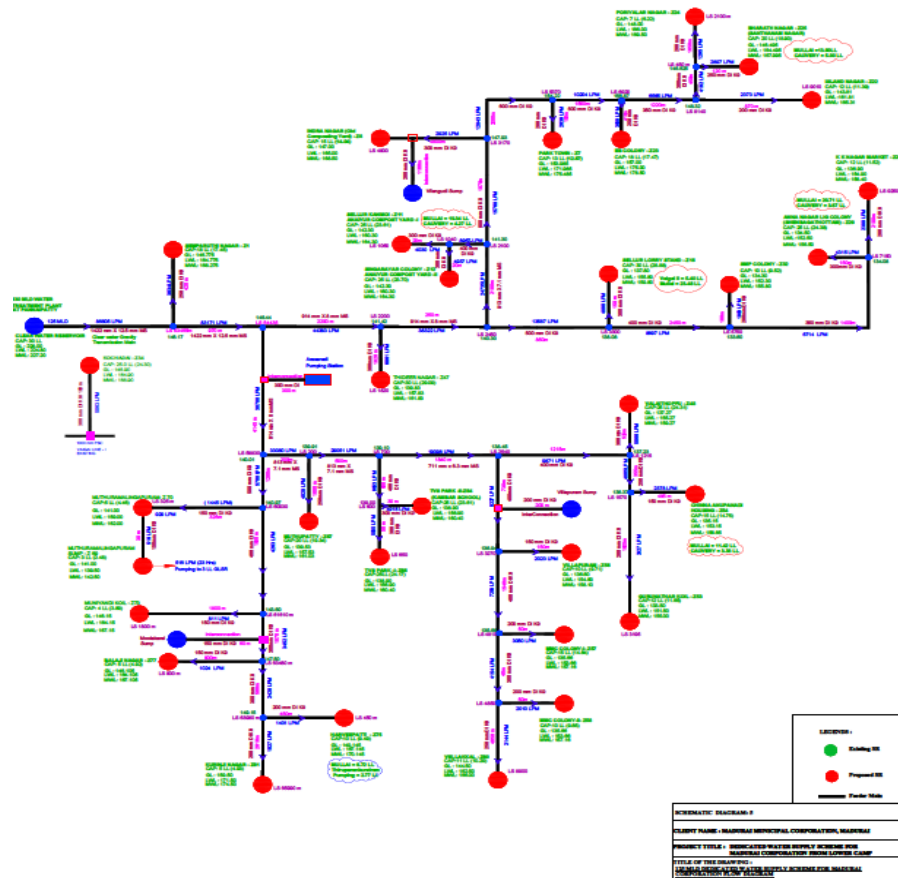


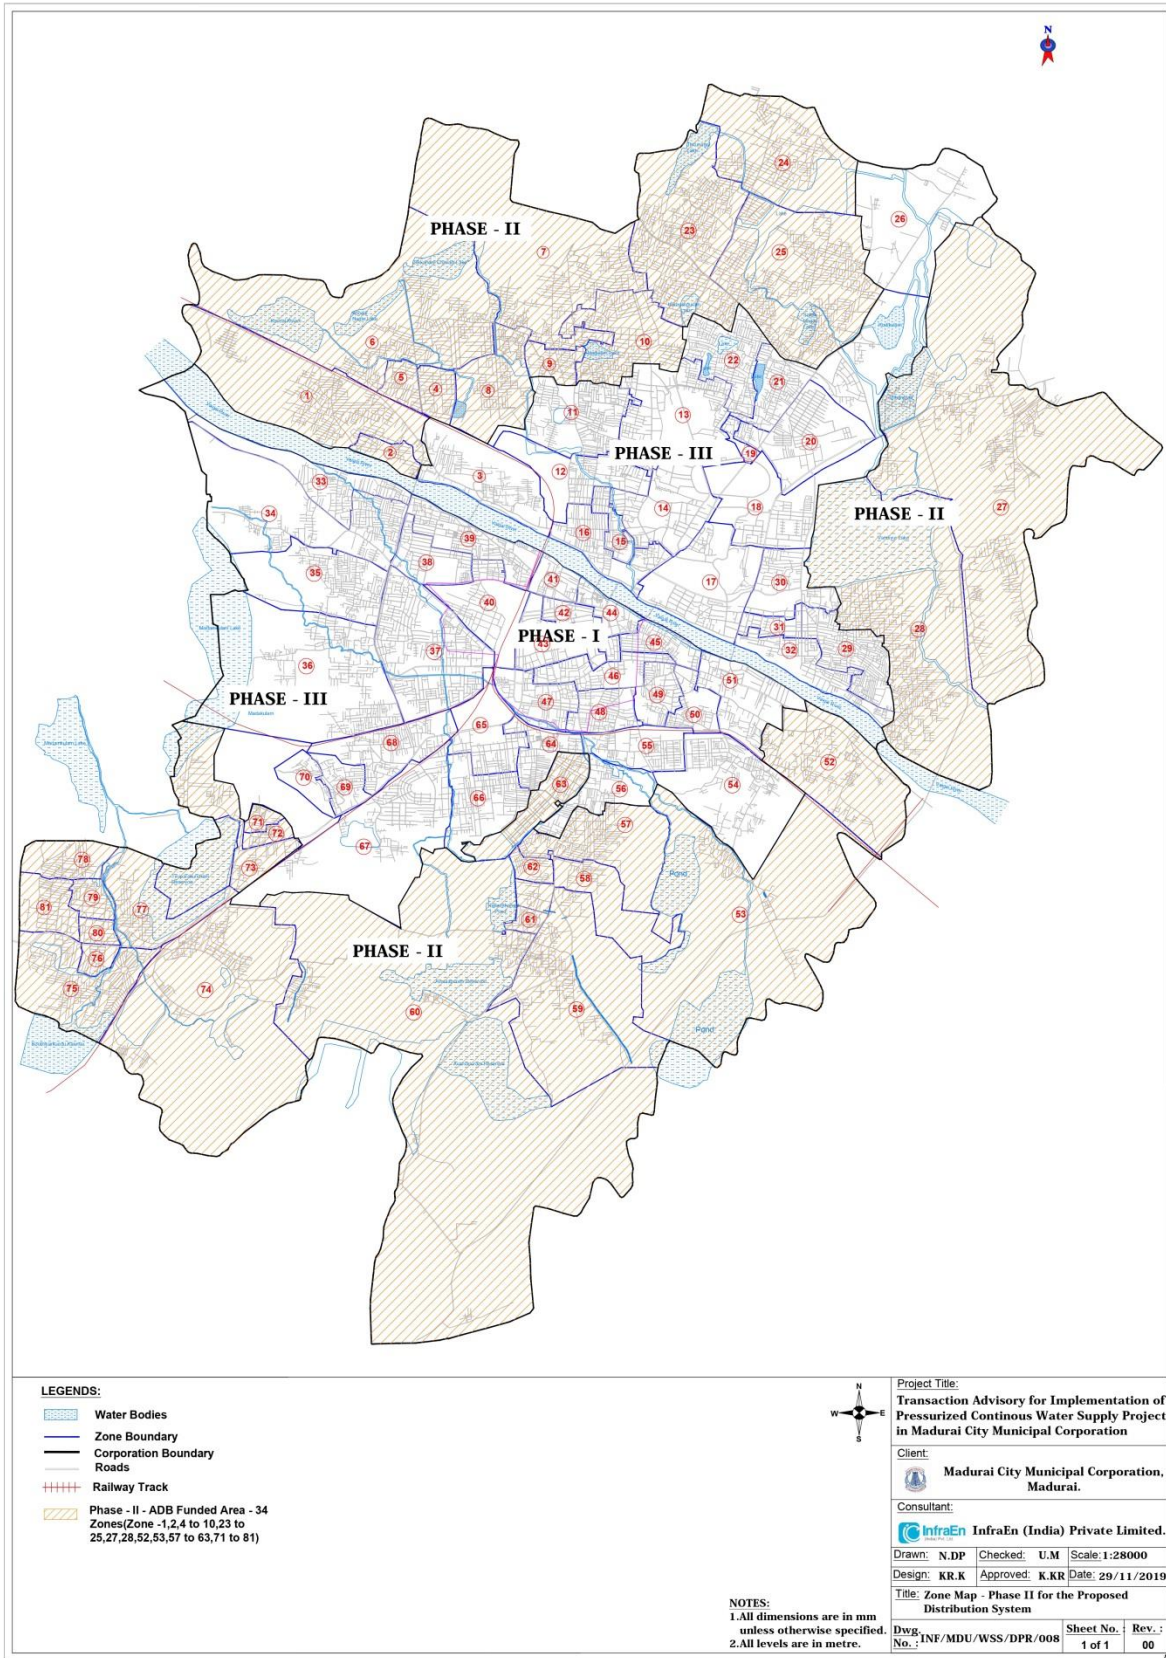


Figure 7: Map Showing Pipeline Drawing for Water Supply to Madurai Municipal Corporation

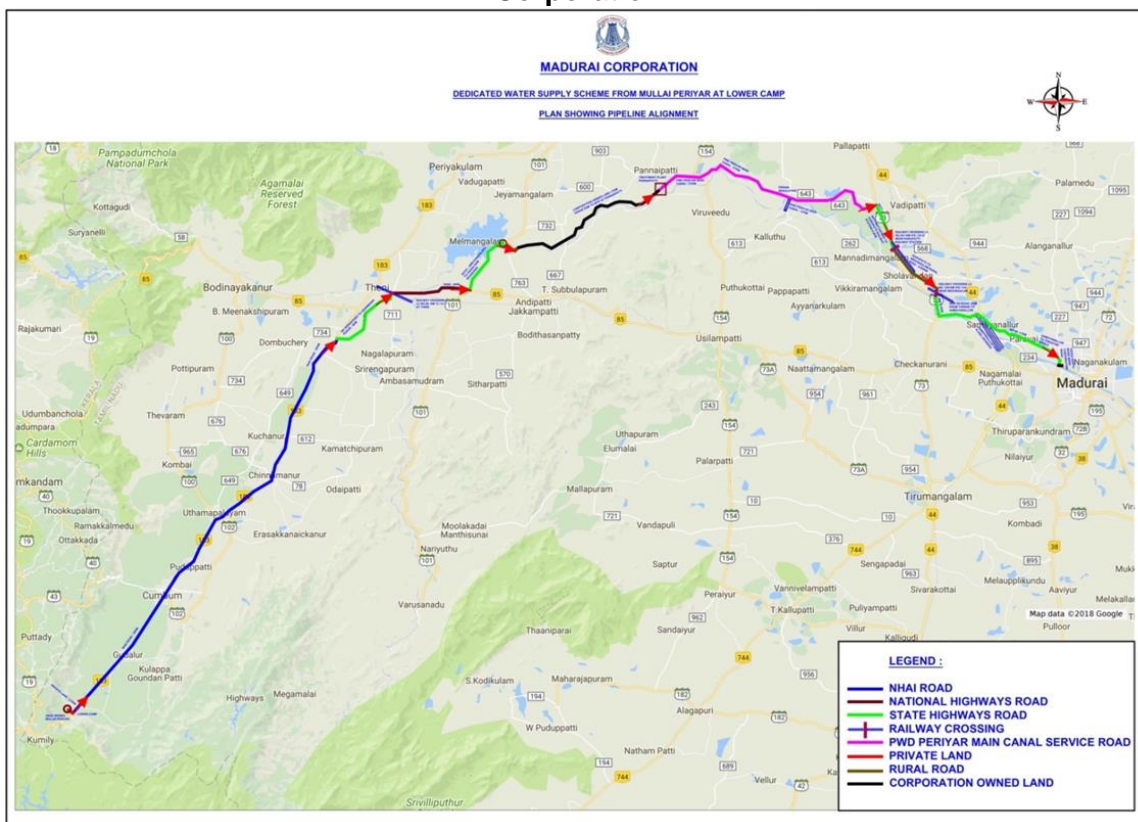

III. POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK

A. ADB Policy

76. ADB requires the consideration of environmental issues in all aspects of ADB's operations, and the requirements for environmental assessment are described in ADB SPS, 2009. This states that ADB requires environmental assessment of all ADB investments.

77. **Screening and categorization.** The nature of the environmental assessment required for a project depends on the significance of its environmental impacts, which related to the type and location of the project: the sensitivity, scale, nature, magnitude of its potential impacts, and the availability of cost-effective mitigation measures. Projects are screened for their expected environmental impacts, and are assigned to one of the following four categories:

- (i) **Category A.** A proposed project is classified as category 'A' if it is likely to have significant adverse environmental impacts that are irreversible, diverse, or unprecedented. These impacts may affect an area larger than the sites or facilities subject to physical works. An EIA is required;
- (ii) **Category B.** A proposed project is classified as category 'B' if its potential adverse environmental impacts are less adverse than those of category 'A' projects. These impacts are site-specific, few if any of them are irreversible, and in most cases mitigation measures can be designed more readily than for category 'A' projects. An IEE is required;
- (iii) **Category C.** A proposed project is classified as category 'C' if it is likely to have minimal or no adverse environmental impacts. No environmental assessment is required although environmental implications need to be reviewed; and
- (iv) **Category FI.** A proposed project is classified as category 'FI' if it involves investment of bank funds to or through a Financial Intermediary.

78. **Environmental Management Plan.** An EMP, which addresses the potential impacts and risks identified by the environmental assessment, shall be prepared. The level of detail and complexity of the EMP and the priority of the identified measures and actions will be commensurate with the project's impact and risks.

79. **Public disclosure.** ADB will post the safeguard documents on its website as well as disclose relevant information in accessible manner in local communities:

- (i) for environmental category A projects, draft EIA report at least 120 days before Board consideration;
- (ii) final or updated IEE upon receipt; and
- (iii) environmental monitoring reports submitted by the implementing agency during project implementation upon receipt.

B. National Environmental Laws

80. **Environmental Assessment.** The Government of India EIA Notification of 2006 (replacing the EIA Notification of 1994), set out the requirements for Environmental Assessment in India. This states that environmental clearance is required for specified activities/projects, and this must be obtain before any construction work or land preparation (except land acquisition) may commence. Projects are categorized as A or B depending on the scale of the project and the nature of its impacts.

81. **Category A** projects requires environmental clearance from the central Ministry of Environment, Forests and Climate Change (MoEFCC). The proponent is required to provide preliminary details of the project in the prescribed manner with all requisite details, after which an Expert Appraisal Committee (EAC) of the MoEFCC prepares comprehensive terms of reference (TOR) for the EIA study. On completion of the study and review of the report by the EAC, MoEF&CC considers the recommendation of the EAC and provides the environmental clearance if appropriate.

82. **Category B** projects require environmental clearance from the State Environment Impact Assessment Authority (SEIAA). The State level EAC categorizes the project as either B1 (requiring EIA study) or B2 (no EIA study) and prepares TOR for B1 projects within 60 days. On completion of the study and review of the report by the EAC, the SEIAA issues the environmental clearance based on the EAC recommendation. The Notification also provides that any project or activity classified as category B will be treated as category A if it is located in whole or in part within 10 km from the boundary of protected areas, notified areas or inter-state or international boundaries.

83. None of the components of this water supply scheme subproject falls under the ambit of the EIA Notification 2006, and, therefore EIA Study or environmental clearance is not required for the subproject.

84. **Applicable environmental regulations.** Besides EIA Notification 2006, there are various other acts, rules, policies and regulations currently in force in India that deal with environmental issues that could apply to infrastructure development. The specific regulatory compliance requirements of the subproject are shown in Table 20.

Table 21: Applicable Environmental Regulations

Law	Description	Requirement
Water (Prevention and Control of Pollution) Act of 1974, Rules of 1975, and amendments	An Act enacted to provide for the prevention and control of water pollution and the maintaining or restoring of wholesomeness of water. Control of water pollution is achieved through administering conditions imposed in consent issued under to this Act. All pollution potential activities will require Consent to Establish (CTE) from Tamil Nadu Pollution Control Board (TNPCB) before starting implementation and Consent to Operate (CTO) before commissioning.	Construction of proposed water-to-energy (WTP) (125 MLD) requires CTE and CTO from TNPCB before starting construction and before commissioning of WTP respectively. Application has to be submitted online at http://tnocmms.nic.in/OCMMS/
Environment (Protection) Act, 1986 and CPCB Environmental Standards.	Emissions and discharges from the facilities to be created or refurbished or augmented shall comply with the notified standards	To comply with applicable notified standards
Noise Pollution (Regulation and Control) Rules, 2000 amended up to 2010.	Rule 3 of the Act specifies ambient air quality standards in respect of noise for different areas/zones.	To comply with the noise standards.
Air (Prevention and Control of Pollution)	Applicable for equipment and machinery's potential to emit air pollution (including but	Generators will require CTE and CTO from TNPCB and has to

Law	Description	Requirement
Act, 1981, amended 1987 and its Rules, 1982.	not limited to diesel generators and vehicles); <ul style="list-style-type: none"> CTE and CTO from TNPCB; Compliance to conditions and emissions standards stipulated in the CTE and CTO. 	comply with applicable emission standards as well
Solid Wastes Management Rules, 2016	Rules to manage municipal solid waste generated; provides rules for segregation, storage, collection, processing and disposal.	Solid waste generated at proposed facilities shall be managed and disposed in accordance with the Solid Wastes Management (SWM) Rules
Construction and Demolition Waste Management Rules, 2016	Rules to manage construction and to waste resulting from construction, remodeling, repair and demolition of any civil structure. Rules define C and D waste as waste comprising of building materials, debris resulting from construction, re-modeling, repair and demolition of any civil structure.	Construction and demolition waste generated from the project construction shall be managed and disposed as per the rules
Labor Laws	The contractor shall not make employment decisions based upon personal characteristics unrelated to job requirements. The contractor shall base the employment relationship upon equal opportunity and fair treatment and shall not discriminate with respect to aspects of the employment relationship, including recruitment and hiring, compensation (including wages and benefits), working conditions and terms of employment or retirement, and discipline. The contractor shall provide equal wages and benefits to men and women for work of equal value or type.	Appendix 2 provides applicable labor laws including amendments issued from time to time applicable to establishments engaged in construction of civil works, which will need to be followed by the project.
Manufacture, Storage and Import of Hazardous Chemicals Rules, 1989 (MSIHC Rules, 1989)	Never expose cylinders to heat, always keep the valve protection cap in place, except when the cylinder is being used, never lift a cylinder by its valve protection cap, Cylinders must be kept upright at all times when moved or stored. Secure chlorine containers with chains, chocks or appropriate equipment.	To comply with the storage and import of hazardous chemicals rules.
Explosives Rules, 2008	NOC for Controlled Blasting for excavation – shall obtain approval from District Collector	Shall comply all directions laid down in Explosives Rules, 2008

85. **Clearances / permissions to be obtain by contractor.** Following table shows the list of clearances/permissions required for project construction. This list indicative and the contractor should ascertain the requirements prior to start of the construction and obtain all necessary clearances/permission prior to start of construction.

Table 22: Clearances and Permissions Required for Construction

S. No	Construction Activity	Statutory Authority	Statute under which Clearances Required	Implementation	Supervision
1	Tree Cutting	Department of Forest and District Collector/ DRO	Clearances from the authorities as per the Tamil Nadu Timber Transit Rules, 1968 or latest.	PIU	PIU
2.	Construction of WTP	TNPCB	Consent to establish and consent to operate under Water Act, 1974 and Air act 1981	Contractor & PIU	PIU
3	Hot mix plants, Crushers and Batching plants	TNPCB	Consent to establish and consent to operate under Air Act, 1981	Contractor	PIU
4	Discharges from construction activities	TNPCB	Consent to establish and consent to operate under Water Act, 1974	Contractor	PIU
5	Storage, handling and transport of hazardous materials	TNPCB	Hazardous Wastes (Management and Handling) Rules, 1989 Manufacturing, Storage and Import of Hazardous Chemicals Rules, 1989	Contractor	PIU
6	Sand mining, quarries and borrow areas	Department of Geology and mining, GOTN	Tamil Nadu Minor Mineral Concession Rules, 1959 (corrected up to 31 March 2001)	Contractor	PIU
7	New quarries and borrow areas	MOEF&CC	Environmental clearance under EIA Notification 2006	Contractor	PIU
8	Groundwater extraction	Public Works Department	(Groundwater) Tamil Nadu Groundwater Development and Management Act 2000	Contractor	PIU
9	Disposal of bituminous wastes	Tamil Nadu State Pollution Control Board	Hazardous Wastes (Management and Handling) Rules. 1989	Contractor	PIU
7	Temporary traffic diversion measures	-	MoRTH 112 SP 55of IRC codes	Contractor	PIU
8	Water source (With drawl)	PWD	Permission obtained attached as Appendix 9	PIU	PIU
9	Pipe carrying bridge	PWD	Permission Obtained	PIU	PIU
10	NOC for Controlled Blasting for excavation	District Collector, Madurai	Explosives Rules, 2008	Contractor	PIU

S. No	Construction Activity	Statutory Authority	Statute under which Clearance is Required	Implementation	Supervision
-------	-----------------------	---------------------	---	----------------	-------------

DRO - District Revenue Office, EIA = environmental impact assessment, PIU = program implementation unit, PMU = program management unit, PWD = Public Works Department, TNPCB = Tamil Nadu Pollution Control Board.

86. **ADB SPS Requirements.** During the design, construction, and operation of the project the program management unit (PMU) and program implementation units (PIUs) will apply pollution prevention and control technologies and practices consistent with international good practice, as reflected in internationally recognized standards such as the World Bank Group's Environment, Health and Safety Guidelines. These standards contain performance levels and measures that are normally acceptable and applicable to projects. When Government of India regulations differ from these levels and measures, the PMU and PIU in Madurai Municipal Corporation will achieve whichever is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, the PMU and PIU Madurai Municipal Corporation will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS, 2009. [The SPS 2009 also requires that ADB-financed sub-projects to comply with host country regulations.](#)

Table 23: Applicable Ambient Air Quality Standards for India Projects

Parameter	Location ^a	National Ambient Air Quality Standards ^b	WHO Air Quality Guidelines (µg/m ³)		Applicable Per ADB SPS ^c (µg/m ³)
			Global Update ^d 2005	Second Edition ^e 2000	
Particulate Matter PM ₁₀ (µg/m ³)	Industrial Residential, Rural and Other Areas	60 (Annual) 100 (24-hr)	20 (Annual) 50 (24-hr)	-	20 (Annual) 50 (24-hr)
	Sensitive Area	60 (Annual) 100 (24-hr)	20 (Annual) 50 (24-hr)	-	20 (Annual) 50 (24-hr)
Particulate Matter PM ₂₅ (µg/m ³)	Industrial Residential, Rural and Other Areas	40 (Annual) 60 (24-hr)	10 (Annual) 25 (24-hr)	-	10 (Annual) 25 (24-hr)
	Sensitive Area	40 (Annual) 60 (24-hr)	10 (Annual) 25 (24-hr)	-	10 (Annual) 25 (24-hr)
Sulfur Dioxide SO ₂ (µg/m ³)	Industrial Residential, Rural and Other Areas	50 (Annual) 80 (24-hr)	20 (24-hr) 500 (10-min)	-	20 (Annual) 800 (24-hr) 500 (10-min)
	Sensitive Area	20 (Annual) 80 (24-hr)	20 (24-hr) 500 (10-min)	-	20 (Annual) 20 (24-hr) 500 (10-min)
Nitrogen Dioxide NO ₂ (µg/m ³)	Industrial Residential, Rural and Other Areas	40 (Annual) 80 (24-hr)	40 (Annual) 200 (1-hr)	-	40 (Annual) 80 (24-hr) 200 (1-hr)
	Sensitive Area	30 (Annual) 80 (24-hr)	40 (Annual) 200 (1-hr)	-	30 (Annual) 80 (24-hr) 200 (1-hr)
Carbon Monoxide CO (µg/m ³)	Industrial Residential, Rural and Other Areas	2,000 (8-hr) 4,000 (1-hr)	-	10,000 (8-hr) 100,000 (15-min)	2,000 (8-hr) 4,000 (1-hr) 100,000 (15-min)
	Sensitive Area	2,000 (8-hr) 4,000 (1-hr)	-	10,000 (8-hr) 100,000 (15-min)	2,000 (8-hr) 4,000 (1-hr) 100,000 (15-min)

Parameter	Location ^a	National Ambient Air Quality Standards ^b	WHO Air Quality Guidelines ($\mu\text{g}/\text{m}^3$)		Applicable Per ADB SPS ^c ($\mu\text{g}/\text{m}^3$)
			Global Update ^d 2005	Second Edition ^e 2000	
Ozone (O_3) ($\mu\text{g}/\text{m}^3$)	Industrial Residential, Rural and Other Areas	100 (8-hr) 180 (1-hr)	100 (8-hr)	-	100 (8-hr) 180 (1-hr)
	Sensitive Area	100 (8-hr) 180 (1-hr)	100 (8-hr)	-	100 (8-hr) 180 (1-hr)
Lead (Pb) ($\mu\text{g}/\text{m}^3$)	Industrial, Residential, Rural and Other Areas	0.5 (Annual) 1.0 (24-hr)	-	0.5 (Annual)	0.5 (Annual) 1.0 (24-hr)
	Sensitive Area	0.5 (Annual) 1.0 (24-hr)	-	0.5 (Annual)	0.5 (Annual) 1.0 (24-hr)
Ammonia (NH_3) ($\mu\text{g}/\text{m}^3$)	Industrial Residential, Rural and Other Areas	100 (Annual) 400 (24-hr)	-		100 (Annual) 400 (24-hr)
	Sensitive Area	100 (Annual) 400 (24-hr)	-	-	100 (Annual) 400 (24-hr)
Benzene (C_6H_6) ($\mu\text{g}/\text{m}^3$)	Industrial Residential, Rural and Other Areas	5 (Annual)	-	-	5 (Annual)
	Sensitive Area	5 (Annual)	-	-	5 (Annual)
Benzo(o) pyrene (BaP) (ng/m^3)	Industrial Residential, Rural and Other Areas	1 (Annual)	-	-	1 (Annual)
	Sensitive Area	1 (Annual)	-	-	1 (Annual)
Arsenic (As) (ng/m^3)	Industrial Residential, Rural and Other Areas	6 (Annual)	-	-	6 (Annual)
	Sensitive Area	6 (Annual)	-	-	6 (Annual)
Nickel (Ni) (ng/m^3)	Industrial Residential, Rural and Other Areas	20 (Annual)	-	-	20 (Annual)
	Sensitive Area	20 (Annual)	-	-	20 (Annual)

a Sensitive area refers to such areas notified by the India Central Government.

b http://cpcb.nic.in/uploads/National_Ambient_Air_Quality_Standards.pdf

c. World Health Organization. 2006. Air quality guidelines for particulate matter, ozone, nitrogen dioxide and sulfur dioxide. *Global update 2005*.

d World Health Organization. 2000. Air Quality Guidelines for Europe Second Edition.

Table 24: Applicable Ambient Noise Level Standards for India Projects

Receptor/ Source	Noise Level Standards ^a (dBA)		WHO Guidelines Value For Noise Levels Measured Out of Doors ^b (One Hour LA_{eq} in dBA)		Applicable Per ADB SPS ^c (dBA)	
	Day	Night	07:00 – 22:00	22:00 – 07:00	Day time	Night time
Industrial area	75	70	70	70	70	70
Commercial area	65	55			65	55
Residential Area	55	45	55	45	55	45

Silent Zone	50	40			50	40
-------------	----	----	--	--	----	----

a Noise Pollution (Regulation and Control) Rules, 2002 as amended up to 2010

(<http://cpcb.nic.in/displaypdf.php?id=Tm9pc2UtU3RhbmRhcmRzL25vaXNlX3J1bGVzXzlwMDAucGRm>)

b World Health Organization. 1999. Guidelines for Community Noise.

Table 25: Applicable Drinking Water Quality Standards^a for India Projects

Group	National Standards for Drinking Water ^b			WHO Guidelines for Drinking-Water Quality, 4th Edition, 2011 ^c	Applicable Per ADB SPS ^{d,e}
	Parameter	Unit	Max. Concentration Limit		
Physical	Turbidity	NTU	1 (5)	-	1 (5)
	pH		6.5 – 8.5	none	6.5 – 8.5
	Color	Hazen units	5 (15)	none	5 (15)
	Taste and Odor		Agreeable	-	Agreeable
	TDS	mg/l	500 (2,000)	-	500 (2,000)
	Iron	mg/l	0.3	-	0.3
	Manganese	mg/l	0.1 (0.3)	-	0.1 (0.3)
	Arsenic	mg/l	0.01 (0.05)	0.01	0.01
	Cadmium	mg/l	0.003	0.003	0.003
	Chromium	mg/l	0.05	0.05	0.05
	Cyanide	mg/l	0.05	none	0.05
	Fluoride	mg/l	1 (1.5)	1.5	1 (1.5)
	Lead	mg/l	0.01	0.01	0.01
	Ammonia	mg/l	0.5	none established	0.5
Chemical	Chloride	mg/l	250 (1,000)	none established	250 (1,000)
	Barium	mg/l	0.7	none	0.7
	Sulphate	mg/l	200 (400)	none	200 (400)
	Nitrate	mg/l	45	50	45
	Copper	mg/l	0.05 (1.5)	2	0.05 (1.5)
	Total Hardness	mg/l	200 (600)	-	200 (600)
	Calcium	mg/l	75 (200)	-	75 (200)
	Zinc	mg/l	5 (15)	none established	5 (15)
	Mercury	mg/l	0.001	0.006	0.001
	Aluminum	mg/l	0.1 (0.3)	none established	0.1 (0.3)
	Anionic detergents	mg/l	0.2 (1.0)	none	0.2 (1.0)
	Phenolic compounds	mg/l	0.001(0.002)	none	0.001(0.002)
	Residual Chlorine	mg/l	0.2	5	0.2
Microbial indicator	E-coli	MPN/100ml	Must not be detectable in any 100 ml sample	Must not be detectable in any 100 ml sample	Must not be detectable in any 100 ml sample
	Total Coliform	MPN/100ml			

a <http://cgwb.gov.in/Documents/WQ-standards.pdf>

b Bureau of India Standard 10500: 2012 (Indian Standard, Drinking Water — Specification (Second Revision)).

c Health-based guideline values

d Figures in parenthesis are maximum limits allowed in the absence of alternate source.

Table 26: General Standards for Discharge of Environmental Pollutants^a
Part- A: Effluents (SCHEDULE-V)

Sl. no	Parameter	Inland surface water	Public sewers	Land for irrigation	Marine/ coastal areas
1	Suspended solids mg/l, max.	100	600	200	(a) For process waste water (b) For cooling water effluent 10 per cent above total suspended matter of influent
2	Particle size of suspended solids	shall pass 850 micron IS Sieve	-	-	(a) Floatable solids, solid s max. 3 mm (b) Settleable solids, max 856 microns
3	pH value	5.5 to 9.0	5.5 to 9.0	5.5 to 9.0	5.5 to 9.0
4	Temperature	shall not exceed 5°C above the receiving water temperature	-	-	shall not exceed 5°C above the receiving water temperature
5	Oil and grease, mg/l max	10	20	10	20
6	Total residual chlorine, mg/l max	1	-	-	1
7	Ammonical nitrogen (N), mg/l, max	50	50	-	50
8	Total kjeldahl nitrogen (N) mg/l, max	100	-	-	100
9	Free ammonia (NH ₃), mg/l, max.	5	-	-	5
10	Biochemical Oxygen Demand (3 days at 27°C), mg/l, max	30	350	100	100
11	Chemical Oxygen Demand, mg/l, max	250	-	-	250
12	Arsenic (As) mg/l, max.	0.2	0.2	0.2	0.2
13	Mercury (Hg), mg/l, max.	0.01	0.01	-	0.01
14	Lead (Pb) mg/l, max	0.1	1	-	2
15	Cadmium (Cd) mg/l, max	2	1	-	2
16	Hexavalent chromium (Cr +6), mg/l, max.	0.1	2	-	1
17	Total Chromium (Cr) mg/l, max.	2	2	-	2
18	Copper (Cu) mg/l, max.	3	3	-	3

Sl. no	Parameter	Inland surface water	Public sewers	Land for irrigation	Marine/ coastal areas
19	Zinc (Zn) mg/l, max	5	15	-	15
20	Selenium (Se) mg/l, max	0.05	0.05	-	0.05
21	Nickel (Ni) mg/l, max.	3	3	-	5
22	Cyanide (CN) mg/l, max	0.2	2	0.2	0.2
23	Fluoride (F) mg/l, max.	2	15	-	15
24	Dissolved phosphates (P), mg/l, max	5	-	-	-
25	Sulphide (S) mg/l, max.	2	-	-	5
26	Phenolic compounds (C ₆ H ₅ OH) mg/l, max.	1	5	-	5
27	Radioactive materials:				
	(a) Alpha emitters micro curie mg/l, max.	10 ⁻⁷	10 ⁻⁷	10 ⁻⁸	10 ⁻⁷
	(b) Beta emitters micro curie mg/l	10 ⁻⁶	10 ⁻⁶	10 ⁻⁷	10 ⁻⁶
28	Bio-assay test	90% survival of fish after 96 hours in 100% effluent	90% survival of fish after 96 hours in 100% effluent	90% survival of fish after 96 hours in 100% effluent	90% survival of fish after 96 hours in 100% effluent
29	Manganese	2 mg/l	2 mg/l	-	2 mg/l
30	Iron (Fe)	3mg/l	3mg/l	-	3mg/l
31	Vanadium (V)	0.2mg/l	0.2mg/l	-	0.2mg/l
32	Nitrate Nitrogen	10 mg/l	-	-	20 mg/l

^a <http://cpcb.nic.in/industry-effluent-standards/>

IV. DESCRIPTION OF THE ENVIRONMENT

A. Methodology used for Baseline Study

87. **Data collection and stakeholder consultations.** Data for this study has been primarily collected through comprehensive literature survey, discussion with stakeholder agencies and field visits to the proposed subproject sites.

88. The literature survey broadly covered the following:

- (i) Project details, reports, maps, and other documents prepared by Madurai Municipal Corporation;
- (ii) Discussions with technical experts, publics and other relevant government agency.
- (iii) Secondary data from previous project reports and published articles; and
- (iv) Literature on land use, soil, geology, hydrology, climate, socioeconomic profiles, and other planning documents collected from Government agencies and websites.

89. In order to predict the anticipated impacts due to an infrastructure project implementation/ construction, it is necessary to obtain baseline information of the environment, as it exists, which would serve as a datum. The interaction of baseline environment and the anticipated impacts are the basis for the preparation of the EMP. This chapter includes existing scenario for various environmental components of the study area. The baseline environmental quality status is

assessed through field studies in the study area for various components of environment, viz, air, noise, water, land, biological and socio-economic. Baseline data collection for each of the environmental components is based on the location of proposed project and anticipated distance of the significant impact. The study area is defined for each of the environmental components independently taking into consideration the vulnerability of the environmental component with respect to the activity of the proposed project. Majority of data on water quality, vegetation, air and noise quality was collected during field studies.

90. **Ocular inspection.** Several visits to the project sites were made during IEE preparation period in 2018 to assess the existing environment (physical, biological, and socio-economic) and gather information with regard to the proposed sites and scale of the proposed project. A separate socioeconomic study was conducted to determine the demographic information, existing service levels, stakeholder needs and priorities.

B. Physical Environmental Component

91. Considering the environmental setting of the project, project activities and their interaction, environmental regulations and standards, the following Environmental attributes have been included for the IEE. The study was conducted at 8 locations in project alignment area.

- (i) Site-specific micrometeorological data for the parameters of Windspeed & direction, Temperature, Humidity, Cloud Cover and Rainfall;
- (ii) Ambient Air Quality at 8 locations for the parameters: PM₁₀, PM_{2.5}, SO₂, NO₂;
- (iii) Noise Level Measurements at 8 Locations for both Leq-Day and Leq-Night values.
- (iv) Water Quality: Surface Water at 2 Locations and Groundwater at 6 Locations for IS: 10500 Norms;
- (v) Soil Quality at 8 Locations for Textural & Physical Parameters, Nutrients, etc.;
- (vi) Present & Post-project Land Use Pattern based on Satellite Imagery;
- (vii) Biotic Attributes: Flora & Fauna -Core zone & Buffer zone-Diversity Index; and
- (viii) Socio-Economic Profile (2011 Census): Total Population, Household Size, Age, Gender Composition, SC/ST, Literacy Level, Occupational Structure, etc.

92. **Micrometeorology.** As a part of the study, the micrometeorology and microclimatic parameters were recorded by using a weather monitoring station. Information related to wind velocity; wind direction, ambient temperature and relative humidity were recorded. From the observation, the maximum temperature of 36.5°C was recorded for the month of April 2017 and minimum temperature of 25.7°C was recorded for the month of June 2017. The predominant wind direction was towards South West Direction during the study period. Using the data, suitable wind rose diagram are also prepared and depicted in the Figures 6, 7 and 8 respectively. The maximum wind velocity was observed 13 m/s during the period of June 2017, and the minimum wind velocity was observed 1 m/s during the period of April and May 2017. Relative Humidity ranges from 60 % to 96 %. The maximum humidity was observed during the month of June 2017 and the minimum humidity was observed in April 2017. The outcome of the monitoring is given in the Table 22, 23 and 24 respectively.

Table 27: Meteorological Data for the Month of April 2017

Date	Temperature (°C)	Wind Direction	Wind Velocity (m/s)	Relative Humidity
01 April 2017	33	130	2	72
02 April 2017	33.4	135	3	79
03 April 2017	35	140	4	78

Date	Temperature (°C)	Wind Direction	Wind Velocity (m/s)	Relative Humidity
04 April 2017	34.8	145	3	67
05 April 2017	36.1	150	2	61
06 April 2017	36.5	135	3	60
07 April 2017	35.4	130	4	74
08 April 2017	35.5	125	3	70
09 April 2017	34.3	55	3	72
10 April 2017	35	60	3	71
11 April 2017	35	130	3	64
12 April 2017	34.4	135	2	73
13 April 2017	29	145	3	75
14 April 2017	28.3	150	2	79
15 April 2017	30.5	140	2	91
16 April 2017	29.3	130	1	88
17 April 2017	30.5	145	2	78
18 April 2017	30.5	130	2	71
19 April 2017	31.3	135	1	70
20 April 2017	32.3	125	2	76
21 April 2017	31.7	130	2	69
22 April 2017	32.3	135	3	71
23 April 2017	33.5	145	3	79
24 April 2017	31.9	140	3	71
25 April 2017	33.4	65	2	83
26 April 2017	31.3	60	2	74
27 April 2017	30.8	55	1	87
28 April 2017	31.1	60	3	84
29 April 2017	32.6	50	3	84
30 April 2017	33	55	3	71

Source: Primary Data.

Table 28: Meteorological data for the Month of May 2017

Date	Temperature (°C)	Wind Direction	Wind Velocity (m/s)	Relative Humidity
01 May 2017	33.4	130	3	70
02 May 2017	33.8	135	3	79
03 May 2017	33.3	140	4	77
04 May 2017	32	135	2	84
05 May 2017	31.1	125	2	74
06 May 2017	31.5	145	2	78
07 May 2017	30.7	140	2	75

Date	Temperature (°C)	Wind Direction	Wind Velocity (m/s)	Relative Humidity
08 May 2017	31.7	290	3	75
09 May 2017	33.4	310	3	75
10 May 2017	33.1	320	3	77
11 May 2017	31.2	300	2	76
12 May 2017	31.5	305	3	76
13 May 2017	32	315	1	83
14 May 2017	28.5	310	1	80
15 May 2017	29.6	325	2	82
16 May 2017	31.2	295	2	78
17 May 2017	30.1	300	2	89
18 May 2017	29.6	305	4	90
19 May 2017	31.2	320	2	76
20 May 2017	32	310	4	85
21 May 2017	33	325	6	81
22 May 2017	32	315	5	84
23 May 2017	32	310	5	79
24 May 2017	31.1	325	6	82
25 May 2017	33.3	320	6	80
26 May 2017	33	295	6	77
27 May 2017	32.2	295	6	79
28 May 2017	29.8	300	5	88
29 May 2017	28.2	295	3	84
30 May 2017	32.4	300	5	71
31 May 2017	32.2	310	4	81

Source: Primary Data.

Table 29: Meteorological Data for the Month of June 2017

Date	Temperature (°C)	Wind Direction	Wind Velocity (m/s)	Relative Humidity
01 June 2017	32.5	225	5	86
02 June 2017	31	220	4	82
03 June 2017	28.6	250	3	79
04 June 2017	30.5	245	3	78
05 June 2017	29.4	230	2	96
06 June 2017	30.6	235	4	81

Date	Temperature (°C)	Wind Direction	Wind Velocity (m/s)	Relative Humidity
07 June 2017	32	220	5	68
08 June 2017	31.2	235	7	79
09 June 2017	31.2	250	6	80
10 June 2017	30.7	245	6	85
11 June 2017	32	230	5	88
12 June 2017	31.4	215	6	86
13 June 2017	28.9	230	5	86
14 June 2017	29.7	250	6	91
15 June 2017	27.2	225	13	83
16 June 2017	29	235	6	88
17 June 2017	28.3	230	6	81
18 June 2017	27.2	250	7	84
19 June 2017	27.4	215	7	86
20 June 2017	26.4	230	7	91
21 June 2017	28.3	205	8	93
22 June 2017	25.7	220	8	85
23 June 2017	28.7	240	9	86
24 June 2017	28.2	225	10	86
25 June 2017	30.3	225	9	83
26 June 2017	30.6	220	9	86
27 June 2017	27.4	225	8	83
28 June 2017	29	220	8	83
29 June 2017	30.4	235	7	83
30 June 2017	32	225	5	88

Source: Primary Data.

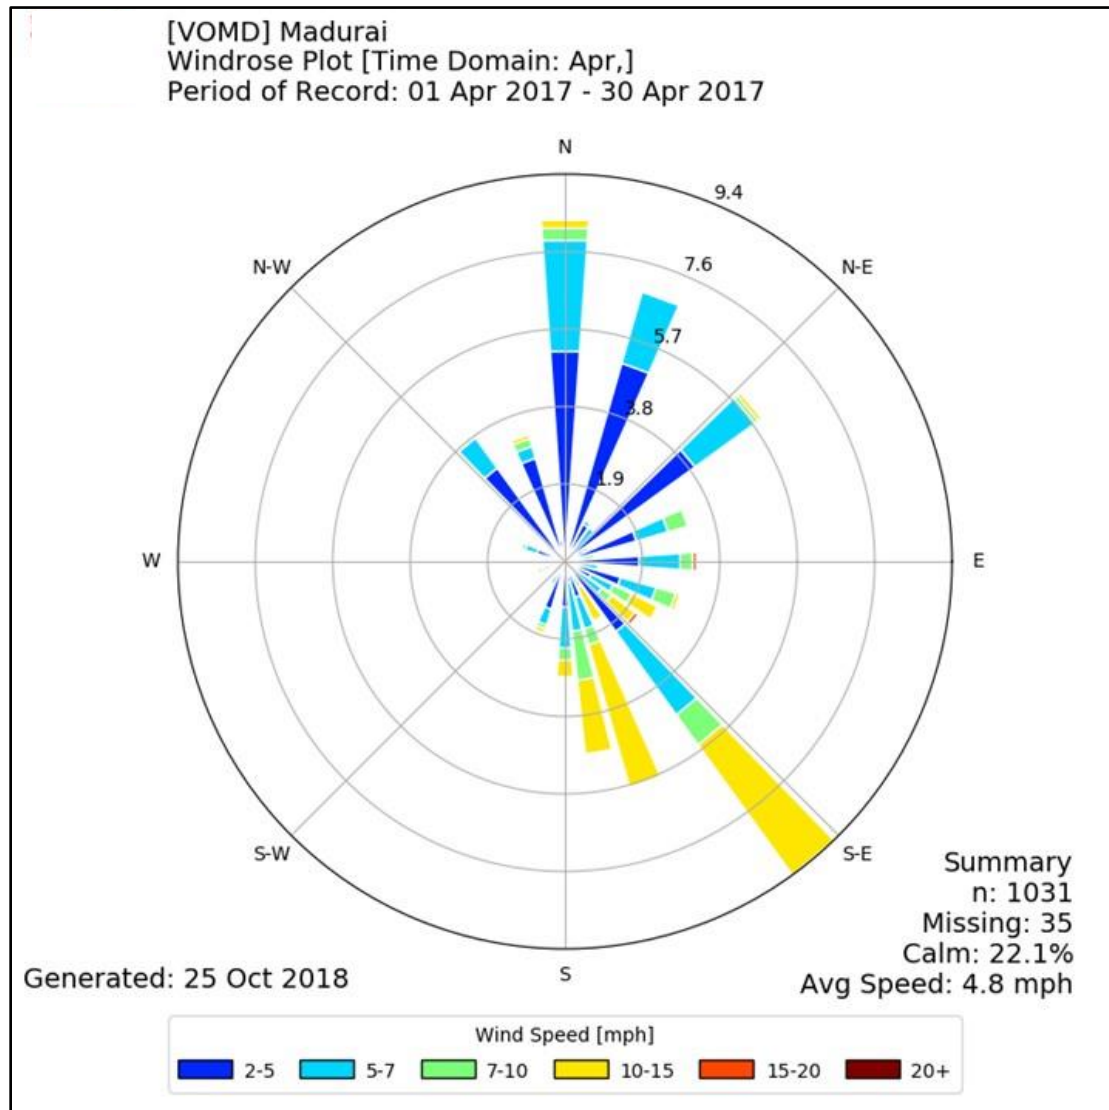
Figure 8: Wind Rose diagram for April 2017

Figure 9: Wind Rose diagram for May 2017**Figure 10: Wind Rose diagram for June 2017**

93. The secondary data collected from IMD includes temperature, relative humidity, rainfall and wind speed. The monthly maximum, minimum and average values are presented in Table 22. All these parameters are recorded twice a day viz at 8:30 a.m. and 5:30 p.m.

94. **Temperature.** The winter season starts from December and continues until the end of February. December and January are the coolest month with the mean daily maximum temperature in winter season around 40.2°C (in the month of May 2013) and the mean daily minimum temperature at 18.7°C (in the month of January 2009). Both the night and day temperatures increase rapidly during the onset of the pre-monsoon season from March to May.

95. **Relative humidity.** The air is generally humid in this region during the post monsoon season. The relative humidity at 0830 hr was observed to be 98%. Similarly, at 1730 hr, the relative humidity was observed to be of 100%. In general, the weather during other seasons was observed to be dry.

96. **Rainfall.** The monsoon sets in the month of June and continues up to September and sometime extends up to mid-October. The maximum amount of rainfall (256.3 mm) occurs in the month of November.

Table 30: Meteorological Data (Madurai Station, 2009–2013)

Year	Jan	Feb	Mar	Apr	May	June	July	Aug	Sept	Oct	Nov	Dec
I.ELEMENT: Monthly Mean Maximum Temperature (DEG C)												
2009	30.2	33.4	35.2	36.1	34.5	32.5	30.3	32	31.9	32.2	29.9	29.2
2010	30.6	33.3	36.2	37.3	35.3	32.9	31.5	30.9	31.9	31.7	29.1	28.9
2011	30.8	32.3	35.3	36.2	37.7	37.6	36.7	36.0	36.1	33.7	30.4	30.3
2012	30.9	33.1	36.7	37.8	38.6	39.2	39.1	38.0	37.5	33.7	32.7	32.8
2013	33.4	33.7	36.3	40.0	40.2	37.5	38.1	36.9	35.9	36.2	32.7	31.4
II. ELEMENT: Monthly Highest Maximum Temperature (DEG C)												
2009	32.5	37	37.7	38	37.4	37.2	35.6	33.9	35.1	34.2	33.1	32
2010	32.2	36	37.7	39.5	37.8	37	35	33.8	34.2	33.8	32.6	31.6
2011	32.0	35.0	36.8	38.4	39.4	40.0	40.0	38.4	37.0	36.4	32.8	31.6
2012	32.2	35.4	38.8	40.5	41.1	42.0	41.5	40.5	40.1	38.6	35.6	34.2
2013	34.6	36.5	39.3	41.9	42.0	40.2	40.8	39.0	38.6	39.2	34.6	34.4
III. ELEMENT: Monthly Mean Minimum Temperature (DEG C)												
2009	18.7	19.9	22.3	24.3	23.8	23.4	22.3	22.7	22.9	22.3	22.1	20.9
2010	20.3	20.8	23	25.1	25	23.5	22.6	22.4	22.6	22.5	21.7	20
2011	21.1	21.4	22.9	25.2	25.7	26.0	25.6	25.2	25.0	24.0	22.5	21.5

Year	Jan	Feb	Mar	Apr	May	June	July	Aug	Sept	Oct	Nov	Dec
2012	20.3	21.5	24.5	25.7	26.4	26.4	26.2	25.4	25.3	23.9	23.0	22.4
2013	21.5	22.0	23.7	26.3	26.6	27.0	27.0	25.4	25.3	24.5	23.8	21.9
IV. ELEMENT: Monthly Lowest Minimum Temperature (DEG C)												
2009	16.1	17.8	19.7	22.6	21.4	21.2	21	21.6	21.6	20.2	19	17.8
2010	17.4	17.4	19.8	23	22	21.6	21.3	21.2	20.4	20.8	19	16.6
2011	16.6	16.0	20.2	23.0	22.0	23.8	22.0	23.7	23.0	22.2	18.5	17.0
2012	16.4	18.5	20.3	22.0	22.0	24.7	24.5	23.5	23.5	22.7	20.4	19.7
2013	19.0	17.0	19.1	24.0	25.1	25.2	26.0	22.6	23.6	22.0	21.6	19.4
V. ELEMENT: Monthly Mean R.H. at 0830 HRS IST (%)												
2009	78	68	71	73	79	77	82	82	81	75	86	81
2010	80	77	71	73	78	80	81	83	80	82	89	86
2011	75	72	70	71	65	61	61	64	62	76	78	77
2012	75	69	68	71	64	56	58	63	63	74	73	70
2013	70	72	69	65	57	59	54	63	67	66	74	74
VI. ELEMENT: Monthly Highest R.H. at 0830 HRS IST (%)												
2009	88	88	87	85	88	93	92	96	92	94	96	93
2010	91	86	88	81	91	95	91	98	95	96	98	96
2011	85	88	87	92	83	87	70	87	75	96	96	91
2012	85	82	77	87	73	66	77	79	80	91	87	86
2013	77	95	87	75	70	68	62	80	90	93	90	91
VII. ELEMENT: Monthly Lowest R.H. at 0830 HRS IST (%)												
2009	68	50	48	61	59	64	69	75	66	49	64	72
2010	67	60	53	58	64	66	65	74	64	66	68	75
2011	64	54	59	57	51	49	52	52	54	61	58	64
2012	60	44	56	60	54	44	49	48	50	58	62	58
2013	62	51	51	52	49	49	45	45	49	49	61	62
VIII. ELEMENT: Monthly Mean R.H. at 1730 HRS IST (%)												
2009	35	23	27	37	55	61	67	63	67	51	68	57
2010	30	29	25	40	58	65	66	67	63	71	73	60
2011	56	48	37	49	45	45	49	52	52	66	69	64
2012	50	42	37	49	52	47	44	54	51	67	60	57
2013	47	46	43	41	44	50	46	55	54	54	61	54
IX. ELEMENT: Monthly Highest R.H. at 1730 HRS IST (%)												
2009	52	37	70	60	90	91	93	83	76	91	92	97
2010	71	40	45	65	85	90	95	85	74	96	95	98
2011	77	82	47	95	88	80	84	87	93	90	96	95

Year	Jan	Feb	Mar	Apr	May	June	July	Aug	Sept	Oct	Nov	Dec
2012	88	63	45	100	92	95	76	95	80	95	74	92
2013	87	72	92	75	65	63	62	95	88	92	89	80
X. ELEMENT: Monthly Lowest R.H. at 1730 HRS IST (%)												
2009	16	14	11	13	37	41	48	42	45	42	48	33
2010	26	15	10	21	44	47	51	46	49	45	52	37
2011	46	36	23	30	34	33	40	38	35	46	49	31
2012	33	19	24	36	40	35	33	33	38	38	47	42
2013	38	27	26	33	32	40	38	38	40	31	50	39
XI. ELEMENT: Monthly Total Rainfall (MM)												
2009	0	0	5.8	3.1	91	8.7	42.8	55.9	68.7	51.3	227	1.3
2010	0.1	0	0	17.7	57.8	31.9	14.8	60.1	30.8	132.2	256.3	34.7
2011	7.4	42.9	0.4	52.5	68.9	28.2	70.4	65.2	74.0	219.1	189.1	15.5
2012	13.9	Trace	0.4	111.1	61.8	18.3	15.8	91.2	57.1	187.9	9.6	3.5
2013	3.9	23.1	18.2	12.8	25.2	6.9	0.1	195.5	44.3	182.2	33.7	80.5
XII. ELEMENT: Monthly Mean Windspeed (KMPH)												
2009	3	4	4	6	9	10	11	9	9	5	3	4
2010	5	4	6	7	9	11	12	12	9	8	3	4
2011	5	6	5	4	4	4	4	4	4	3	5	5
2012	5	6	5	4	3	5	5	4	4	4	4	7
2013	12	6	6	5	4	6	6	4	4	3	4	5

Source: IMD.

97. **Ambient air quality.** The prime objective of the baseline air quality study was to assess the existing air quality of the project area. This will also be useful for assessing the conformity to standards of the ambient air quality during the construction and operation of the subproject. The study area represents mostly vacant/ barren land, agricultural and commercial cum residential landuse. This section describes the selection of sampling locations, methodology adopted for sampling, analytical techniques and frequency of sampling. The results of monitoring carried out for study period of April to June 2017 is presented in the following sections.

1. Selection of Sampling Locations

98. The ambient air quality has been assessed through a scientifically designed ambient air quality monitoring network based on the following considerations:

- (i) Meteorological conditions;
- (ii) Topography of the study area;
- (iii) Representative of regional background air quality for obtaining baseline status; and
- (iv) Representatives of likely impact areas.

99. Ambient Air Quality Monitoring (AAQM) stations were set up at eight locations with due consideration to the above-mentioned points. The AAQM locations are depicted in Figure 11.

2. Particulate Matter (PM₁₀ & PM_{2.5})

100. Based on the outcome of the analysis, the PM₁₀ and PM_{2.5} varied from 31 to 58 µg/m³ and 14 to 26 µg/m³ respectively. The observed values are below than the stipulated limits of AAQ standards. The results are presented in Tables 26 and 27 respectively.

Table 31: Ambient Air Quality Status (PM₁₀) – (April – June 2017)

Averaging Time: 24 hrs

Unit: µg/m³

Sl. No.	Sampling Station	Max	Min	Arithmetic Mean	Standard Deviation	98 th Percentile
AAQ1	Lower Camp	53	41	50	3.6	53
AAQ2	Gudalur	53	46	50	2.8	53
AAQ3	Cumbum	58	43	48	3.8	58
AAQ4	Chinnamanur	51	40	47	3.6	51
AAQ5	Theni	49	38	43	2.7	49
AAQ6	Pannaipatti	41	34	38	2.3	41
AAQ7	Samayanallur	43	31	39	3.7	43
AAQ8	Madurai	47	38	43	3.4	47

Note: PM₁₀ Permissible limit for industrial, Residential, Rural and other area is 100 µg/m³.

Table 32: Ambient Air Quality Status (PM_{2.5}) – (April – June 2017)

Averaging Time: 24 hrs

Unit: µg/m³

Sl. No.	Sampling Station	Max	Min	Arithmetic Mean	Standard Deviation	98 th Percentile
AAQ1	Lower Camp	26	21	24	1.6	26
AAQ2	Gudalur	25	18	23	1.8	25
AAQ3	Cumbum	23	18	22	1.5	23
AAQ4	Chinnamanur	25	18	21	1.8	25
AAQ5	Theni	21	16	19	1.2	21
AAQ6	Pannaipatti	20	15	17	1.4	20
AAQ7	Samayanallur	21	14	18	2.0	21
AAQ8	Madurai	22	16	19	1.8	22

Note: PM_{2.5} Permissible limit for industrial, Residential, Rural and other area is 60 µg/m³.

3. Sulphur Dioxide (SO₂)

101. From the observation, the recorded SO₂ concentration was in the range between 07 to 19 µg/m³. Maximum concentration was recorded in Chinnamanur (19 µg/m³) and minimum concentration was recorded in Pannaipatti (7 µg/m³). The results are shown in the Table 28.

Table 33: Ambient Air Quality Status (SO₂) - (April – June 2017)

Averaging time: 24 hrs.

Unit: µg/m³

Sl. No.	Sampling Station	Max	Min	Arithmetic Mean	Standard Deviation	98 th Percentile
AAQ1	Lower Camp	18	13	15	1.6	18
AAQ2	Gudalur	13	08	11	1.6	13
AAQ3	Cumbum	10	07	9.0	1.0	10
AAQ4	Chinnamanur	19	09	12	2.3	19
AAQ5	Theni	15	11	13	1.4	15
AAQ6	Pannaipatti	12	07	10	1.6	12
AAQ7	Samayanallur	17	12	14	1.7	17
AAQ8	Madurai	16	10	13	1.6	16

Note: Permissible limit of SO₂ for Industrial, Residential, Rural and other area is 80 µg/m³.**4. Oxides of Nitrogen (NO₂)**

102. The Nitrogen dioxide concentration in the subproject area was in the range of 13 to 34 µg/m³. The maximum concentration was recorded in Lower camp (30 µg/m³) and minimum concentration was recorded in Cumbum (13 µg/m³) presented in Table 29.

Table 34: Ambient Air Quality Status (NO₂) (April – June 2017)

Averaging Time: 24 hrs.

Unit: µg/m³


Sl. No.	Sampling Station	Max	Min	Arithmetic Mean	Standard Deviation	98 th Percentile
AAQ1	Lower Camp	34	24	27	2.8	34
AAQ2	Gudalur	20	17	19	1.1	20
AAQ3	Cumbum	16	13	15	1.0	16
AAQ4	Chinnamanur	21	15	19	1.6	21
AAQ5	Theni	24	18	22	2.9	24
AAQ6	Pannaipatti	18	14	17	1.4	18
AAQ7	Samayanallur	30	21	26	2.6	30
AAQ8	Madurai	27	18	24	3.2	27

Note: Permissible limit of NO₂ for Industrial, Residential, Rural and other area is 80 µg/m³.

Figure 11: Ambient Air Quality Sampling Photos



Figure 12: Ambient Air Quality Sampling Location Map

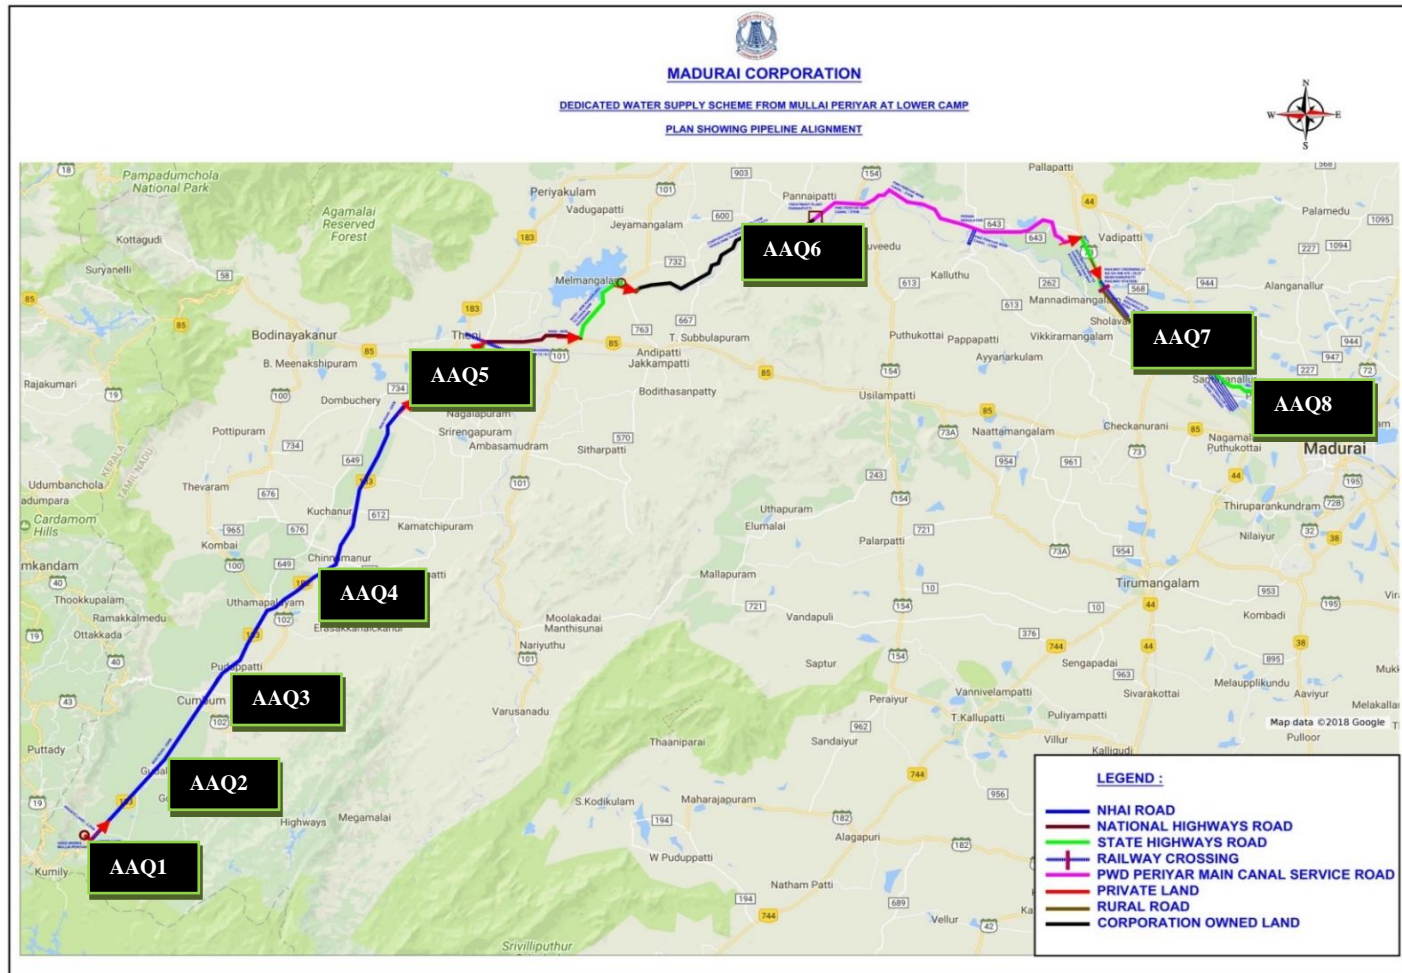

Station	Ground Water Sampling Location
AAQ 1	Lower Camp
AAQ 2	Gudalur
AAQ 3	Cumbum
AAQ 4	Chinnamanur
AAQ 5	Theni
AAQ 6	Pannaipatti
AAQ 7	Samayanallur
AAQ 8	Madurai

103. **Noise Environment.** The main objective of noise monitoring in the study area is to establish the baseline noise levels and assess the impact of the total noise expected to be generated by the construction and operation of the proposed activity.

1. Identification of Sampling Locations


104. A preliminary reconnaissance survey has been undertaken at 8 locations in June, 2020 to identify the major noise generating sources in the area and accordingly sampling locations are fixed (refer Figure 12). The noise levels at each location were recorded for 24 hours. The outcome of the monitoring is given in the Table 35.

Table 35: Equivalent Day-Night Noise Level Details

Station No.	Sampling Stations	Equivalent Levels dB(A)			
		Day Time		Night Time	
		Min	Max	Min	Max
SN1	Lower Camp	48.8	53.1	37.4	42.2
SN2	Gudalur	48.6	52.7	36.4	41.7
SN3	Cumbum	49.2	54.3	40.1	44.2
SN4	Chinnamanur	49.1	54.1	39.9	43.9
SN5	Theni	47.4	52.2	38.3	43.2
SN6	Pannaipatti	49.7	54.2	38.7	43.5
SN7	Samayanallur	49.3	54.4	38.3	43.1
SN8	Madurai	49.9	54.8	38.8	44.4

105. The daytime noise levels range between 47.4 dB(A) and 54.8 dB(A). The maximum value 54.8 dB (A) was recorded at Madurai and the minimum value (48.6 dB [A]) was recorded at Gudalur. The nighttime noise levels ranges between 37.5 dB (A) and 44.4 dB (A). The maximum value (44.4dB [A]) was recorded at Madurai and the minimum value (36.4 dB [A]) was recorded at Gudalur.

Figure 13: Noise Sampling Location Map

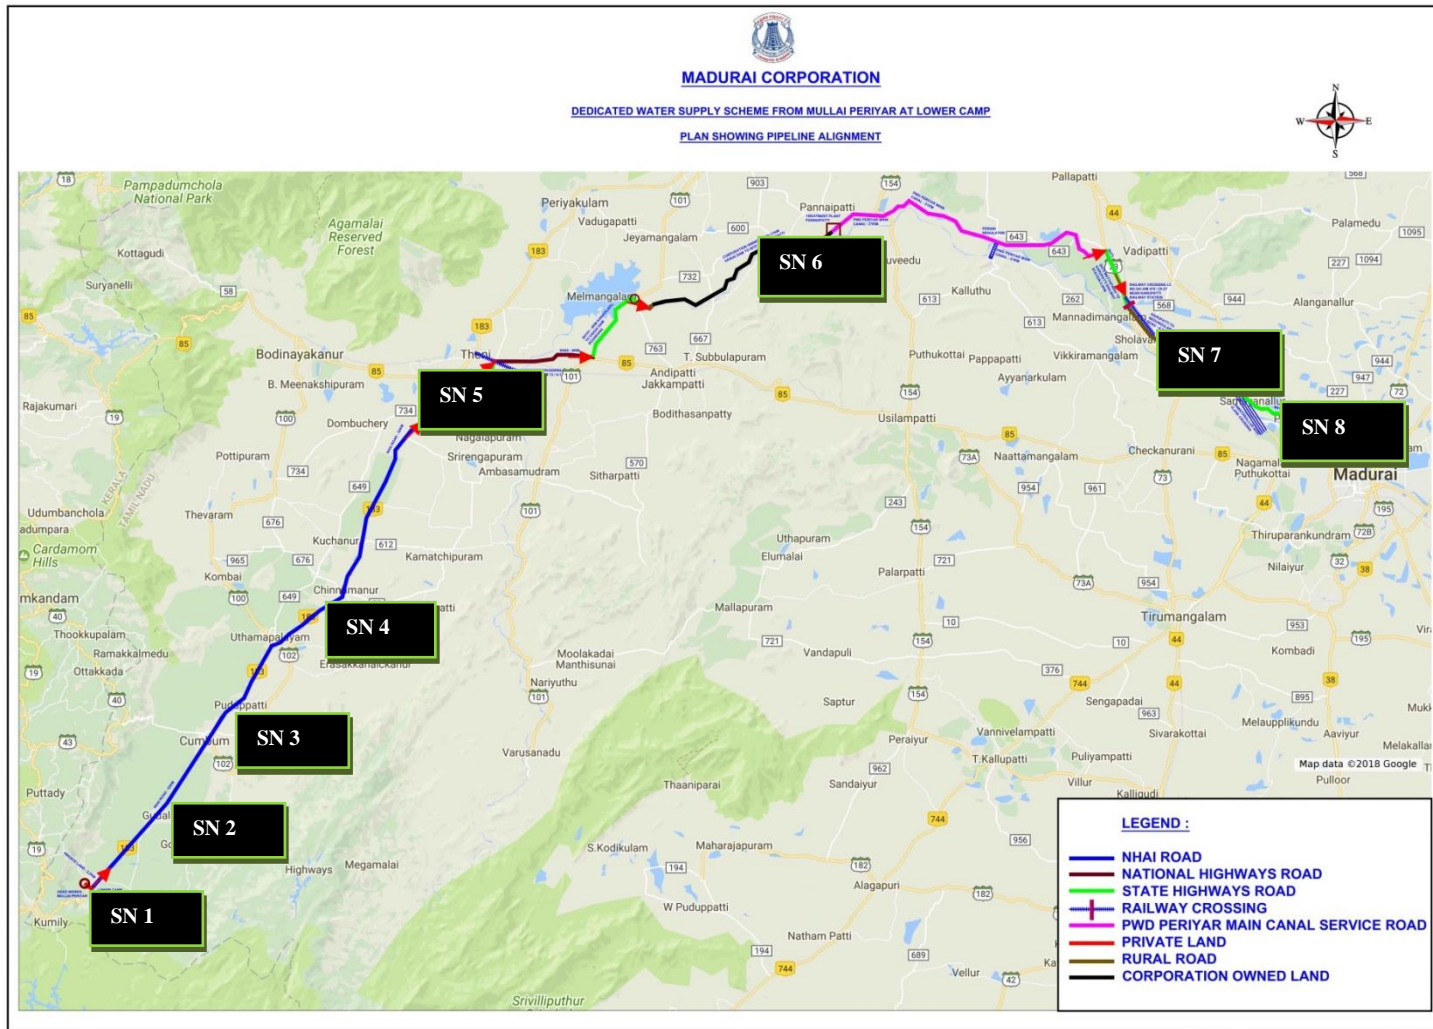


Stations	Ground Water Sampling Location
SN1	Lower Camp
SN 2	Gudalur
SN 3	Cumbum
SN 4	Chinnamanur
SN 5	Theni
SN 6	Pannaipatti
SN 7	Samayanallur
SN 8	Madurai

Figure 14: Water Quality Sampling Photos



Figure 15: Water Sampling Locations

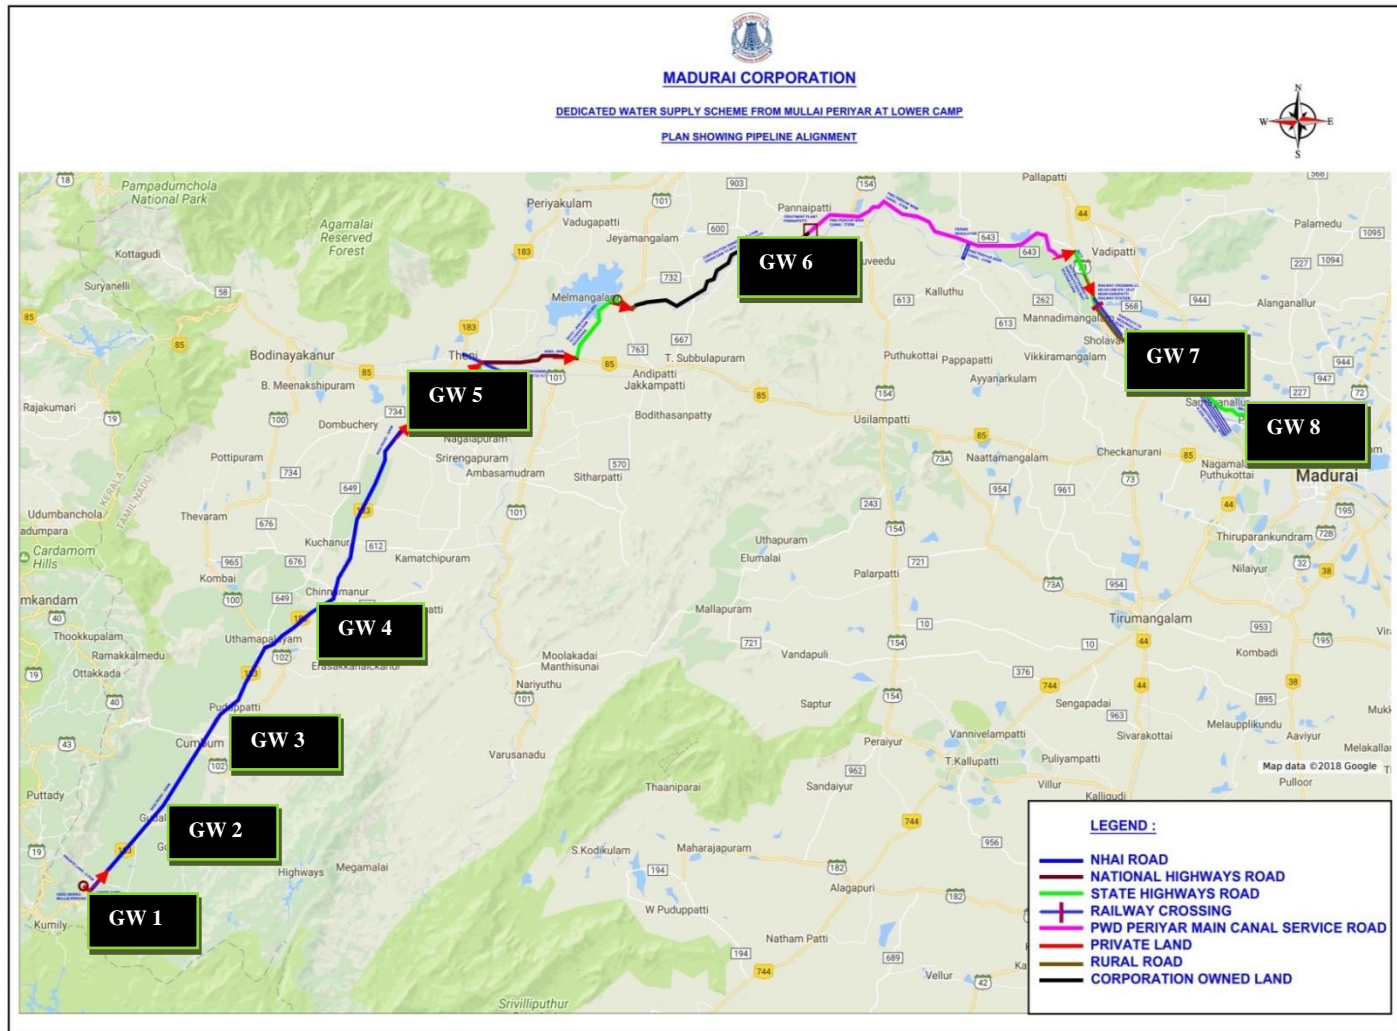

Stations	Ground Water Sampling Location
GW1	Lower Camp
GW 2	Gudalur
GW 3	Cumbum
GW 4	Chinnamanur
GW 5	Theni
GW 6	Pannaipatti
GW 7	Samayanallur
GW 8	Madurai

109. **Soil Quality.** The study on the soil profile establishes the baseline characteristics and identifies the incremental concentrations. The sampling locations have been identified with the following objectives:

- (i) to determine the baseline soil characteristics of the study area; and
- (ii) to determine the impact on soil more importantly from agricultural productivity point of view.

110. Eight locations in the study area were selected for soil sampling. At each location, soil samples were collected from three different depths viz. 30 cm, 60 cm and 90 cm below the surface and homogenized. The homogenized samples were taken to identify soil conditions. The samples were collected by ramming a core-cutter into the soil up to a depth of 90 cm. Simultaneously, in-situ infiltration test using double ring infiltrometer was carried out at all location to determine the permeability. The details of the sampling location is shown in Figure 15 and outcome of the results are given in Table 37.

- (i) It has been observed that the pH of the soil in the study area ranged from 6.8 to 8.4 the maximum pH value of 8.4 was observed at Samayanallur, whereas the minimum value of 6.0 was observed at Gudalur & Cumbum;
- (ii) The electrical conductivity was observed to be in the range of 95 mmhos/cm to 425 mmhos/cm, with the maximum observed at Lower camp with the minimum observed at Gudalur & Cumbum;
- (iii) The nitrogen values range between 1.0 to 3.4%, with the maximum observed at Lower camp with the minimum observed at Madurai;
- (iv) The phosphorus values < 0.1 kg/ha, indicating that the phosphorus content in the study area falls in average sufficient to more than Sufficient; and
- (v) The potassium values range between 18–108 kg/acre, with the maximum observed at Madurai with the minimum observed at Gudalur.


Table 37: Results of Soil Quality Parameters

S. no	Parameters	Units	Results							
			SA-1	SA-2	SA- 3	SA- 4	SA- 5	SA - 6	SA-7	SA-8
1	pH	No.	8.0	6.8	6.8	6.9	8.3	7.4	8.4	7.2
2	EC	mmhos/cm	425	95	95	97	178	134	216	160
3	Texture	---	Sandy Loam	Sandy Loam	Sandy Loam	Sandy Loam	Sandy Loam	Sandy Loam	Sandy Loam	Sandy Loam
Macro Nutrients:										
4	Nitrogen	%	3.4	1.2	1.4	0.8	0.4	1.4	1.2	1.0
5	Phosphorus	%	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
6	Potassium	kg/Acre	38	18	58	12	64	92	26	108
Micro Nutrients:										
7	Iron	mg/kg	14164	8868	9344	9144	11615	11618	10144	9654
8	Manganese	mg/kg	165	121	166	116	194	208	158	156
9	Zinc	mg/kg	1.6	5.4	14	1.4	10	12	1.0	1.0
10	Copper	mg/kg	1.9	1.0	6.9	1.0	1.4	1.4	1.2	4.4

Figure 16: Soil Sampling Photos



Figure 17: Soil Sampling Locations

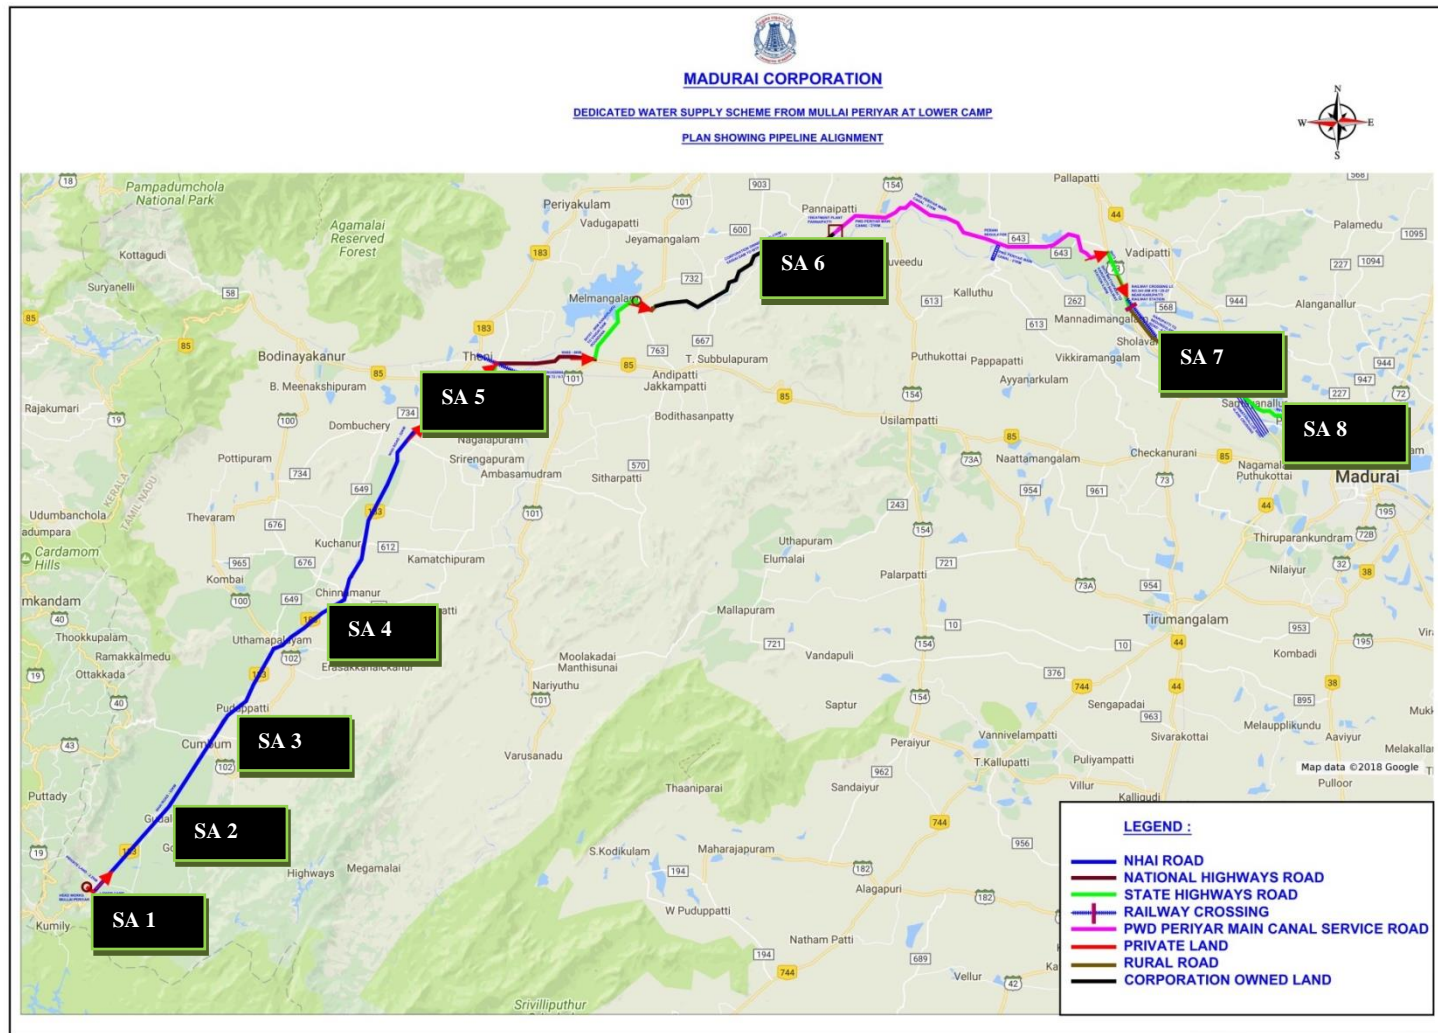

Stations	Soil Sampling Locations
SA 1	Lower Camp
SA 2	Gudalur
SA 3	Cumbum
SA 4	Chinnamanur
SA 5	Theni
SA 6	Pannaipatti
SA 7	Samayanallur
SA 8	Madurai

1. Land environment

111. **Land Use Pattern.** Land use pattern for Madurai City as existed in 1994, 2001 and in 2021 is as given in the following Table 38.

Table 38: Details of Land Use Pattern

Sl. No	Type of Land Use	Area in km ²			% to the Developed Area		
		1994	2001	2021	1994	2001	2021
1	Residential	21.45	21.79	24.75	57.49	57.49	50.36
2	Commercial	1.94	4.14	4.7	5.32	5.32	9.57
3	Industrial	2.1	3.12	3.12	5.63	5.63	6.35
4	Education	1.72	3.62	3.62	4.61	4.61	7.36
5	Public & Semi-Public	2.65	4.66	4.66	7.1	7.1	9.49
6	Transportation / Circulation	7.41	8.29	16.86	19.85	19.85	8.29
7	Sub-Total (Developed Area)	37.32	45.61	49.14	100	100	100
8	WaterBodies	5.03	2.07	2.07	--	--	--
9	Agriculture	9.48	4.14	0.61	--	--	--
10	Sub-Total (Un-DevelopedArea)	14.06	6.21	2.68	--	--	--
	Total	51.82	51.96	51.96	--	--	--


km = kilometer.

112. **Topography.** In general, the topography of the MMC is gently sloped towards Vaigai River. There are small hillockswithin the Madurai District, but not within the city limit (MMC). These are located at Anaimalai, Nagamalai, Pasumalai and Sikandamalai and the distant ranges of Sirumalai, Karandamalai, Alagar Malai and Aaliur Hill, which form the panoramic landscape features.

Figure 18: Topographic map of Madurai City



Figure 19: Drainage map of Madurai City

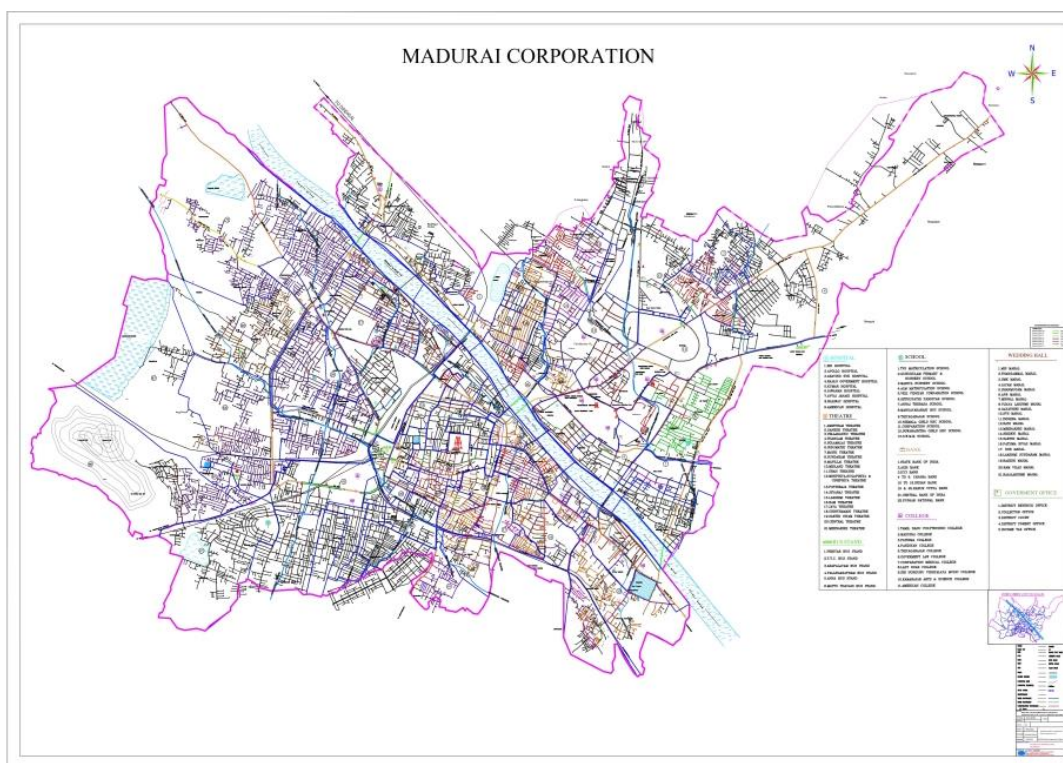

113. **Drainage.** Vaigai, a major ephemeral river originates in Western Ghats of Theni District flow in NW-SE direction, in the central part of the district. In addition, tributaries of Vaipar and Gundar drain in south-western part of the district, while the tributaries of Pambar drained in northeastern part. The general flow direction of the drainage is NW-SE.

C. Biological Environment

114. The main objective of the study is to provide necessary information on floristic structure of the study area. The climatic and biotic variations and composition of species, which are adapted to these variations, have resulted in different vegetation covers. The tree species, shrubs, herbs, climbers and grasses were documented during the study period and now the tree species present in the WTP and in the other area has been given in Table 39. The tree species observed in the study area are listed in Table 40; the shrubs observed in the study area are documented in Table 41; the herbs & grasses in Table 42 and climbers in Table 43.

115. **Tree species.** Fifty-two tree species belonging to 24 families were observed in the study area (Table 39). The dominant tree species in the study area are *Anacardium occidentale*, *Coccus nucifer*, *Albizia lebbeck*, *Delonix regia*, *Casuarina equisetifolia*, *Musa paradisiaca*. *Ficus benghalensis*, *Anacardium occidentale*, *Phoenix sylvestris* and *Erythrina indica*.

Table 39: List of Tree Species present in Package I & II

Sl.No	Variety	Nos
In Package I		
1	Neem Tree	46
2	Teak Tree	202
3	Kapok Tree	4
4	Rain Tree	82
5	Coconut Tree	85
	Total	419
If trees present, it will transplanted if possible or tree cutting will be done after getting permission and compensation of 1:10 will be done.		
In Package II		
1	Mango Tree	170
2	Sapota Tree	112
3	Guava Tree	10
4	Nelli Tree	84
5	Naval Tree	71
6	Theku Tree	5
7	Vembu Tree	32
	Total	484
484 nos trees are transplanted and in it 474 nos were survived.		
In Package III & Package IV		
Not identified. If trees present it will transplanted if possible or tree cutting will be done after getting permission and compensation of 1:10 will be done.		

Table 40: List of Tree Species

S. No	Family Name	Botanical Name	Vernacular name
1	<i>Anacardiaceae</i>	<i>Mangifera indica</i>	Mamaram
		<i>Lannea coromandelica</i>	Otti
2	<i>Annonaceae</i>	<i>Polyalthia longifolia</i>	Nettilingam
3	<i>Areaceae</i>	<i>Borassus flabellifer</i>	Panai
		<i>Caryota urens</i>	Kuntharpanai
		<i>Coccus nucifera</i>	Thennai
		<i>Roystonea regia</i>	Arasapanai
		<i>Spathodea campanulata</i>	Patadi
4	<i>Apocynaceae</i>	<i>Alstonia scholaris</i>	Yelilai pillai
		<i>Plumeria alba</i>	Perunkalli
5	<i>Caesalpiniaceae</i>	<i>Cassia fistula</i>	Sarakondrai
		<i>Cassia siamea</i>	Manjalkondrai
		<i>Peltophorum pterocarpum</i>	Perunkondrai
		<i>Tamarindus indica</i>	Puliyamaram
6	<i>Cannabaceae</i>	<i>Trema orientalis</i>	Yeralai
7	<i>Caricaceae</i>	<i>Carica papaya</i>	Pappali
8	<i>Casuarinaceae</i>	<i>Casuarina equisetifolia</i>	Savukku
9	<i>Combretaceae</i>	<i>Terminalia catapa</i>	Patham
10	<i>Euphorbiaceae</i>	<i>Euphorbia tirucalli</i>	Kalli
11	<i>Fabaceae</i>	<i>Acacia auriculiformis</i>	Kathi savukku
		<i>Bauhinia purpurea</i>	Mantharai
		<i>Delonix regia</i>	Semmayir kondrai
		<i>Gliricidia sepium</i>	Seemai agathi
		<i>Leucaena leucocephala</i>	Periyathagarai
		<i>Pongamia glabra</i>	Pungan
		<i>Pongamia pinnata</i>	Pungan
12	<i>Lamiaceae</i>	<i>Gmelina arborea</i>	Kumalamaram
		<i>Tectona grandis</i>	Thekku
13	<i>Lecythidaceae</i>	<i>Barringtonia acutangula</i>	senkadampu
14	<i>Malvaceae</i>	<i>Thespesia populnea</i>	Poovarasu
15	<i>Meliaceae</i>	<i>Azadiracta indica</i>	Vembu
16	<i>Mimosaceae</i>	<i>Acacia nilotica</i>	Karuvelai
		<i>Albizia lebbek</i>	Vagai
		<i>Pithecellobium dulce</i>	Kodikai
		<i>Samanea saman</i>	Thungumunji maram
17	<i>Moraceae</i>	<i>Ficus bengalensis</i>	Aalamaram
		<i>Ficus hispita</i>	Peiaththi
		<i>Ficus racemosa</i>	Anai athi
		<i>Ficus religiosa</i>	Arasamaram
18	<i>Moringaceae</i>	<i>Moringa oleifera</i>	Murungai
		<i>Morinda tinctoria</i>	Manjanethi
19	<i>Musaceae</i>	<i>Musa paradisiacal</i>	Valai
20	<i>Myristicaceae</i>	<i>Myristica fragrans</i>	Sathikai
21	<i>Myrtaceae</i>	<i>Callistemon lanceolatus</i>	Bottle brush
		<i>Eucalyptus</i>	Thailamaram
		<i>Syzygium cumini</i>	Naval
22	<i>Rubiaceae</i>	<i>Neolamarckia cadamba</i>	Cadampam
23	<i>Rutaceae</i>	<i>Aegle marmelos</i>	Vilvam
		<i>Murraya exotica</i>	-
		<i>Murraya koenigii</i>	Karuvepillai
24	<i>Sapotaceae</i>	<i>Manilkara zapota</i>	Sapotta

116. **Shrub Species.** During the survey a total of 26 shrub species belonging to 17 families from the study area were observed. The dominant shrubs in the study area were *Calotropis gigantea*, *Calotropis procera*, *Tecoma stans*, *Jatropha curcas*, *Ricinus communis*, *Ipomoea carnea*, *Ziziphus jujube*, *Solanum torvum* and *Ricinus communis*. The shrubs observed in the study area are given in the Table 41.

Table 41: List of Shrub Species

S. No	Family Name	Botanical Name	Vernacular name
1	Apocynaceae	<i>Nerium indicum</i>	Arali
		<i>Nerium oleander</i>	Sevvarali
		<i>Tabernaemontana divaricata</i>	Nanthiyavattai
2	Asclepidaceae	<i>Calotropis Gigantea</i>	Vellerukku
		<i>Calotropis procera</i>	Erukku
	Bignoniaceae	<i>Tecoma stans</i>	Nagasambagam
3	Convolvulaceae	<i>Ipomoea carnea</i>	Kulai kuchi
4	Euphorbiaceae	<i>Jatropha curcas</i>	Kattamanakku
		<i>Ricinus communis</i>	Amanakku
5	Leguminaceae	<i>Bauhinia racemosa</i>	kattathi
6	Lythraceae	<i>Lawsonia innemmis</i>	Maruthani
	Malvaceae	<i>Hibiscus rosa-sinensis</i>	Semparuthi
7	Mimosaceae	<i>Projopis juliflora</i>	Seemai karuvelam
8	Nyctaginaceae	<i>Bougainvillea spectabilis</i>	Kakitha poo
9	Pandanaceae	<i>Pandanus parkinson</i>	Thazhai
10	Rhamnaceae	<i>Ziziphus rugosa</i>	Ilanthai
11	Rosaceae	<i>Rosa indica</i>	Rose
12	Rubiaceae	<i>Ixora coccinia</i>	Idly poo
13	Rutaceae	<i>Citrus medica</i>	Elumichai
14	Solanaceae	<i>Datura stramonium</i>	Umaththai
15	Solanaceae	<i>Xanthium strumarium</i>	Marulumaththai
16	Verbinaceae	<i>Clerodendrum inerme</i>	Sangam
		<i>Duranta erecta</i>	
		<i>Lantana camara</i>	Unni sedi
		<i>Vitex negundo</i>	Notchi

117. **Herb Species.** At the time of survey, the herb and grasses are observed to be dried (during summer season); however, few herbs and grass are observed in the surroundings of the riverbank and ponds/ tanks. As per the inventory, there are a total 42 herb and grass species belonging to 23 families were recorded (Table 42). Some of the common species identified are *Nymphaea* sp, *Ruellia tuberosa*, *Typha angustifolia*, *Aerva lanata* and *Nymphaea* sp.

Table 42: List of Herbs and Grasses in the Study Area

S. No	Family Name	Botanical Name	Vernacular name
1	Acanthaceae	<i>Asteracantha longifolia</i>	Neermulli
2	Amaranthaceae	<i>Achyranthes aspera</i>	Nayuruvi
		<i>Celosia argentea</i>	Kozhi poo
3	Apocynaceae	<i>Catharanthus roseus</i>	Nithya kalyani
4	Araceae	<i>Colocasia esculenta</i>	Samai kilangu
5	Asteraceae	<i>Ageratum conyzoides</i>	Appakkoti
		<i>Eclipta alba</i>	Karisan kanni
		<i>Tridax procumbens</i>	Thatha poochedi
		<i>Wedelia trilobata</i>	Manjal karisalan kanni
6	Brassicaceae	<i>Raparus sativus</i>	Mullangi
7	Caesalpinaceae	<i>Cassia tora</i>	Sirukondrai

S. No	Family Name	Botanical Name	Vernacular name
		<i>Cassia alata</i>	Seemai agathi
8	Convolvulaceae	<i>Merremia emarginata</i>	Elikkadhu-keerai
9	Cyperaceae	<i>Cyperus rotundus</i>	Korai
10	Euphorbiaceae	<i>Acalypha indica</i>	kuppaimeni
		<i>Euphorbia hirta</i>	Amman pacharisi
11	Fabaceae	<i>Tephrosia purpurea</i>	Kolinch
12	Lamiaceae	<i>Hyptis suaveolens</i>	Nattapoochedi
		<i>Leucas aspera</i>	Thumbai
13	Nelumbonaceae	<i>Nelumbo nucifera</i>	Thamarai
14	Nyctaginaceae	<i>Boerhavia diffusa</i>	Mukkuruttai kodi
15	Nymphaeaceae	<i>Nymphaea odorata</i>	Alli
16	Pedaliaceae	<i>Pedaliium Murex</i>	Yanai nerunchi
17	Poaceae	<i>Bambusa bambos</i>	Moongil
		<i>Cynodon dactylon</i>	Arugam pul
		<i>Heteropogon contortus</i>	-
		<i>Oriza sativa</i>	Nel
		<i>Panicum miliare</i>	samai
		<i>Paspalum scrobiculatum</i>	Varagu
		<i>Saccharum arundinaceum</i>	Nanal
		<i>Saccharum officinarum</i>	Karumpu
18	Polygonaceae	<i>Polygonum glabrum</i>	Sivappu Kumbakodaali
19	Ponterderiaceae	<i>Eichhornia crassipes</i>	Agaya thamarai
20	Portulacaceae	<i>Portulaca oleracea</i>	Siru pasalai
21	Solanaceae	<i>Lycopersicon esculentum</i>	Thakkali
		<i>Physalis minima</i>	Sodakku thakkali
		<i>Solanum melongena</i>	kaththari
		<i>Solanum trilobatum</i>	Thuthuvalai
		<i>Solanum virginianum</i>	Kandankathiri
		<i>Solanum xanthocarpum</i>	Sundai kai
22	Typhaceae	<i>Typha angustifolia</i>	Sambu
23	Zygophyllaceae	<i>Tribulus terrestris</i>	Nerunchi

118. **Climbers.** The climbers were observed in the riverside and ponds/ tanks of the study area. Totally 9 climber species belonging to 7 families were noted from the study area Table 37. Some of the common species identified in the project area are *Ipomoea sp*, *Solanum trilobatum*, *Clitoria ternatea* and *Luffa acutangula*.

Table 43: List of Climbers in the Study Area

S. No	Family Name	Botanical Name	Vernacular name
1	Asclepidaceae	<i>Pergularia daemia</i>	Veliparuthi
2	Convolvulaceae	<i>Ipomoea aquatica</i>	vallai
		<i>Ipomoea digitata</i>	Nilapoosani
		<i>Ipomoea pes-caprae</i>	Aatukkal
3	Cucurbitaceae	<i>Citrullus lanatus</i>	peikumatti
4	Fabaceae	<i>Luffa acutangula</i>	Aagasaveni
5	Menispermaceae	<i>Clitoria ternatea</i>	Sangu poo
6	Polygonaceae	<i>Cocculus hirsutus</i>	Kattu kodi
7	Sapindaceae	<i>Antigonon leptopus</i>	Kodi rose

119. **Fauna.** Faunal survey covers the terrestrial fauna, avian fauna and aquatic fauna. The survey was based on visual observation, enquiry with local population and records available. This

survey will include identification of endangered and rare species as per Red Book. Both direct and indirect observation methods were used to survey the fauna. Visual encounter (search) method was employed to record vertebrate species. Additionally, survey of relevant literature was also done to consolidate the list of vertebrate fauna distributed in the area (*Smith 1933-1943, Ali and Ripley 1983, Daniel 1983, Prater 1993, Murthy and Chandrasekhar 1988*). Since birds may be considered as indicators for monitoring and understanding human impacts on ecological systems (*Lawton, 1996*).

120. Based on the Wildlife Protection Act, 1972 (*WPA 1972, Anonymous 1991, Upadhyay 1995, Chaturvedi and Chaturvedi 1996*) species were short-listed as Schedule II or I and where referred during the study. As per the study, there is no endangered / red list species in the study area.

121. **Birds.** The different species of birds are observed in the study area during the study period and they are given below and also enlisted in the Table 38. The common important birds species observed in the study area are *Acridotheres tristis*, *Alcedo atthis*, *Anas crecca*, *Ardea alba*, *Ardea cinerea*, *Bubo*, *Bubulcus ibis*, *Pycnonotus jocosus*, *Centropus sinensis*, *Cinnvris lotensis*, *Corvus corvus*, *Corvus splendens*, *Coryllis vaeralis*, *Dicrurus macrocerus*, *Egretta garzetta*, *Estrilda amanda va*, *Gallinula chloropus*, *Gallus gallus*, *Haliastur Indus*, *Hierococyx varius*, *Coracias benghalensis*, *Lalage sykesi*, *Megalaima merulinus*, *Merops leschenaultia*, *Microfus affinis*, *Micropterus brachyurus*, *Muscicapa latirostris*, *Myctrea leucopcephala*, *Nectarinia asiatica*, *Oriolus oriolus*, *Passer domesticus*, *Phalococorax carbo*, *Phalococorax Niger*, *Ploceus philippines*, *Podiceps yuficolis*, *Pycnonotus cafer* and *Temenuchus pagodarum*.

122. **Reptiles.** The common reptile's species that are observed in the study area were *Rana tigrina*, *Lepus nigricollis*, *Funabulus palmarum*, *Rattus norvegicus*, *Herpestes edwardii*, *Bandicota indica* and *Rana hexadactyla*.

Table 44: List of the Faunal Diversity of the Study Area

Technical Name	Common Name	Distribution
<i>Acridotheres tristis</i>	Common myna	Common
<i>Alcedo atthis</i>	Common Kingfisher	Common
<i>Anas crecca</i>	Common teal	Observed
<i>Ardea alba</i>	Large egret	Common
<i>Ardea cinerea</i>	Grey heron	Common
<i>Bubo</i>	Indian great horned Owl	Common
<i>Bubulcus ibis</i>	Cattle Egret	Common
<i>Centropus sinensis</i>	Crow Pheasant	Common
<i>Cinnvris lotensis</i>	Loten's sunbird	Common
<i>Corvus corvus</i>	Jungle crow	Common
<i>Corvus splendens</i>	House crow	Common
<i>Coryllis vaeralis</i>	Lorikeet	Common
<i>Dicrurus macrocerus</i>	Black Drongo	Common
<i>Egretta garzetta</i>	Little Egret	Common
<i>Estrilda amanda va</i>	Red munia	Rare
<i>Gallinula chloropus</i>	Moor hen	Rare
<i>Gallus gallus</i>	Red Jungle fowl	Common
<i>Haliastur Indus</i>	Brahmny kite	Common
<i>Hierococyx varius</i>	Common Hawk Cuckoo	Common
<i>Coracias benghalensis</i>	Indian roller	Common
<i>Lalage Sykesi</i>	Black headed cochoo Shrike	Common
<i>Megalaima merulinus</i>	Indian Cuckoo	Common

Technical Name	Common Name	Distribution
<i>Merops leschenaultia</i>	Chestnut headed Bee Eater	Common
<i>Microfus affinis</i>	House swift	Common
<i>Micropterus brachyus</i>	Rufous Wood pecker	Observed
<i>Muscicapa latirostris</i>	Brown flycatcher	Rare
<i>Myctrea leucopcephala</i>	Painted stork	Common
<i>Nectarinia asiatica</i>	Purple sunbird	Observed
<i>oriolus oriolus</i>	Indian Oriole	Common
<i>Passer domesticus</i>	House Sparrow	Common
<i>Phalococorax carbo</i>	Large coramant	Common
<i>Phalococorax nicer</i>	Little coramant	Common
<i>Ploceus philippines</i>	Weaver bird	Common
<i>Podiceps yuficolis</i>	Little grebe	Observed
<i>Pycnonotus cafer</i>	Red vented bulbul	Common
<i>pycnonotus jokonus</i>	White brewed Bulbul	Common
<i>Temenuchus pagodarum</i>	Brahmny Myna	Common
<i>calotes versicolor</i>	Common garden lizard	Rare
<i>Bangarus spp</i>	Krait	Rare
<i>Naja Naja</i>	Indian cobra	Rare
<i>Rana hexadactyla</i>	Frog	Common
<i>Rana tigrina</i>	Bull frog	Common
<i>Lepus nigricollis</i>	Hare	Herbivorous
<i>Funabulus palmarum</i>	Squirrel	Herbivorous
<i>Rattus norvegicus</i>	Field mouse	Herbivorous
<i>Herpestes edwardii</i>	Common mongoose	Carnivorous
<i>Bandicota indica</i>	Bandicoot	Herbivorous

Source: Divisional Forest Officer.

123. **Aquatic Ecology/ Environment.** Water samples were collected from Mullaiperiyar Dam and it was centrifuged to concentrate the plankton organisms. Each sample was made up to 100 ml after removing from the centrifuge tube. General phytoplanktons were studied for quantitative and qualitative details. To assess the species diversity and the seasonal dynamics of different species of phytoplankton in the Mullaiperiyar Dam, all the different genera were identified and they were counted individually. Phytoplankton identified in the Mullaiperiyar Dam belongs to four classes namely *Cyanophyceae*, *Euglenophyceae*, *Bacillariophyceae* and *Chlorophyceae*. Average seasonal density of phytoplankton varied from 250 cells (southwest monsoon) to 496 cells (pre-monsoon). In general higher phytoplankton density was much more pronounced during the pre-monsoon than the monsoon periods in the Mullaiperiyar Dam. The common fish species observed in the Mullai Periyar River includes *Puntius melanampyx*, *Puntius carnaticus*, *Puntius amphibious*, *Puntius fasciatus*, *Puntius mahecola*, *Devario aequipinnatus*, *Garra mullya*, *Travancoria jonesi* and *Nemacheilus guntheri*. As per the IUCN category, the fish species are categorised under Least Concern.

D. Socio-economic Environment

1. Demography

124. Total population of the Madurai Municipal Corporation is 1,846,801 as per 2011 census. The detail of population is given in the Table 45.


Table 45: Details Considered (As Per 2011 Census)

Description	Nos.
Total Population	1,846,801
In the age group 0-6 years	185,526
Scheduled Castes (SC)	151,124
Scheduled Tribes (ST)	6,230
Literates	1,485,340
Illiterate	361,461
Total Worker	728,895
Main Worker	662,665
Marginal Worker	64,230
Non Worker	1,119,906
Number of Households	479,851

Source: Census 2011.

2. Sex Ratio

125. The sex ratio of 999 females per 1,000 males is higher than the national average of 944. Madurai metropolitan area constitutes the third largest metropolitan area in Tamil Nadu and the 24th in India. 8.99% of the population was under 6 years of age.

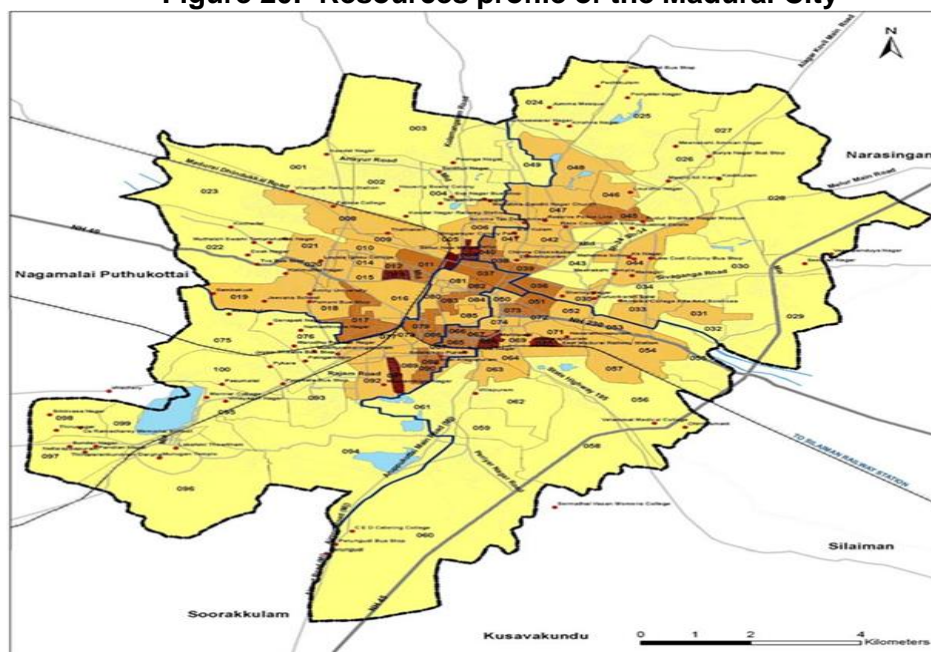Figure 20: Resources profile of the Madurai City

3. Work Force Participation

126. The details of work force participation is given in the Table 46.

- (i) Madurai ranks 9th with respect to the share in State GDP having 3.67% contribution to the total state GDP;
- (ii) Major economic activities are trade & commerce, tourism related activities and to some extent industrial activities;

- (iii) The city houses various health care facilities, automobile, rubber, chemical, and textile manufacturing industries and has also developed as a second-tier city for information technology as well;
- (iv) Increasing trend of tertiary sector with involvement of 87% population indicating major role of tourism and trade;
- (v) The secondary sector comprising majorly the household handloom industry has declined from 4.06% in 2001 to 3.61% in 2011;
- (vi) The Work Force Participation Rate is 39% showing an increase over the past decade; and
- (vii) Share of marginal workers has grown from 4.31% in 2001 to 7.49% in 2011 indicating the high percentage of daily wages workers coming from adjacent areas to the city.

Table 46: Details of work force participation rate

Details	Number	Growth %
Primary sector	8,683	2%
Secondary sector	20,614	4%
Tertiary sector	499,264	94%
Total main worker	528,561	36%
Marginal worker	42,767	3%
Total non-worker	899,427	61%
Total population	1,470,755	
Work participation rate	36%	

4. Housing Scenario

127. The details of house stocks are given in Table 47 and the quality of housing are given in Table 48.

- (i) Present housing stock is adequate with 80% houses under residential use and 20% under mixed area;
- (ii) The growth in housing stock during the period of 2001-2011 was 27%; and
- (iii) There is considerable increase in number of liveable (67%) and dilapidated houses (34%) in the city.

Table 47: Details of Housing Stock

Parameters	2001	2011	Growth (%)
Total Census Houses	240,666	329,775	27
Vacant Houses	10,516	16,776	37
Occupied Houses	230,150	312,999	26
Residential Use	194,552	262,163	26
Residential Cum Other Purpose	35,598	50,836	30

Table 48: Quality of Housing

Parameters	2001	2011	Growth (%)
Good	185,986	223,042	17
Livable	13,122	40,904	68
Dilapidated	982	312,999	39
	200,090	265,561	25

5. Infrastructure

128. **Transport and Traffic.** Road development, public transport services and suburban rail transport are recognized as essential for the efficient functioning of the urban system. The major arterial & sub-arterial road corridors and other roads are developed and maintained by National Highway, State Highway and the local bodies concerned respectively. As regards traffic management and enforcement, the same is looked after by the City Traffic Police in respect of Greater City Area and District Police for the remaining City Area. The public bus transport is with State Transport Corporation.

6. Education

129. There are 47 approved institutions of the university in and around the city consisting of autonomous colleges, aided colleges, self-financing colleges, constituent colleges, evening colleges and other approved institutions. There are seven polytechnics and five Industrial training institutes (ITIs) in Madurai, with the Government ITI and the Government Polytechnic for Women.





7. Water Supply





130. Water Supply Department is taking care of planning and formulating water supply schemes, execution of scheme works and maintenance of water supply. Functions such as provision of new water service connection, conversion of category of service connection, name change, clearing of blocks in water supply. Redressal of other grievances are also carried out by MMC.





8. Industries


131. Madurai is one of the few rubber growing areas in South India, and there are rubberbased industries in Madurai. Automobile manufacturers are the major consumers of rubber components produced in the city. There are numerous textiles, granite and chemical industries operating in Madurai. Madurai is promoted as a second-tier city for IT and some software companies have opened their offices in Madurai. Software Technology Parks of India, an agency of the Government of India, has authorised several such companies to receive benefits under its national information technology development program. The state government proposed two IT-based Special Economic Zones (SEZ) in Madurai, and these have been fully occupied by various IT companies.






Table 49: Subproject site Environmental Features






S. No	Old OHT No	Infrastructure	Location and Environmental Features	Site Photograph
1.		Headworks	Lower Camp, Work not started. Checkdam – 1no, Raw water intake well – 4 nos Tree cutting details given in table 39. Permission Details given in Appendix -11	
2.		Transmission Main	Laying of M.S pipes in raw main near vaigai dam Package-I Raw water pumping main – 95.74 kms (For 69 kms M.S. pipe 1064 mm and for 26 kms M.S. pipe 1118 mm) Package – III having stretch of 54.35 kms M.S. pipe 1422 mm. Pipe carrying bridge – 7 nos Railway crossing – 1 no. Tree cutting details given in table 39. Permission Details given in Appendix -11	
3.		Water Treatment Plant	Construction under progress at Pannaipatti Area allotted is 5.2 acres, Trees present in the location are 484 nos which was transplanted and 474 nos has been survived. Details given in table 39. Permission Details given in Appendix -11	
4.		Feeder Main	Consists of 37 OHTs and 1 sump. Clear water gravity main length 65.260 kms Tree cutting details given in table 39. Permission Details given in Appendix -11	






S. No	Old OHT No	Infrastructure	Location and Environmental Features	Site Photograph
5.	25	Semparuthi Nagar–NZ1	An overhead tank having a capacity of 18 lakhs liter (LL) will be constructed in Madurai Municipal Corporation Vilangudi, Semparuthi nagar park vacant land at ward no.23 Vilangudi having an area of 400 m ² . It will be located in West; compound wall will be constructed around the OHT.	
6.	24	Muthuramalinga Puram Bykara (ward 100)	An overhead tank having a capacity of 5 LL will be constructed in Madurai Municipal Corporation Muthuramalingapuram near to Existing OHT land at ward no.100 Muthuramalingapuram, Bykara having an area of 196 sqmt. It will be located in Centre, compound wall will be constructed around the OHT.	
7.	51	Muthuramalinga puram	A sump having capacity of 3 lakhs liter will be constructed in Madurai Municipal Corporation Moolakarai sump vacant land at ward no.99 Moolakarai sump having area at 81 m ² . It will be located in North; compound wall will be constructed around the OHT.	
8.	23	Muniyandi Kovil street (Ward 100,75)	An overhead tank having a capacity of 4 LL will be constructed in Madurai Municipal Corporation Muniyandi kovil street, Muniyandi kovil backside at ward no.75 & 100 Muniyandi kovil having an area of 81 m ² . It will be located in southwest; compound wall will be constructed around the OHT.	






S. No	Old OHT No	Infrastructure	Location and Environmental Features	Site Photograph
9.	50	Balaji Nagar – SZ12	An overhead tank having capacity of 5 LL will be constructed in Madurai Municipal Corporation thiruparankudram vacant land at ward no.99 Thiruparankundram having area at 196 m ² . It will be located in Right side of the park; compound wall will be constructed around the OHT.	
10.	48	Harveypatti – SZ10	An overhead tank having capacity of 10 LL will be constructed in Madurai Municipal Corporation Harveypatti park vacant land at ward no.98 Harveypatti having area at 400 m ² . It will be located in south; compound wall will be constructed around the OHT.	
11.	49	Kurinchi Nagar – SZ11 (Thirunagar)	An overhead tank having capacity of 5 LL will be constructed in Madurai Municipal Corporation Thirunagar Kurinchi nagar, Utchayamedu vacant land at ward no.98 Kurinchi nagar having area at 196 m ² . It will be located in Northeast; compound wall will be constructed around the OHT.	
12.	16	Muthupatti Nagar near PS	An overhead tank having a holding capacity of 20 LL will be constructed in Madurai Municipal Corporation, Muthupatti nagar at ward no.93 (Vacant land near Pumping Station) having an area of 729 m ² . The OHT will be located in Northeast direction, provided with a compound wall.	






S. No	Old OHT No	Infrastructure	Location and Environmental Features	Site Photograph
13.	14	TVS Park Sathya sai Nagar	An overhead tank having a holding capacity of 25 LL will be constructed in Madurai Municipal Corporation Sathyasai nagar, at ward no.77 (Vacant land available in Sundarajapuram Park) having an area at 700 m ² . The OHT will be located in Eastern direction, provided with a compound wall	
14.	15	TVS Park Sathya sai Nagar	An overhead tank having a holding capacity of 25 LL will be constructed in Madurai Municipal Corporation (TVS Park) Sathyasai nagar at ward no.92 having an area at 700 m ² . The OHT will be located in southern direction, provided with compound wall.	
15.	45	Villapuram – SZ6 (Ward – 61)	An overhead tank having capacity of 10 LL will be constructed in Madurai Municipal Corporation Villapuram existing OHT vacant land at ward no.61 Villapuram OHT having area at 400 m ² . It will be located in Southwest, compound wall will be constructed around the OHT.	
16.	43	MMC Colony – SZ 5	An overhead tank having capacity of 15 LL will be constructed in Madurai Municipal Corporation Avaniyapuram MMC colony vacant land at ward no.94 MMC colony having area at 250 m ² . It will be located in east; compound wall will be constructed around the OHT.	
17.	44	MMC Colony – SZ4	An overhead tank having capacity of 10 LL will be constructed in Madurai Municipal Corporation Avaniyapuram MMC colony vacant land at ward no.94 MMC colony having area at 200 m ² . It will be located in west; compound wall will be constructed around the OHT.	

S. No	Old OHT No	Infrastructure	Location and Environmental Features	Site Photograph
18.	47	Vellakkal – SZ8	An overhead tank having capacity of 11 LL will be constructed at opposite side of Vellakkal Corporation bungalow vacant land at ward no.94 Vellakkal having area at 200 m ² . It will be located in east; compound wall will be constructed around the OHT.	
19.	19	Vaalaithoppu Corporation Ground	An overhead tank having a holding capacity of 25 LL will be constructed in Madurai Municipal Corporation, Vaalaithoppu (towards Chinthamani main road from Kamarajar salai) at ward no.64 (vacant land) having an area of 900 m ² . The OHT will be located in center, provided with, compound wall	
20.	41	Chinna Anuppanadi – SZ2	An overhead tank having capacity of 15 LL will be constructed in Madurai Municipal Corporation Chinna anuppanadi school playground vacant land at ward no. 56 Chinna Anuppanadi having area at 400 m ² . It will be located in West; compound wall will be constructed around the OHT.	
21.	42	Gurunathar Koil – SZ3 (Chinnthamani)	An overhead tank having capacity of 12 LL will be constructed in Madurai Municipal Corporation Chinthamani near to Gurunathan kovil land at ward no. 58 Iravathanallur burial ground having area at 225 m ² . It will be located in east; compound wall will be constructed around the OHT.	
22.	17	Thideer Nagar	An overhead tank having a holding capacity of 30 LL will be constructed in Madurai Municipal Corporation (vacant land available near to fire station) having an area at 1200 m ² .	

S. No	Old OHT No	Infrastructure	Location and Environmental Features	Site Photograph
23.	2	Sellur Kanmai – Composting yard Sector 6 (Singarayar Colony)	An overhead tank having a holding capacity of 25 LL will be constructed in an old composting yard in sector 6 at ward o.n2 Sellur Kanmai having an area of 900 m ² . It will be located in southwest direction; compound wall will be constructed around the OHT.	
24.	4	Sellur Kanmai – Composting yard Sector 6 (Sellur)	An overhead tank having a holding capacity of 25 lakhs litre will be constructed in an Old composting yard in sector 6 at ward No.2 Sellur Kanmai having an area of 900 m ² . It will be located in Southwest direction; compound wall will be constructed around the OHT.	
25.	29	Indranagar – NZ2	An overhead tank having a capacity of 15 lakhs litre will be constructed in Madurai Municipal Corporation Indiranagar, Karisalkulam 2 nd railway gate crossing vacant land at ward No.1 Karisalkulam having area at 400 m ² . It will be located in Northwest, compound wall will be constructed around the OHT.	
26.	30	Park Town – NZ5	An overhead tank having capacity of 13 lakhs liter will be constructed in Madurai Municipal Corporation Meenakshi nagar, Thapalthanthi nagar NGO colony park, Park Town vacant land at ward No.4 Park Town having area at 400 m ² . It will be located in South; compound wall will be constructed around the OHT.	
27.	32	EB Colony – NZ7	An overhead tank having capacity of 18 LL will be constructed in Madurai Municipal Corporation EB colony vacant land at ward No.25 EB colony having area at 400 m ² . It will be located in Northeast; compound wall will be constructed around the OHT.	

S. No	Old OHT No	Infrastructure	Location and Environmental Features	Site Photograph
28.	37	Poriyalar Nagar	An overhead tank having capacity of 7 lakhs liter will be constructed in Madurai Municipal Corporation Pandian nagar – Engineer nagar park vacant land at ward No.24 Pandian nagar – Engineer nagar having area at 50 m ² . It will be located in South, compound wall will be constructed around the OHT.	
29.	34	Bharath Nagar	An overhead tank having capacity of 20 lakhs liter will be constructed in Madurai Municipal Corporation Bharathnagar, vacant land at ward No.23 having area at 1200 m ² . It will be located in south; compound wall will be constructed around the OHT.	
30.	35	Island Nagar – NZ8 (Ward – 48)	An overhead tank having capacity of 12 lakhs liter will be constructed in Madurai Municipal Corporation Island nagar near to pond vacant land at ward No.48 Island nagar having area at 200 m ² . It will be located in West; compound wall will be constructed around the OHT.	
31.	3	Sellur Lorry Stand	An overhead tank having a holding capacity of 30 LL will be constructed in Madurai Municipal Corporation, Southside of Sellur Lorry Stand at ward no.37 having area at 900 m ² . Compound wall will be constructed around the OHT.	
32.	6	SMP Colony near Mayor Bungalow (MPS site)	An overhead tank having a holding capacity of 10 lakhs litre will be constructed in Madurai Municipal Corporation, SMP colony at ward no.33 (vacant land near to Mayor Bungalow) having an area at 200 m ² . The OHT will be located in southwest direction, provided with a compound wall.	

S. No	Old OHT No	Infrastructure	Location and Environmental Features	Site Photograph
33.	39	Shenpagathottam – NZ15	An overhead tank having capacity of 25 LL will be constructed in Madurai Municipal Corporation Shenpagathottam park-2 near to Anna nagar channel vacant land at ward No.33 Shenpagathottam having area at 650 m ² . It will be located in northeast; compound wall will be constructed around the OHT.	
34.	7	KK Nagar (Central Veg. Market)	An overhead tank having a holding capacity of 12 LL will be constructed in Madurai Municipal Corporation, KK nagar Mellur main road, at ward no.45 (in the vacant land available in Mattuthavani Vegetable Market) having an area of 196 m ² . The OHT will be located in southeast direction, provided with compound wall.	
35.	13	Kochadai back side of Pumping station	An overhead tank having a holding capacity of 25 LL will be constructed in Madurai Municipal Corporation at ward no.22 (vacant land near Commissioner Bungalow Kochadai) having an area of 729 m ² . The OHT will be located in Northwest direction, provided with a compound wall.	
36.	12	VKP Nagar Madakulam	An overhead tank having a holding capacity of 20 LL will be constructed in Madurai Municipal Corporation, Madakkulam VKP nagar at ward no.76 having area at 729 m ² . The OHT will be located in southern direction, provided with compound wall.	
37.	10	Arappalayam Two-wheeler Parking	An overhead tank having a holding capacity of 12 LL will be constructed in a vacant land available in the ward no.10 (behind Arapalayam Two-wheeler stand) having an area of 200 m ² . The OHT will be located in Northwest direction, provided with a compound wall	

S. No	Old OHT No	Infrastructure	Location and Environmental Features	Site Photograph
38.	20	AVSS Hospital behind MPS Santhaipettai	An overhead tank having a holding capacity of 20 LL will be constructed in Madurai Municipal Corporation, Santhaipettai, at ward no.53 (Vacant land available at backside of main pumping station) having area of 900 m ² . It will be located in eastern direction, provided with compound wall.	
39.	21	Meenakshi Nagar	An overhead tank having a holding capacity of 15 LL will be constructed in Madurai Municipal Corporation, at ward no.54 (vacant land available in Meenakshi Nagar Slaughter house) having an area of 750 m ² . The OHT will be located in eastern direction, provided with compound wall. Old site changed due to National Highways formed 2 lane roads.	
40.	53	Ulaganeri – NZ 11 (Ward – 28)	An overhead tank having capacity of 12 LL will be constructed in Madurai Municipal Corporation Ulaganeri near to High court street existing OHT vacant land at ward no.28 Ulaganeri having area at 400 m ² . It will be located in west; compound wall will be constructed around the OHT.	
41.	54	Pandian Nagar – NZ12	An overhead tank having capacity of 25 LL will be constructed in Madurai Municipal Corporation Pandiyan nagar near to Pandi kovil police station vacant land at ward no.31 Pandiyan nagar having area at 1225 m ² . It will be located in southwest; compound wall will be constructed around the OHT.	
42.		Distribution System	Distribution System – DI pipe of size 250 mm dia to 400 mm and HDPE PE 100 PN80 pipes upto 200 mm will be laid at the side of the roads.	

132. The distribution main, feeder main and conveying main will be laid along the edge of the streets and roads without affecting the existing infrastructures. Before commencing the pipe laying work, necessary road cut restoration charges will be paid to the concerned Department and permission will be obtained to cut open the road. On completion of the pipe laying work, the roads will be properly filled and consolidated with excavated earth and intimated to the Department concerned. The National highways authority and State highways authority will carry out the restoration of road.

During implementation of work at project site/alignment if hard rock identified, the measures will be followed as per the norms specified in the IEE report.

V. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

133. Potential environmental impacts of the proposed infrastructure components are presented in this section. Mitigation measures to minimize/mitigate negative impacts, if any, are recommended along with the agency responsible for implementation. Monitoring actions to be conducted during the implementation phase is also recommended to reduce the impact.

134. Screening of potential environmental impacts are categorized into four categories considering subproject phases: location impacts and design impacts (pre-construction phase), construction phase impacts and operations and maintenance phase impacts.

- (i) **Location impacts** include impacts associated with site selection and include loss of on-site biophysical array and encroachment either directly or indirectly on adjacent environments. It also includes impacts on people who will lose their livelihood or any other structures by the development of that site;
- (ii) **Design impacts** include impacts arising from Investment Program design, including technology used, scale of operation/throughput, waste production, and ancillary services;
- (iii) **Construction impacts** include impacts caused by site clearing, earthworks including controlled blasting, machinery, vehicles and workers. Construction site impacts include erosion, dust, noise, traffic congestion and waste production; and
- (iv) **Operation and Maintenance impacts** include impacts arising from the operation and maintenance activities of the infrastructure facility. These include routine management of operational waste streams, and occupational health and safety issues.

135. Screening of environmental impacts has been based on the impact magnitude (negligible/moderate/severe – in the order of increasing degree) and impact duration (temporary/permanent).

136. This section of the IEE reviews possible project-related impacts, in order to identify issues requiring further attention and screen out issues of no relevance. ADB SPS, 2009 require that impacts and risks will be analyzed during pre-construction, construction, and operational stages in the context of the project's area of influence. The ADB Rapid Environmental Assessment Checklist in http://www.adb.org/documents/guidelines/environmental_assessment/eaguidelines002.asp has been used to screen the project for environmental impacts and to determine the scope of the IEE.

137. In the case of this project, most of the individual elements involves simple construction and operation techniques except for the blasting activities. By using the gravity based system, impacts will be minimum. Most of the predicted impacts are associated with the construction process, and are produced because that process is invasive, involving excavation and earth movements and being mostly located on the roadside (SH, NH, ODR and rural roads) so will not cause direct impact on biodiversity values. The blasting proposed is “controlled blasting” following necessary precautionary measures including usage of appropriate quantities of explosives hence that the nearby structures and properties are unlikely to be affected and impacts related to controlled blasting such as dust generation, increased noise levels would be mitigated. The project will be located in the properties held by the local government and access to the project location is through public rights-of-way (ROW) and existing roads. The head works site is the only land need to be procured for an extent of 2 acres, for which consent from the owner of the land has been obtained. Land acquisition is in process, and is with Revenue Department with private owner now negotiation. The details of the land acquisition is covered under the resettlement plan.

A. Pre-Construction Impacts- Design and Location

138. **Design of the Proposed Components.** The Central Public Health and Environment Engineering Organization (CPHEEO) manual suggests a design period of 15/30 years. The water supply components were designed following the recommendations of the CPHEEO manual for water supply and treatment.

139. Impacts arise from the design of the project including the technology used, scale of operation, waste production, discharge specification, pollution sources and ancillary services.

140. Impacts associated with the planning mainly depend on the site selection. Location impacts include on-site biophysical array and encroachment / impact either directly or indirectly on adjacent environments. It also includes the impacts on the people who might lose their properties or livelihoods due to the development of the proposed site.

141. Construction works in the Madurai Municipal Corporation area, the pipelines are to be laid on or along the roads in the unused vacant land adjacent to the roads within the project area. In the narrow roads (where there is no vacant land adjoining road), pipeline will be buried within the road right of way. However, considering the narrow and busy lanes, temporary impacts are likely during construction stage.

142. **Site selection of sources of materials.** Extraction of materials can disrupt natural land contours and vegetation resulting in accelerated erosion, disturbance in natural drainage patterns, ponding and water logging, and water pollution. To mitigate the potential environmental impacts, locations of quarry site/s and borrow pit/s (for loose material other than stones) would be included in the design specifications and on plan drawings. If other sites are necessary, these would be located away from population centers, drinking water intakes and streams, cultivable lands, and natural drainage systems; and in structurally stable areas even if some distance from construction activities. It will be the construction contractor's responsibility to verify the suitability of all material sources and to obtain the approval of the PIU (Madurai Municipal Corporation). If additional quarries will be required after construction is started, then the Construction Contractor shall use the mentioned criteria to select new quarry sites, with written approval of Madurai Municipal Corporation.

B. Construction Impacts

143. **Impact on Air Quality.** During construction period, the impacts on air quality are mainly due to the material movement and the actual construction activities. Due to material movement air, quality over the immediate influence area will be affected though, not in significant levels. There will be increase in the dust levels. In order to reduce the dust emissions in the construction area due to material transport and construction activities, provisions should be made for sprinkling of water on all the roads in the area of improvement. It should be ensured that

- (i) construction debris is removed daily;
- (ii) construction requiring street closings should be performed during off-peak hours;
- (iii) idling of delivery trucks or other equipment should not be permitted during periods of unloading or when they are not in active use;
- (iv) low emission construction vehicles should be used wherever possible; and
- (v) as soon as construction is over the surplus earth should be utilised to fill up low-lying areas. In no case, loose earth should be allowed to pile up in the streets.

144. Anticipated impacts during the construction phase are discussed below along with appropriate mitigation measures to avoid, minimize or mitigate those impacts to acceptable levels.

145. **Sources of Materials.** For the construction work, the required materials like coarse aggregate and fine aggregate will be obtained from the permitted / licensed quarries by Department of Geology & Mining, Government of Tamil Nadu. Contractor should not create/use any new borrow pits / quarries. The contractor should also make a concerted effort to re-use as much excavated material from this project as possible.

146. The construction contractor will be required to:

- (i) Obtain construction materials only from government-approved quarries with prior approval from Madurai Municipal Corporation;
- (ii) Madurai Municipal Corporation to review, and ensure that proposed quarry sources have all necessary clearances/ permissions in place prior to approval;
- (iii) Contractor to submit to Madurai Municipal Corporation on a monthly basis documentation on material obtained from each source (quarry/ borrow pit); and
- (iv) Avoid creation of new borrow areas, quarries, etc., for the project; if unavoidable, contractor to obtain all clearances and permissions as required under law, including environmental clearance prior to approval by Madurai Municipal Corporation.

147. Air Pollution during Construction work, especially from earthwork activities, coupled with dry and windy working conditions, material and debris transports, and works along the public roads carrying significant traffic, have high potential to generate dust. Significant quantities of earthwork will be conducted in the subproject, spread all over the project area. Nearly 10,00,000 m³ of earthwork is anticipated from the subproject, and 90-95% of which will be reused for filling the trenches. Also, emissions from construction vehicles, equipment, and machinery used for excavation and construction will induce impacts on the air quality. Anticipated impacts include dust and increase in concentration of vehicle-related pollutants such as carbon monoxide, sulfur oxides, particulate matter, nitrous oxides, and hydrocarbons. Dust generation from construction work in individual and confined work sites for underground tank (UGT), OHT, etc., will be mainly during the initial construction phase of earthwork, as the site is confined, dust can be effectively controlled with common measures. Dust generation will be significant during pipe laying along the roads. Increase in dust/ particulate matter in ambient air is detrimental and may have adverse impacts on people and environment. To mitigate the impacts, construction contractors will be required to:

- (i) For all construction works
 - (a) Damp down the soil and any stockpiled material on site by water sprinkling (3-4 times a day before the start of work, 1-2 times in between, and at the end of the day) when working in the roads there should permanently be one person responsible for directing when water sprinkling needs to take place to stop the dust moving;
 - (b) Reduce the need to sprinkle water by stabilizing surface soils where loaders, support equipment and vehicles will operate by using water and maintain surface soils in a stabilized condition;
 - (c) Apply water prior to levelling or any other earth moving activity to keep the soil moist throughout the process;
 - (d) Cover the soil stocked at the sites with tarpaulins and surround by dust screens;
 - (e) Control access to work area, prevent unnecessary movement of vehicle, public trespassing into work areas; limiting soil disturbance will minimize dust generation;

- (f) Use tarpaulins to cover the loose material (soil, sand, aggregate etc.,) when transported by open trucks;
 - (g) Control dust generation while unloading the loose material (particularly aggregate, sand, soil) at the site by sprinkling water and unloading inside the barricaded area, minimize the drop height when moving the excavated soil;
 - (h) For sections involving controlled blasting, ensure that adequate cover is provided to prevent emission of dust during controlled blasting.
 - (i) Clean wheels and undercarriage of haul trucks prior to leaving construction site;
 - (j) Ensure that all the construction equipment, machinery is fitted with pollution control devices, which are operating correctly, and have a valid pollution under control (PUC) certificate; and
 - (k) No vehicles or plant to be left idling at site generators to be at placed maximum distance from properties.
- (ii) For pipe laying works
- (a) Inform the residents likely to be affected by the works in the locality about the upcoming pipe laying works well in advance so that necessary arrangements are planned by the residents with reduced inconvenience.
 - (b) For sections where the controlled blasting is proposed, the residents are provided with the schedule of blasting at least three days in advance and the residents are explained about the preventive, precautionary, mitigation and emergency response measures being taken to address their concerns.
 - (c) The project staff from the PIU, consultants and contractors would undertake a survey of structures (including videography and/or photography) lying within the area of influence of blasting from the impacts (preferably in the presence of the owners of the said structures) during pre- and post-blasting situations to assess and/or ascertain regarding the damages, if any, caused to the structures because of blasting activities.
 - (d) Barricade the construction area using hard barricades (of 2 m height) on both sides;
 - (e) Initiate site clearance and excavation work only after barricading of the site is done;
 - (f) Confine all the material, excavated soil, debris, equipment, machinery (excavators, cranes, etc.), to the barricaded area;
 - (g) Limit the stocking of excavated material at the site; remove the excess soil from the site immediately to the designated disposal area;
 - (h) Undertake the work section wise a 100 m section should be demarcated and barricaded; open up several such sections at a time, but care shall be taken to locate such sections in different zones;
 - (i) The section proposed for blasting shall be supervised by properly trained staff to ensure no movement of pedestrians, motorized or non-motorized vehicles, and residents takes place during blasting within the area of influence.
 - (j) For sections involving controlled blasting, ensure that dust curtains of adequate height are provided to the trenches to prevent emission of dust during drilling for charge holes and controlled blasting.
 - (k) Ensure that the excavated soil and debris along the section identified for blasting is sprinkled with adequate water prior to blasting to reduce dust emissions upon explosion of charge placed for breaking the hard rock;

- (l) Ensure that adequate precautions are taken to avoid flying debris post blasting (such as covering the trench with sturdy metallic sheets having sufficient weights to absorb the blast waves);
- (m) Conduct work sequentially - excavation, pipe laying, backfilling; testing section-wise (for a minimum length as possible) so that backfilling, stabilization of soil can be done;
- (n) Remove the excavated soil of first section to the disposal site; as the work progresses sequentially, by the time second section is excavated, the first section will be ready for back filling, use the freshly excavated soil for back filling, this will avoid stocking of material, and minimize the dust; and
- (o) Backfilled trench at any completed section after removal of barricading will be the main source of dust pollution. The traffic, pedestrian movement and wind will generate dust from backfilled section. Road restoration shall be undertaken immediately.

148. Excavation and refilling activities disturb the topsoil, and under the influence of wind, traffic, pedestrians, and other activities etc., produces dust. There is large potential to generate significant quantities of dust after refilling the trench, and prior to road relaying. It is a common practice not to restore the road immediately after refilling the trench so as to allow sufficient time for the refilled material to stabilize naturally. Given the dry and windy conditions, and heavy traffic and other activities along the roads, the refilled trenches with loose topsoil along the roads will generate maximum dust and create very unhealthy conditions. Moreover, as the barricades/ dust screens will be removed after the trench is refilled, there will be absolutely nothing to control the dust generation. Dust control activities like wetting of topsoil will not be effective given the site conditions. It is therefore necessary to restore/ relay the road surface immediately or take suitable steps to arrest the dust. Soil consolidation technique shall be used so that road can be restored immediately.

149. While obtaining permission for the proposed raw water transmission main from NH, SH & rural roads, the necessary restoration charges will be paid and accordingly the respective department will restore their roads.

150. **Generation of Construction Wastes.** Solid wastes generated from the construction activities are excess excavated earth (spoils), discarded construction materials, cement bags, wood, steel, oils, fuels and other similar items. Domestic solid wastes may also be generated from the workers' camp. Improper waste management could cause odor and vermin problems, pollution and flow obstruction of nearby watercourses and could negatively impact the landscape. Earthwork excavation in the road will be reused for leveling the roadside and earth excavation from other location will be safely disposed to corporation lands.

151. The following mitigation measures to minimize impacts from waste generation shall be implemented by the contractor:

- (i) Prepare and implement a Construction Waste (Spoils) Management Plan (format is given in Appendix 4);
- (ii) Avoid stockpiling any excess spoils at the site for long time. Excess excavated soils should be disposed to corporation lands;
- (iii) If disposal is required, the site shall be selected preferably from barren, infertile lands; sites should be located away from residential areas, forests, water bodies and any other sensitive land uses;
- (iv) Domestic solid wastes should be properly segregated in biodegradable and non-biodegradable for collection and disposal to designated solid waste disposal site;

create a compost pit at workers camp sites for disposal of biodegradable waste; non-biodegradable / recyclable material shall be collected separately and sold in the local recycling material market;

- (v) Prohibit burning of construction and/or domestic waste;
- (vi) Ensure that wastes are not haphazardly thrown in and around the study area; provide proper collection bins, and create awareness to use the dustbins; recycle waste material where possible; and
- (vii) Conduct site clearance and restoration to original condition after the completion of construction work; PIU to ensure that site is properly restored prior to issuing of construction completion certificate.

152. Surface Quality Impacts. Madurai and surrounding region receive average rainfall and there are a number of natural and man-made drainage channels crossing the city to carry the runoff safely. Runoff from the excavated areas and material and waste soil stocks likely to contain silt, and this silt runoff will deteriorate the water bodies due to silting. Large-scale silting is likely to lead to flooding. This impact will however be considered only during rainy season. These potential impacts are temporary and are of short-term duration only and to ensure these are mitigated, construction contractor will be required to:

- (i) Avoid stockpiling of earth fill especially during the monsoon season unless covered by tarpaulins or plastic sheets;
- (ii) Prioritize re-use of excess spoils and materials in the construction works. If spoils will be disposed, consult with Madurai city municipal corporation on designated disposal areas;
- (iii) Install temporary silt traps or sedimentation basins along the drainage leading to the water bodies;
- (iv) Place storage areas for fuels and lubricants away from any drainage leading to water bodies; and
- (v) Dispose any wastes generated by construction activities in designated sites; and
- (vi) Conduct surface quality inspection according to the EMP.

153. Aquatic Environmental Impacts. The intake well is proposed on the banks of the Mullai Periyar River and hence it will not have a direct impact on the existing aquatic ecology of the river. Information obtained from the secondary sources reveals that there are no movement/ migration of fish species/ fish breeding ground or endangered fish species/ aquatic animals found in the River Mullai Periyar. Hence the proposed Intake well construction works will not have any impact on the fish species/ fish breeding pattern. However, care shall be taken to avoid deposition/ disposal of construction waste / accidental spillage of construction material into the river and also construction works shall be restricted during the monsoon seasons.

154. Water Treatment Plant. The raw water source is not suitable for the drinking purpose, so the water treatment plant (WTP) is proposed to treat raw water to meet the drinking water standards before distribution. The proposed WTP is being constructed in 12.5-acre land at Pannaipatti Village. The treatment plant layout has been planned to treat 125 MLD of raw water. The WTP is based on conventional treatment process involving coagulation, flocculation, sedimentation, filtration process, disinfection etc. The construction of WTP is under Design and Build basis as per the process specified to suit the available site.

155. To ensure optimal utilization and reduction of wastage, necessary design is incorporated in WTP to recycle the wash water. The backwash water (3% of capacity) from proposed WTP will be stored within the premises for further recirculation. For reuse and recirculation of the backwash water, proper recirculation system will be installed in the proposed WTP. From the recycled quantity, a maximum of 2.5% out of 3% and the balance 0.5% will be utilized for gardening and

other uses inside the WTP site. Prior to discharge/ reuse the backwash will be tested in the Laboratory proposed in the WTP site.

156. Sludge from the Water Treatment Plant is proposed to be dried in the sludge drying beds. The dried sludge will be stored in stockyard within the WTP premises and it will be disposed periodically or in the area identified by the Madurai Municipal Corporation at a maximum distance of 30 km from WTP. The drained water from sludge drying bed and supernatant water from sludge thickener will be sent into re-circulation sump. The sludge shall be taken to the sludge balance tank and from there discharge to nearby drain. The filtrate will be recirculated to the raw water distribution chamber.

157. **Chlorine use in Water Treatment Plant.** There is invariably a safety risk when considerable quantities of chlorine are handled at the WTP. *The per day consumption of chlorine is around 1 tonne. Therefore, the yearly consumption is 365 tonnes at the WTP.* The cylinders will be stored in a bay with individual foundations with trunnion wheels as support for easy handling. The cylinders are kept in horizontal positions on the trunnion wheels. An EOT crane with electrical motor is provided for safe handling to reduce the man usage, as it is a hazard gas. To avoid any risk to workers and public, the chlorination facility at the WTP will be provided with all appropriate safety features and equipment to meet with any accidental eventuality, which may include:

- (i) chlorine neutralization pit with a lime slurry feeder;
- (ii) proper ventilation, lighting, entry and exit facilities;
- (iii) facility for isolation in the event of major chlorine leakage;
- (iv) personal protection and safety equipment for the operators in the chlorine plant; the emergency repair kit, personal safety kit like full body cover, oxygen kit for breathing, face mask, body shower and eye washers would be provided
- (v) laboratory facility shall not be housed within the chlorination facility;
- (vi) provide training to the staff in safe handling and application of chlorine; this shall be included in the contract of chlorinator supplier;
- (vii) visible and audible alarm facilities to alert chlorine gas leak;
- (viii) supplier of chlorinator equipment shall provide standard operating manual for safe operation and as well as maintenance and repairs; preferably these shall be provided both in English and Tamil Languages; and
- (ix) If the chlorine storage will be within 100 m of any sensitive receptor, the project will involve them in the emergency response planning. In this project, nearest residential unit are located about 260 m from the proposed WTP plant. Therefore, the project will not involve them in the emergency response planning.

158. **Noise and Vibration Levels.** The water distribution station sites are located within habitations, where there are houses, schools and hospitals, religious places and businesses. During construction stage increase in noise level may be caused by excavation, particularly breaking of cement concrete or bitumen roads *and controlled blasting for removal of hard rocks in sites and along the alignment* for the purpose of laying of pipe, operation of construction equipment, and the transportation of equipment, materials, and people. Vibration generated from construction activity, for instance from the use of explosives for controlled blasting and pneumatic drills, will have impact on nearby buildings. The construction contractor will be required to:

- (i) Plan activities in consultation with PIU so that activities with the greatest potential to generate noise are conducted during periods of the day which will result in least disturbance, especially near schools and other sensitive receptors;
- (ii) Minimize noise from construction equipment by using vehicle silencers, fitting jackhammers with noise-reducing mufflers, and use portable street barriers to minimise sound impact to surrounding sensitive receptor;

- (iii) Maintain maximum sound levels within the limits as prescribed by the prevailing Indian regulations and standards;
- (iv) Ensure to conduct a pre-blasting survey through videography and photography of residential properties and other structures falling along the sites or section of alignment to ascertain the prevailing conditions of the structures likely to be impacted by the controlled blasting and take adequate measures to minimise such impacts.
- (v) Horns should not be used unless it is necessary to warn road users or animals of the vehicle's approach; and
- (vi) Consult local communities in advance of the work to identify and address key issues, and avoid working at sensitive times, such as religious and cultural festivals.
- (vii) All the controlled blasting, shall be done by an approved and licensed Explosive contractor after submitting a blasting plan to PIU.

159. **Accessibility and Traffic Disruptions.** Madurai City Municipal Corporation is maintaining 1,572.38 km length of roads. 22.58 km of Stone cut & Tiles paved roads.

Table 50: Details of the Type of Roads and its Lengths

Roads	Length in km
Bus Route Roads	162.87 km
Ring Road	27.20 km
Internal Road	239.66 km
Total	532.22 km

Sl. No.	Roads	Length in km
1	B.T. Roads	947.94
2	C.C. Road	268.99
3	Metal Roads	125.50
4	Sand Road	207.52
5	Stone cut & Tiles paved roads	22.58
	Total	1,572.38
Sl. No	Road Category	Length (km)
1	Municipal Roads	661.81
2	Highways & Major District Roads	34.00
	Total	695.81

km = kilometer.

160. The main roads in the MMC carries considerable traffic. These roads are also centers of commercial activities. Internal roads in the project area are narrow, except in the newly developing residential layout, which comparatively have wide roads. Pipes to be laid across some of the arterial roads. In other corporation maintained busy roads, work will be taken up during non-traffic hours/ night hours without much hindrance to the free flow of traffic. Potential impact is negative but short term and reversible by mitigation measures. The construction contractor will be required to:

- (i) plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites;
- (ii) schedule transport and hauling activities during non-peak hours;
- (iii) locate entry and exit points in areas where there is low potential for traffic

- congestion;
- (iv) keep the site free from all unnecessary obstructions;
- (v) drive vehicles in a considerate manner;
- (vi) coordinate with City Traffic Office for temporary road diversions and necessary provision of traffic aids if transportation activities cannot be avoided during peak hours;
- (vii) notify affected sensitive receptors by providing sign boards informing nature and duration of construction works and contact numbers for concerns/complaints;
- (viii) provide planks across trenches in front of businesses, and ensure works are completed quickly to avoid disruption; and
- (ix) avoid full street closure.

161. **Surface and Groundwater Quality.** Another physical impact that is often associated with excavation is the effect on drainage and the local water table if groundwater and surface water collect in the voids. To ensure that water will not pond in pits and voids near subproject location, the construction contractor will be required to conduct excavation works on non-monsoon season.

162. **Accessibility.** Some of the roads in the subproject sites are narrow thus excavation and trenching works along right on the ways, hauling of construction materials and operation of equipment on- site can cause traffic problems. Potential impact is negative but short term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites;
- (ii) Schedule transport and hauling activities during non-peak hours;
- (iii) Locate entry and exit points in areas where there is low potential for traffic congestion;
- (iv) Keep the site free from all unnecessary obstructions;
- (v) Drive vehicles in a considerate manner;
- (vi) Coordinate with Madurai Traffic Office for temporary road diversions and with for provision of traffic aids if transportation activities cannot be avoided during peak hours;
- (vii) Notify affected sensitive receptors by providing sign boards informing nature and duration of construction works and contact numbers for concerns/complaints;
- (viii) Provide planks across trenches in front of businesses, and ensure works are completed quickly to avoid disruption; and
- (ix) Avoid full street closure.

163. **Socio-Economic – Income.** Sites for all project components are carefully selected in government owned lands. However, few temporary shops are located in the roadside that are likely to be affected due to the proposed raw water transmission line. For the loss of the livelihood, compensation has been estimated and mention in the resettlement plan. For this project, in the intake location there is an acquisition for 2 acres land from private owner accordingly compensation has been worked out. The details of the compensation is given in the resettlement plan. During the project implementation, blocking of access to the business / livelihood activities are envisaged, especially during pipeline laying along the roads, may impact the income of households. However, given the alignment of pipeline is within the road carriage way, and also the measures suggested for ensuring accessibility during pipe laying works are notable but temporary impact is envisaged. Some shops and other premises along the roads may lose business income if the access will be impeded due to excavation of trenches, the presence of heavy vehicles and machinery, etc. Access disruption to hospitals, socio cultural places etc., will

cause inconvenience to the public. Implementation of the following best construction measures will avoid the disturbance reduce the inconvenience and disturbance to the public.

- (i) Inform all businesses and residents about the nature and duration of any work well in advance so that they can make necessary preparations;
- (ii) Do not block any access; leave spaces for access between barricades/mounds of excavated soil and other stored materials and machinery, and providing footbridges so that people can crossover open trenches;
- (iii) Barricade the construction area and regulate movement of people and vehicles in the vicinity, and maintain the surroundings safely with proper direction boards, lighting and security personnel – people should feel safe to move around
- (iv) Control dust generation;
- (v) Immediately consolidate the backfilled soil and restore the road surface, this will also avoid any business loss due to dust and access inconvenience of construction work;
- (vi) Employee best construction practices, speed up construction work with better equipment, increase workforce, etc., in the areas with predominantly commercial, and with sensitive features like hospitals, and schools;
- (vii) Consult businesses and institutions regarding operating hours and factoring this in work schedules; and
- (viii) Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints.

164. **Socio-Economic – Employment.** Manpower will be required during the construction stage. This can result in generation of temporary employment and increase in local revenue. Thus, potential impact is positive and long-term. The construction contractor will be required to:

- (i) Employ local labour force as far as possible;
- (ii) If available, secure construction materials from local market;

165. **Occupational Health and Safety.** Workers need to be mindful of the occupational hazards which can arise from working in confined areas such as trenches, working at heights, near the heavy equipment operating areas, etc. Potential impacts are negative and long-term but reversible by mitigation measures. The construction contractor will be required to:

- (i) Follow all national, state and local labour laws (indicative list is in Appendix 2);
- (ii) Develop and implement site-specific occupational health and safety (OHS) plan which shall include measures such as: (a) safe and documented construction procedures to be followed for all site activities; (b) ensuring all workers are provided with and use personal protective equipment; (c) OHS Training for all site personnel; (d) excluding public from the work sites; and (e) documentation of work-related accidents; follow international standards such as the World Bank Group's Environment, Health and Safety Guidelines;
- (iii) Ensure that qualified first aid trained professional is deployed at all times. Equipped first-aid stations shall be easily accessible throughout the sites;
- (iv) Secure all installations from unauthorized intrusion and accident risks;
- (v) Provide OHS orientation training to all new workers to ensure that they are apprised of the basic site rules of work at the site, personal protective protection, and preventing injuring to fellow workers;
- (vi) Provide visitor orientation if visitors to the site can gain access to areas where hazardous conditions or substances may be present. Ensure also that visitor/s do not enter hazard areas unescorted;
- (vii) Ensure the visibility of workers through their use of high visibility vests and other PPEs when working in or walking through heavy equipment operating areas;

- (viii) Ensure moving equipment is outfitted with audible back-up alarms;
- (ix) Mark and provide sign boards for hazardous areas such as energized electrical devices and lines, service rooms housing high voltage equipment, and areas for storage and disposal. Signage shall be in accordance with international standards and be well known to, and easily understood by workers, visitors, and the general public as appropriate;
- (x) Provide supplies of potable drinking water;
- (xi) Provide clean eating areas where workers are not exposed to hazardous or noxious substances; and
- (xii) Disallow worker exposure to noise level greater than 85 dB (A) for a duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively.
- (xiii) A separate health and safety plan has been prepared to respond to ongoing corona virus disease (COVID-19) pandemic, which would be implemented by the contractor in addition to the provisions outlined here.

166. **Community Health and Safety.** Excavations along the roads & narrow streets and hauling of equipment and vehicles have potential to create safety risks to the community. Excavations without any proper protection may endanger the close by buildings. Hazards posed to the public, specifically in high-pedestrian areas may include traffic accidents and vehicle collision with pedestrians. Potential impact is negative but short-term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Confine work areas; prevent public access to all areas where construction works are on-going through the use of barricading and security personnel;
- (ii) Attach warning signs, blinkers to the barricading to caution the public about the hazards associated with the works, and presence of deep excavation;
- (iii) Minimize the duration of time when the trench for laying pipe is left open through careful planning; plan the work properly from excavation to refilling and road relaying;
- (iv) Control dust pollution – implement dust control measures as suggested under air quality section;
- (v) Ensure appropriate and safe passage for pedestrians along the work sites;
- (vi) Provide road signs and flag persons to warn of on-going trenching activities;
- (vii) Restrict construction vehicle movements to defined access roads and demarcated working areas (unless in the event of an emergency);
- (viii) Enforce strict speed limit (20-30 kmph) for plying on unpaved roads, construction tracks;
- (ix) Provide temporary traffic control (e.g., flagmen) and signs where necessary to improve safety and smooth traffic flow;
- (x) Where traffic is diverted around crossings, traffic control or careful selection of the exit from the working areas will be provided with the aim of ensuring that vehicles join the road in a safe manner;
- (xi) At sensitive locations particularly where there are schools and markets close to the road, awareness of safety issues will be raised through neighbourhood awareness meetings;
- (xii) All drivers and equipment operators will undergo safety training; and
- (xiii) Maintain regularly the construction equipment and vehicles; use manufacturer-approved parts to minimize potentially serious accidents caused by equipment malfunction or premature failure.

Safety Measures for Controlled blasting during excavation: Presence of sub-surface rock is envisaged in some of the project sites like headworks and along the alignment in the water supply improvement project for Madurai Municipal Corporation.. During excavation, alternatives like drilling and chiselling, controlled blasting etc will be examined and the suitable technology will be identified depending upon the site conditions. Wherever controlled blasting is proposed, the following measures shall be carried out for execution in a safe manner.

- (i) Carryout controlled blasting in consultation with PIU so that blasting activities with generating least impact are conducted during periods of the day which will result in least disturbance; especially near schools and other sensitive receptors
- (ii) The contractor shall submit a blasting plan in advance to PIU; and implement in accordance to the plan.
- (iii) Permission shall be obtained from The District Collector for controlled blasting for excavation and the conditions issued shall be complied with during implementation. For the initial stretches proposed totalling to about 3.2 km permission is obtained from The District Collector of Madurai.
- (iv) Blasting shall be done through an licensed Explosive Contractor only.
- (v) For controlled blasting, explosives including blasting caps, shall be transported to the blasting site only through exclusive vehicle in safe manner in accordance with the requirements of the blasting license. After blasting is over, the balance explosives shall be returned to the licensed storage.
- (vi) Cost for implementation of mitigation measures and liability are the responsibility of contractor.
- (vii) Proper prior notice will be issued to the Residents before Commencing project activity works Schedule
- (viii) Prior information will be given to Police Officials
- (ix) Workers (Flagman) shall be stationed on both end of roads to warn people before firing any blasts and not to permit the traffic.
- (x) When blasting, ample warning shall be given to all persons within the vicinity prior to blasting. Warning signs shall be erected a minimum of 24 hours prior to the blast time. The warning signs will state the time and date of each blast.
- (xi) Contractor shall ensure necessary precautions / protection (like excavated earth, sand-filled bags, etc) to reduce dust emissions and noise levels.
- (xii) Sites shall be provided with necessary shields all around.
- (xiii) Minimum explosive will be used for Control Blasting for residential areas.
- (xiv) After a blast has been fired, the Blast Control Specialist shall make a careful inspection to determine that all charges have exploded before employees are allowed to return to the operation..
- (xv) The contractor shall be responsible for any and all damages to property or injury to persons resulting from blasting or accidental or premature explosions that may occur in connection with use of explosives. The contractor shall do the activities after obtaining the blasting permission from District Collector, Madurai.
- (xvi) For the diversion of traffic in the blasting area, the contractor shall prepare a traffic management plan and obtain permission from Madurai Corporation and traffic police.

167. **Construction Camps.** Contractor may require to set up construction camps – for temporary storage of construction material (pipes, cement, steel, fixtures, fuel, lubricants, etc.), and stocking of surplus soil, and may include separate living areas for migrant workers. The contractor will however be encouraged to engage local workers as much as possible. Operation of work camps can cause temporary air, noise and water pollution, and may become a source of

conflicts, and unhealthy environment if not operated properly. Potential impacts are negative but short-term and reversible by mitigation measures. The construction contractor will be required to:

- (i) select a camp site away from residential areas (at least 100 m buffer shall be maintained) or locate the camp site within the existing facilities of City Corporation;
- (ii) avoid tree cutting for setting up camp facilities;
- (iii) provide a proper fencing/compound wall for camp sites;
- (iv) camp site shall not be located near (100 m) water bodies, flood plains flood prone/low lying areas, or any ecologically, socially, archeologically sensitive areas
- (v) separate the workers living areas and material storage areas clearly with a fencing and separate entry and exit;
- (vi) camp shall be provided with proper drainage, there shall not be any water accumulation;
- (vii) provide drinking water, water for other uses, and sanitation facilities for employees; drinking water should be regularly tested to confirm that drinking water standards are met;
- (viii) prohibit employees from cutting of trees for firewood; contractor should provide cooking fuel (cooking gas); firewood not allowed;
- (ix) train employees in the storage and handling of materials which can potentially cause soil contamination;
- (x) wastewater from the camps shall be disposed properly either into sewer system, if sewer system is not available, provide on-site sanitation with septic tank and soak pit arrangements (100 m away from surface water body or groundwater well);
- (xi) recover used oil and lubricants and reuse or remove from the site;
- (xii) manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas; provide a compost pit for biodegradable waste, and non-biodegradable / recyclable waste shall be collected and sold in local market;
- (xiii) remove all wreckage, rubbish, or temporary structures which are no longer required; and
- (xiv) at the completion of work, camp area shall be cleaned and restored to pre-project conditions and submit report to PIU; PIU to review and approve camp clearance and closure of work site.

C. Operation and Maintenance Impacts

168. The WTP plant is the source for generation of noise during operation. However, the residential units are located away from the WTP. High inside noise levels can affect the health of operators and staff at the facilities, and therefore, noise levels need to be maintained within and outside the plant at acceptable levels. To eliminate the issue, it is proposed to:

- (i) Procure good quality latest technology pumps that guarantee controlled noise at a level of around 80 dB (A) at a distance of 1m.
- (ii) Use appropriate building materials and construction techniques for WTP, which can absorb sound rather than reflect noise.
- (iii) Use acoustic enclosures – manufacturer certified for all pumps and motors.
- (iv) Procure only CPCB approved generators² to meet air emission and noise level requirements;

² Central Pollution Control Board (CPCB) has published Genset notifications, which includes specification for emission limits for new Diesel Engines (upto 800 kW) and Noise limits for Generator sets which runs with Diesel as Fuel type.
Emission limits for DG's

- (v) Provide sound mufflers for ventilators in the plant rooms; and soundproof doors; and
- (vi) Provide earplugs designated for noise reduction to workers working within the WTP, where the noise level will be within 80dB (A). Noise level will be limited to 45 dB (A) outside the WTP and at the boundary.

169. The main O&M activities of the proposed infrastructure will be detection and repair of leaks and pipe bursts. These are, however, likely to be minimal as proper design and selection of good quality pipe material should mean that leaks are minimal. Leak repair work will be similar to the pipe laying work as earlier explained. Trenches will be dug to reveal the leaking area and the faulty connection will be re-fitted, or the pipe will be removed and replaced if necessary.

170. **Recurrence of blockage and leakage problems.** Although impact is likely to be minimal due to new and well-designed efficient system; it should be ensured that leak detection and restoration time is minimized to the extent possible.

171. To ensure that water delivered to consumers at all times meets the drinking water standards, the following measures are suggested:

- (i) Preparation and implementation of a water quality surveillance as part of the project to ensure that supplied water meets the drinking water standards; and
- (ii) Surveillance program will be organized to ensure the water quality of the consumer water.

D. Cumulative Impact Assessment

172. The cumulative impact assessment (CIA) examined the interaction between the subproject's residual effects (i.e., those effects that remain after mitigation measures have been applied) and those associated with other past, existing and reasonably foreseeable future projects or activities. The interaction of residual effects associated with multiple projects and/or activities can result in cumulative impacts, both positive and negative. The subproject's potential cumulative effects were considered with respect to valued environmental components (VECs) in the categories of environmental, socio-economic, and heritage resources in four areas:

- (i) Of any potential residual project effects that may occur incrementally overtime;
- (ii) Consideration of other known relevant projects or activities within the specified study area boundaries, even if not directly related to the subproject;
- (iii) Potential overlapping impacts that may occur due to other developments, even if not directly related to the proposed project; and
- (iv) Future developments that is reasonably foreseeable and sufficiently certain to proceed.

173. The subproject IEE has identified the VECs as air quality, water (surface and groundwater) quality, noise, geophysical (hydrogeological), traffic management, social- economic and socio-

POWER RANGE	HC+ NO _x	CO	PM	SMOKE
		g/kWh		m ⁻¹
Up to 19 kW	7.5	3.5	0.3	0.7
>19 kW	4.7	3.5	0.3	0.7
Up to 75 kW				
>75 kW	4.0	3.5	0.2	0.7
Up to 800 kW				

Noise limit shall not exceed 75 dB (A) at 1 m distance.

The generators that are in line with the specifications shall be procured. The requirement for the same is specified in the BoQ that are to be monitored to ensure that generation of noise and potential deterioration of ambient air quality will be avoided.

community, and human health. There are no foreseeable projects that will overlap with the subproject.

174. Given the water supply requirement in Madurai municipal corporation will be met and the source from River Mullai periyar river at lower camp is considered adequate, there are no significant cumulative impacts expected on the future water supply.

175. Air quality effects will occur during construction. Consequently, although emissions of common air contaminants (CAC) and fugitive dust may be elevated in proximity to active work sites, this impact will be short-term and localized to the immediate vicinity of the alignment. Greenhouse Gas (GHG) emissions may increase as a result of project activities (i.e., vehicle and equipment operation, concrete production, disposal of excavated material, land filling of residual wastes). Given the subproject's relatively minor contribution to CAC and GHG emissions during construction, the overall significance rating of both these potential residual effects is considered to be negligible during construction.

176. During construction, noise levels in the immediate proximity of most work sites are expected to increase. The duration of this exposure will be relatively brief. This exposure represents a temporary, localized, adverse residual effect of low to moderate significance for affected receptors. Structural damage due to ground vibrations is unlikely; there may annoyance to spatially located receptors during construction. Noise levels associated with the project operations will be largely imperceptible as the service reservoirs are located in relatively small sites within the city proper.

177. Land use/traffic management concerns will occur spatially during construction. During construction, site-specific mitigation measures will be implemented to address temporary disruptions to land use and access in the vicinity of the alignment such as road and sidewalk closures, traffic delays and detours, parking modifications, and increased volumes of construction-related traffic. There should be improved traffic movement along the alignment once construction is completed. Since the subproject will be built in undeveloped land earmarked for service reservoirs purposes, it will not conflict with existing or planned land use. However, following improvement in infrastructures and services, added residential developments, commercial and business facilities and increased densities are expected to develop and enhance the subproject area. This can be considered a long-term cumulative benefit of the subproject.

178. Adverse impacts such as localized disruption of vehicle traffic and pedestrian movements in areas along the alignment, and elevated CAC and fugitive dust emissions in proximity to work sites, elevated noise and visual impacts will occur during construction. These short-term effects will be mitigated by providing alternate travel routes or alternating traffic movements and, where possible, access to businesses, schools and residences. However, upon completion of construction the socio-community will benefit from improved water supply system. This is considered a long-term cumulative benefit.

179. Development at the intake and water treatment plant sites and in the vicinity of the subproject may result in similar impacts relative to water quality and soils, but each impacts are independent of one another and are mitigated on a site-specific basis. Further, while water quality impacts have the ability to compound when taking into account regional water basins into consideration, the subproject will be required to adhere to the mandatory state and local laws, ordinances, regulations, and water quality standards. Regional geologic impacts do not generally compound, and are limited to the site at which they occur.

180. No adverse residual effects to human health will occur as a result of subproject construction or operation. While exposure to elevated noise levels and fugitive dust and CAC emissions will occur in proximity to subproject work sites during construction, due to their short-term, localized nature, these effects are expected to be minor and insignificant with no measurable effects on human health. During the subproject operation, the generation of wastewater / sewage will have a negative impact to the environment. However, it will be managed through the existing UGSS facility in Madurai Municipal Corporation, which is already covering 72 wards out 100 wards. For the remaining 28 wards, DPR is under preparation (which is in the advance stage). Hence, by implementing the same, Madurai Corporation shall have UGSS facility for the entire city (comprising 100 wards). The subproject operations will benefit the general public by contributing to the long-term improvement of water supply system and community livability in Madurai Municipal Corporation.

VI. PUBLIC CONSULTATION AND INFORMATION DISCLOSURE

A. Overview

181. The active participation of stakeholders including local community, NGOs, etc., in all stages of project preparation and implementation is essential for successful implementation of the project. It will ensure that the subprojects are designed, constructed, and operated with utmost consideration to local needs, ensures community acceptance, and will bring maximum benefits to the people. Public consultation and information disclosure is necessary as per the ADB policy.

182. Most of the main stakeholders have already been identified and consulted during preparation of this IEE, and any others that are identified during project implementation will be brought into the process in the future. Primary stakeholders of the subproject are residents, shopkeepers and businesspeople who live and work near sites where facilities will be built (OHT), government and utility agencies responsible for provision of various services in project area. Secondary stakeholder are NGOs and CBOs working in the area, community representatives, beneficiary community in general, government agencies, TNUFSL and Government of Tamil Nadu.

B. Public Consultation

183. The public consultation and disclosure program is a continuous process throughout the project implementation, including project planning, design and construction.

1. Consultation during Project Preparation

184. The subproject proposal is formulated by Madurai Municipal Corporation in consultation with the public representatives in the project area to suit their requirements and as per CPHEEO norms.

185. Focus-group discussions with the local public and other stakeholders were conducted to learn their views and concerns. General public and the people residing along the project activity areas were also consulted. A project area level consultation workshop was conducted with the public representatives and prominent citizens, NGOs etc., on 8 March 2018 at conference hall, 13 March 2018 at Uthamapalayam, 16 March 2018 at Pennycuick hall and 16 March 2018 at Collectors office. (Details are enclosed as Appendix 9). **Public consultations for Package 4 were held on 23.12.2020 & 24.12.2020. The locations were selected based on the presence of socially important locations consultation was held. The outcome of the consultation has been discussed in Appendix 16.**

186. A total of 37 OHT locations has been identified for water distribution under the “Dedicated Water Supply Scheme for Madurai Municipal Corporation from Mullai Periyar at Lower camp”. Out of 37 OHT’s, 24 OHT locations were identified for conducting public consultations, which was held from 13 to 15 February 2019. The locations were selected based on the presence of socially important locations including the public park area, playground, burial ground, temples, etc., consultation was held. The outcome of the consultation has been enclosed as Appendix 16.

187. It was observed that people are willing to extend their cooperation, as the proposed project will provide protected water supply for their households, which will enhance basic infrastructure service levels and overall living standard of the public. Also, they are expecting that the work should be implemented at the earliest. Public demanded for advance notice before construction and proper warning signs along the construction area to avoid inconvenience and the project

completed within the stipulated contract period. The road should be restored properly after the pipe laying work completed.

2. Consultation during construction

188. Prior to start of construction, PIU will conduct information dissemination sessions at various places and solicit the help of the local community, leaders/prominent for the project work. Focus group meetings, as required, will be conducted to discuss and plan construction work (mainly pipeline work) with local communities to reduce disturbance and other impacts and also regarding the project grievance redress mechanism. Project information and construction schedule will be provided to the public. A constant communication will be established with the affected communities to redress the environmental issues likely to surface during construction phase. Contractor will provide prior public information (in Tamil and English) about the construction work in the area, once 7 days prior to the start of work and again a day before the start of work via pamphlets (a sample public information template is provided in Appendix 8). At the work sites, public information boards will also be provided to disseminate project related information.

189. During construction stage of the project, dissemination programs were conducted at various locations of the Madurai Corporation. The dissemination included proposed distribution network, management measures followed, etc and details of the dissemination programs conducted are provided in the appendix 9.

C. Information Disclosure

190. Executive summary of the IEE will be translated in Tamil and made available at the offices of PMU and PIU and also displayed on their notice boards. Hard copies of the IEE will be accessible to citizens as a means to disclose the document and at the same time creating wider public awareness. Electronic version of the IEE in English and executive summary in Tamil will be placed in the official website of the TNUIFSL and Madurai Municipal Corporation after approval of the IEE by the ADB. Stakeholders will also be made aware of grievance register and redress mechanism.

191. Public information campaigns to explain the project details to a wider population will be conducted. Public disclosure meetings will be conducted at key project stages to inform the public of progress and future plans. Prior to start of construction, the PIU will issue notification on the start date of implementation in local newspapers. A board showing the details of the project will be displayed at the construction sites for the information of general public.

192. Local communities will be continuously consulted regarding location of construction camps, access and hauling routes and other likely disturbances during construction. The road closure together with the proposed detours will be communicated via advertising, pamphlets, radio broadcasts, road signage, etc.

VII. GRIEVANCE REDRESS MECHANISM

193. A common GRM will be in place to redress social, environmental or any other project related grievances. The GRM described below has been developed in consultation with stakeholders. Public awareness campaign will be conducted to ensure that awareness on the project and its grievance redress procedures is generated. The campaign will ensure that the poor, vulnerable and others are made aware of grievance redress procedures and entitlements per project entitlement matrix, and PMU and concerned PIU will ensure that their grievances are addressed.

194. Affected persons will have the flexibility of conveying grievances/suggestions by dropping grievance redress/suggestion forms in complaints/suggestion boxes or through telephone hotlines at accessible locations, by e-mail, by post, or by writing in a complaints register in Madurai Municipal Corporation offices. Madurai Municipal Corporations safeguards officer will have the responsibility for timely grievance redress on safeguards and gender issues and for registration of grievances, related disclosure and communication with the aggrieved party.

195. GRM provides an accessible, inclusive, gender-sensitive and culturally appropriate platform for receiving and facilitating resolution of affected persons' grievances related to the project. A two-tier grievance redress mechanism is conceived, one, at project level and another, beyond project level. For the project level GRM, a grievance redress cell (GRC) will be established in PIU/MMC; safeguards officer, supported by the Deputy Construction Manager, along with support Engineer – Construction management supervision consultant (CMSC) (non key expert) and social, gender and environmental safeguards of CMSC will be responsible for creating awareness among affected communities and help them through the process of grievance redress, recording and registering grievances of non-literate affected persons.

196. GRM aims to provide a time-bound and transparent mechanism to voice and resolve social and environmental concerns linked to the project. All grievances – major or minor, will be registered. Documentation of the name of the complainant, date of receipt of the complaint, address/contact details of the person, location of the problem area, and how the problem was resolved will be undertaken. Madurai Municipal Corporation will also be responsible for follow-through for each grievance, periodic information dissemination to complainants on the status of their grievance and recording their feedback (satisfaction/dissatisfaction and suggestions).

197. In case of grievances that are immediate and urgent in the perception of the complainant, the contractor, and supervision personnel of the CMSC and PIU will resolve the issue on site, and any issue that is not resolved at this level will be dealt at PIU head level for immediate resolution. Should the PIU fail to resolve any grievance within the stipulated time period, the unresolved grievances will be taken up at MCMC level. In the event that certain grievances cannot be resolved even at MCMC level., particularly in matters related to land purchase/acquisition, payment of compensation, environmental pollution etc., they will be referred to the Grievance Redress Committee (GRC) headed by the District Collector. Any issue which requires higher than district level inter-departmental coordination or grievance redress, will be referred to the State level Steering Committee.


198. GRC will meet every month (if there are pending, registered grievances), determine the merit of each grievance, and resolve grievances within specified time upon receiving the complaint-failing which the grievance will be addressed by the state-level Steering Committee. The Steering Committee will resolve escalated/unresolved grievances received.

199. **Composition of GRC.** GRC will be headed by the District Collector, and members include PIU head, Safeguards Officer of PIU, representative of TNPCB, one elected representative / prominent citizen from the area, and a representative of affected community. GRC must have a women member.

200. State level steering committee will include Commissioner of Municipal Administration as chair, member include managing directors of TNUIFSL, Chennai Metropolitan Water Supply and Sewerage Board, TWAD Board and others as necessary.

201. **Areas of Jurisdiction.** The areas of jurisdiction of the GRC, headed by the District Collector will be (i) all locations or sites within the district where subproject facilities are proposed, or (ii) their areas of influence within the District. The Steering Committee will have jurisdictional authority across the state (i.e., areas of influence of subproject facilities beyond district boundaries, if any).

202. The multi-tier GRM for the project is outlined below (Figure 19), each tier having time-bound schedules and with responsible persons identified to address grievances and seek appropriate persons' advice at each stage, as required. The GRC will continue to function throughout the project duration. The implementing agencies/ULBs shall issue notifications to establish the respective PIU level grievance redress cells, with details of composition, process of grievance redress to be followed, and time limit for grievance redress at each level.

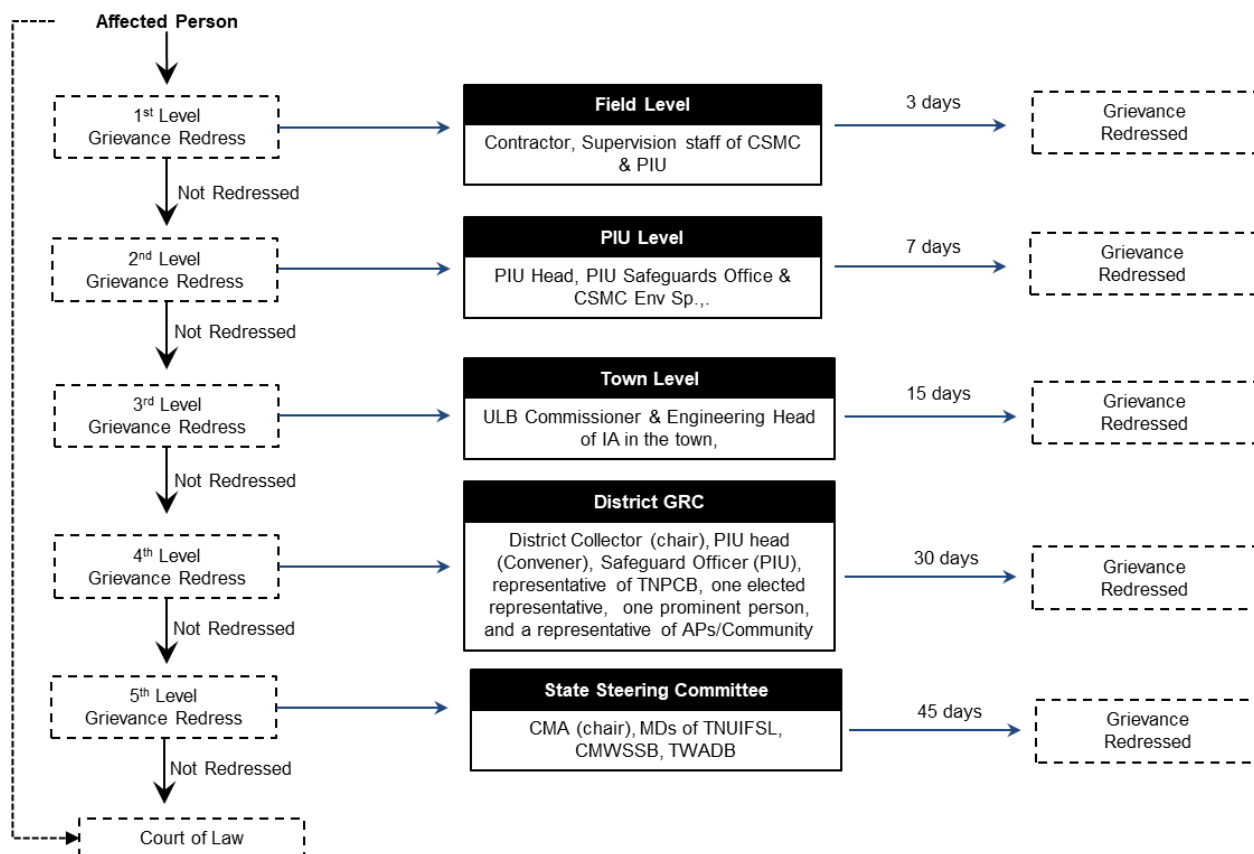Figure 21: Proposed TNUFIP Grievance Redress Mechanism

AP = affected person, CMA = Commissionerate of Municipal Administration, CMWSSB = Chennai Metropolitan Water Supply and Sewerage Board, CMSC = Construction, Management and Supervision Consultant, GRC = grievance redress committee, IA = implementing agency, PIU = Project Implementation Unit, TNUIFSL = Tamil Nadu Urban Infrastructure Financial Services Limited, TWADB = Tamil Nadu Water and Drainage Board, ULB = urban local body.

203. Recordkeeping. Records of all grievances received, including contact details of complainant, date the complaint was received, nature of grievance, agreed corrective actions and the date these were effected and final outcome will be kept by PIU in Madurai Municipal Corporation (with the support of CMSC) and submitted to PMU.

204. Information dissemination methods of the GRM. The PIU, assisted by CMSC will be responsible for information dissemination to affected persons and general public in the project area on grievance redress mechanism. Public awareness campaign will be conducted to ensure that awareness on the project and its grievance redress procedures is generated. The campaign will ensure that the poor, vulnerable and others are made aware of grievance redress procedures and entitlements per agreed entitlement matrix including, whom to contact and when, where / how to register grievance, various stages of grievance redress process, time likely to be taken for redress of minor and major grievances, etc. Grievances received and responses provided will be documented and reported back to the affected persons. The number of grievances recorded and resolved, and the outcomes will be displayed / disclosed in the PIU, offices, ULB notice boards and on the web, as well as reported in the semi-annual environmental and social monitoring

reports to be submitted to ADB. A Sample Grievance Registration Form has been attached in Appendix 3.

205. **Periodic review and documentation of lessons learned.** The PMU will periodically review the functioning of the GRM and record information on the effectiveness of the mechanism, especially on the PIU's ability to prevent and address grievances.

206. **Costs.** All costs involved in resolving the complaints (meetings, consultations, communication and reporting/information dissemination) will be borne by Madurai Municipal Corporation. Cost estimates for grievance redress are included in resettlement cost estimates.

207. **Country legal procedure.** An aggrieved person shall have access to the country's legal system at any stage, and accessing the country's legal system can run parallel to accessing the GRM and is not dependent on the negative outcome of the GRM.

208. **ADB's Accountability Mechanism.** In the event that the established GRM is not in a position to resolve the issue, the affected person also can use the ADB Accountability Mechanism through directly contacting (in writing) the Complaint Receiving Officer (CRO) at ADB headquarters or the ADB India Resident Mission. The complaint can be submitted in any of the official languages of ADB's developing member countries. Before submitting a complaint to the Accountability Mechanism, it is recommended that affected people make a good faith effort to resolve their problems by working with the concerned ADB operations department (in this case, the resident mission). Only after doing that, and if they are still dissatisfied, they could approach the Accountability Mechanism. The ADB Accountability Mechanism information will be included in the project-relevant information to be distributed to the affected communities, as part of the project GRM.

VIII. ENVIRONMENTAL MANAGEMENT PLAN

209. An EMP has been developed to provide mitigation measures to reduce all negative impacts to acceptable levels.

210. The EMP will guide the environmentally sound construction of the subproject and ensure efficient lines of communication between TNUIFSL, PMU, implementing agency, PIU, Consultants and Contractors. The EMP will (i) ensure that the activities are undertaken in a responsible non-detrimental manner; (ii) provide a pro-active, feasible and practical working tool to enable the measurement and monitoring of environmental performance on site (iii) guide and control the implementation of findings and recommendations of the environmental assessment conducted for the subproject; (iv) detail specific actions deemed necessary to assist in mitigating the environmental impact of the subproject; and (v) ensure that safety recommendations are complied with. The EMP includes a monitoring program to measure the environmental condition and effectiveness of implementation of the mitigation measures. It will include observations on- and off-site, document checks, and interviews with workers and beneficiaries.

211. The contractor will be required to submit to PIU/Madurai City Municipal Corporation, for review and approval, a site environmental management plan (SEMP) including (i) proposed sites/locations for construction work camps, storage areas, hauling roads, lay down areas, disposal areas for solid and hazardous wastes; (ii) specific mitigation measures following the approved EMP; and (iii) monitoring program as per SEMP. No works are allowed to commence prior to approval of SEMP.

212. A copy of the EMP/approved SEMP will be kept on site during the construction period at all times. The EMP included in the bid and contract documents to ensure compliance to the conditions set out in this document.

213. For civil works, the contractor will be required to (i) carry out all of the mitigation and monitoring measures set forth in the approved EMP; and (ii) implement any corrective or preventative actions set out in safeguards monitoring reports that the employer will prepare from time to time to monitor implementation of this IEE, EMP and SEMP. The contractor shall allocate budget for compliance with these IEE, EMP and SEMP measures, requirements and actions.

214. The following tables show the potential environmental impacts, proposed mitigation measures and responsible agencies for implementation and monitoring.

Table 51: Design Stage Environmental Impacts and Mitigation Measures

Field	Anticipated Impact	Mitigation Measures	Responsibility of Mitigation	Cost and Source of Funds
Water Treatment Plant	Deficient treatment due to substandard operation / system malfunction	<ul style="list-style-type: none"> (i) Design process to meet the Indian Standards for Drinking Water - Specification (IS 10500:2012). Ensuring continuous uninterrupted power supply. (ii) Providing operating manual with all standard operating procedures (SOPs) for operation and maintenance of the facility (iii) Necessary training to urban local body (ULB) staff dealing with water treatment plant (WTP). (iv) Extended contractor period for operations and maintenance (O&M), proper transfer of facility to ULB with adequate technical know-how on O&M and hands-on training to ULB staff 	Program implementation unit (PIU)	Project Costs
	Disposal of Sludge	<ul style="list-style-type: none"> (i) After drying, the dried sludge will be stored in stockyard within the WTP premises and it will be disposed periodically or in the area identified by the Madurai Municipal Corporation at a maximum distance of 30 km from WTP. (ii) The water from sludge drying bed under drain is recirculated into recirculation sump. The supernatant water from Sludge Thickener will be sent into re-circulation sump. The sludge shall be taken to the sludge balance tank and from there discharge to nearby drain. The filtrate will be re-circulated to the raw water distribution chamber 	PIU	Project Costs
	Storage of chemicals and other hazardous materials	<ul style="list-style-type: none"> (i) The separate place in the WTP site should be identified for the safe storage and handling of chemicals and other hazardous materials with proper display of requirements and marking as protected area. (ii) Providing specific appliances for safe working of personnel in critical areas like chlorination plant shall be ensured. 	PIU	Project Costs
	Reuse of Back wash water	The backwash water from proposed WTP should be stored within the premises for further recirculation. It helps to minimize the raw water demand. For reuse and recirculation of the backwash water, proper recirculation system should be installed in WTP.	PIU	Project Costs
	Risk and Safety	<ul style="list-style-type: none"> (i) Adopt the World Bank EHS guidelines related to occupational health and safety (refer https://www.ifc.org/wps/wcm/connect/e22c050048855ae0875cd76a6515bb18/Final%2B-%2BWater%2Band%2BSanitation.pdf?MOD=AJPERES) (ii) Use only liquid chlorine. Strictly, the chlorine gas will not be used in the water treatment plant. 	PIU	
	Distribution network - raw water main,	(i) Limit the depth wherever possible	PIU	Project Costs

Field	Anticipated Impact	Mitigation Measures	Responsibility of Mitigation	Cost and Source of Funds
clear water transmission main	contamination of water, occupation health and safety of workers, etc.	<ul style="list-style-type: none"> (ii) In unavoidable cases, where networks are to be laid close to storm water drains, appropriate pipe material shall be selected (stoneware pipes shall be avoided) (iii) For shallow depth and especially in narrow roads, use small inspection chambers; (iv) Ensure to conduct a pre-blasting survey through videography and photography of residential properties and other structures falling along the pipeline alignment to ascertain the prevailing conditions of the structures likely to be impacted by the controlled blasting and take adequate measures to minimize such impacts. 		
Over Head Tanks	Energy consumption	<ul style="list-style-type: none"> (i) Using low-noise and energy efficient pumping systems (ii) Efficient Pumping system operation (iii) Installation of Variable Frequency Drives (VFDs) 	PIU	Project Costs
Trees on Project Location	Tree cutting	<p>The trees present in the location are given in table 39 pg no. 43. However, during construction if any need arises, the following measures will be followed.</p> <ul style="list-style-type: none"> (i) Minimize removal of trees by adopting to site condition and with appropriate layout design/alignment, (ii) Obtain prior permission for tree cutting (iii) Plant and maintain 10 trees for each tree that is removed 	PIU	Project Costs

Table 52: Pre-Construction Stage Environmental Impacts and Mitigation Measures

Field	Anticipated Impact	Mitigation Measures	Responsible for Implementation	Cost and Source of Funds
Construction of check dam and Head works	Change of stream course due to diversion channels to construct intake structures and check dam	<ul style="list-style-type: none"> (i) No appreciable change to the river course shall occur due to diversion channel and intake structures & check dam should be constructed accordingly. (ii) The cofferdam will be provided for construction of check dam and head work without any disturbance of river water flow. 	Contractor / Program implementation unit (PIU)	Project Costs
	Impact on the aquatic environment/ ecology	<p>The check dam should be provided with Sluice gates (upstream and downstream of the shutters, smooth concrete bed apron should be provided to ensure that free flow occurs) through which the ecological flow in the river has to be maintained during the lean season.</p> <p>The sluice should act as a path for aquatic species including phytoplankton, zooplankton, fish species and reptiles</p>	Contractor / Program implementation unit (PIU)	Project Costs

Field	Anticipated Impact	Mitigation Measures	Responsible for Implementation	Cost and Source of Funds
	Protection of topsoil	Topsoil from the Head works site should be stored in stock piles and that can be used for gardening purposes at Head works site which will be an environmental enhancing measure	Contractor/ PIU	Project Costs
	Disposal of construction debris and excavated materials.	The contractor should make use of the excavated material and construction debris for service road construction purpose.	Contractor / PIU	Project Costs
	Downstream users (impacts arising due to cofferdams, etc.)	Ensure that the stream is not obstructed, affecting the downstream users due to cofferdams, etc.	Contractor / PIU	Project Costs
	Water quality in the source / water bodies	Establish the baseline water quality prior to initiation of construction and to be periodically monitored.	Contractor / PIU	Project Costs
	Restoring river bed / water source	After completion of work, ensure the restoring of river bed to its natural shape free from any debris or construction junk material that may obstruct the flow.	Contractor / PIU	
	Safety measures	i) Barricading of construction site/ trench locations at all times in a day with adequate signage. ii) Where loose soil is met with, shoring and strutting shall be provided to avoid collapse of soil. iii) The contractor shall supply all necessary safety appliances such as safety goggles, helmets, safety belts, earplugs, mask etc., to workers and staff.	Contractor / PIU	Project Costs
Construction of transmission lines including OHTs, WTP	Compensatory plantation of trees	There were no trees present in OHT sites, hence no tree cutting is involved. Compensatory plantation of atleast ten the number trees felled should be done in line with competent authority guidelines	Contractor / PIU	Project Costs
	Trees transplantation in WTP site	Total number of transplanted in WTP is 484 nos. In it 474 nos survived Detail given in Table 39.	Contractor / PIU	Project Costs
	Disposal of construction debris and excavated materials.	The Contractor shall identify the sites for debris disposal and should be finalized prior to start of the earthworks; taking into account the following a) The dumping does not impact natural drainage courses b) no endangered / rare flora is impacted by such dumping c) The dumping site should be located at least 1.0 km away Settlement area.	Contractor / PIU	Project Costs

Field	Anticipated Impact	Mitigation Measures	Responsible for Implementation	Cost and Source of Funds
		d) Dumping site should be located in nonresidential areas in the downwind side e) It should be located at least 100m from the designated forest land. f) Avoid disposal on productive land. g) Minimize the construction debris by balancing the cut and fill requirements.		
	Protection of top soil	The top soil to be protected and compacted after completion of work, where the pipelines run, including open lands and agricultural lands.	Contractor	Project Costs
	Safety Aspects	(i) Adequate precautions shall be taken to prevent the accidents and from the machineries. All machines used shall conform to the relevant Indian standards Code and shall be regularly inspected by the PIU. (ii) Adequate precautions shall be taken while carrying out excavation, laying pipelines, operation of machinery near the power transmission towers and lines. Safety clearance requirements shall be met with. (iii) Labourers shall be periodically trained for the safety precautions for working near the power transmission lines. (iv) Emergency contact numbers shall be made available at the place of work. (v) Where loose soil is met with, shoring and strutting shall be provided to avoid collapse of soil. (vi) Protective footwear and protective goggles should be provided to all workers employed on mixing of materials like cement, concrete etc. (vii) Welder's protective eye-shields shall be provided to workers who are engaged in welding works. (viii) Earplugs shall be provided to workers exposed to loud noise, and workers working in crushing, compaction, or concrete mixing operation. (ix) The contractor shall supply all necessary safety appliances such as safety goggles, helmets, safety belts, earplugs, mask etc., to workers and staffs. (x) The contractor will make sure that during the construction work all relevant provisions of the Factories Act, 1948 and	Contractor	Project Costs

Field	Anticipated Impact	Mitigation Measures	Responsible for Implementation	Cost and Source of Funds
		<p>the Building and other Construction Workers (regulation of Employment and Conditions of Services) Act, 1996 are adhered to.</p> <p>(xi) The contractor shall not employ any person below the age of 14 years for any work and no woman will be employed on the work of painting with products containing lead in any form.</p> <p>(xii) The contractor shall comply, Explosives Rules, 2008 during earthwork excavation where hard rocks are met. Guidelines mentioned in appendix – 17.</p>		
Batching and Crusher plant	Setting up of Batching and Crushers Plant,	<p>i) Hot mix plants, crushers and ready-mix concrete batching plants shall be located at least 500 m away from the nearest habitation.</p> <p>ii) Contractor shall obtain NOCs / Consent to Establishment & Operate the plants from the Tamil Nadu State Pollution Control Board (TNPCB) and submit a copy to the PIU.</p> <p>iii) Specifications of hot mix plants and batching plants, other construction vehicles, equipment and machinery to be procured will comply to the relevant Bureau of Indian Standard (BIS) norms and with the requirements of the relevant current emission control legislations</p>	Contractor	Project Costs
	Water for construction	<p>(i) The contractor should source the requirement of water preferentially from surface water bodies, such as rivers and tank in the project area. Boring of any tube wells are prohibited. To avoid disruption / disturbance to other water users, the contractor should extract water from fixed locations.</p> <p>(ii) Only at locations where surface water sources are not available, the contractors can contemplate extraction of groundwater. Consent from the PIU engineer that no surface water resource is available in the immediate area for the project is a pre – requisite prior to extraction of groundwater. The contractor must need to comply with the requirements of the State Groundwater Department and seek their approval for doing so.</p> <p>(iii) The use of surface water by the contractor should be allowed only after written permission/consent of the</p>	Contractor	Project cost

Field	Anticipated Impact	Mitigation Measures	Responsible for Implementation	Cost and Source of Funds
		community/panchayat/ owner indicating the quantum of water allowed to be drawn.		
Sources of Materials	Extraction of materials can disrupt natural land contours and vegetation resulting in accelerated erosion, disturbance in natural drainage patterns, ponding and water logging, and water pollution.	<ul style="list-style-type: none"> (i) Obtain construction materials only from government approved quarries with prior approval of PIU (ii) PIU to review, and ensure that proposed quarry sources have all necessary clearances/ permissions in place prior to approval (iii) Contractor to submit to PIU on a monthly basis documentation on material obtained from each source (quarry/ borrow pit) (iv) Avoid creation of new borrow areas, quarries etc., for the project; if unavoidable, contractor to obtain all clearances and permissions as required under law, including Environmental Clearance (EC) prior to approval by PIU 	Contractor to prepare list of approved quarry sites and sources of materials with the approval of PIU	Project cost
	Identification and selection of Quarries	<ul style="list-style-type: none"> (i) The contractor should source materials (like gravel, aggregates) from existing licensed quarries with the suitable materials for construction. (ii) Apart from approval of the quality of the quarry materials, the engineer's (PIU) representative will verify the legal status of the quarry operation, as to whether approval under Mining Department is obtained. 	Contractor in coordination with PIU	Project cost

Field	Anticipated Impact	Mitigation Measures	Responsible for Implementation	Cost and Source of Funds
	Sand	The contractor will identify sand quarries with requisite approvals for the extraction of sand under Tamil Nadu Minor Minerals Concession Rules, 1959 (Corrected upto 31.3.2001 or latest) for use in the project.	Contractor in coordination with PIU	Project cost
Controlled blasting	Ground vibrations Noise (airblast) Flying debris Dust	<p>For the safety of humans and the structures within the area influenced by the blasting, the vibrations related impacts would be addressed by designing the blast charge by complying with the provisions elaborated in the applicable Indian regulations and standards.</p> <p>All records shall be maintained by the Contractors and PIU.</p> <p>An emergency response system shall be developed at the site level to address the situations emerging due to accidents or any other unfortunate incidents pertaining to human and structure safety. Training related to controlled blasting activity will be included in the overall safeguards training programme meant for PIUs and Contractors.</p> <p>The project staff from the PIU, consultants and contractors would undertake a pre-blasting survey of structures (including videography and/or photography) lying within the area of influence of blasting from the vibrations related impacts (preferably in the presence of the owners of the said structures) to assess and/or ascertain regarding the prevailing conditions of the structures prior to blasting activities. Based on the assessment, the Project staff would consider necessary measures to avoid, minimize or mitigate such impacts.</p>	Contractor and PIU	Contractor costs
Submission of updated EMP / SEMP; EMP implementation and reporting	Unsatisfactory compliance to EMP	<ul style="list-style-type: none"> (i) Appoint EHS Supervisor by CMSC to ensure EMP implementation (ii) Submission of updated EMP/ SEMP (iii) Timely submission monthly of monitoring reports including documentary evidence on EMP implementation such as photographs 	Contractor	Contractor cost

Field	Anticipated Impact	Mitigation Measures	Responsible for Implementation	Cost and Source of Funds
Utilities	Telephone lines, electric poles and wires, water lines within proposed project area	(i) Identify and include locations and operators of these utilities in the detailed design documents to prevent unnecessary disruption of services during construction phase; and (ii) Require construction contractors to prepare a contingency plan to include actions to be taken in case of unintentional interruption of services.	Contractor & PIU	Project cost
Construction work camps, stockpile areas, storage areas, and disposal areas.	Conflicts with local community; disruption to traffic flow and sensitive receptors	(i) Prioritize areas within or nearest possible vacant space in the project location; (ii) If it is deemed necessary to locate elsewhere, consider sites that will not promote instability and result in destruction of property, vegetation, irrigation, and drinking water supply systems; (iii) Do not consider residential areas; (iv) Take extreme care in selecting sites to avoid direct disposal to water body, which will inconvenience the community. (v) For excess spoil disposal, ensure (a) site shall be selected preferably from barren, infertile lands. In case agricultural land needs to be selected, written consent from landowners (not lessees) will be obtained; (b) debris disposal site shall be at least 200 m away from surface water bodies; (c) no residential areas shall be located within 100 m downwind side of the site; and (d) site is minimum 100 m away from sensitive locations like settlements, ponds/lakes or other water bodies.	Contractor to finalize locations in consultation and approval of PIU	Contractor cost
Consents, permits, clearances, NOCs, etc.	Failure to obtain necessary consents, permits, NOCs, etc. can result to design revisions and/or stoppage of works	(i) Obtain all necessary consents, permits, clearance, NOCs, etc. prior to award of civil works. (ii) Ensure that all necessary approvals for construction to be obtained by contractor are in place before start of construction (iii) Acknowledge in writing and provide report on compliance all obtained consents, permits, clearance, NOCs, etc.	Contractor and PIU	Cost of obtaining all consents, permits, clearance, NOCs, etc. prior to start of civil works responsibility of PIU

Field	Anticipated Impact	Mitigation Measures	Responsible for Implementation	Cost and Source of Funds
Chance finds	Damage / disturbance to artifacts	<ul style="list-style-type: none"> (i) Construction contractors to follow these measures in conducting any excavation work (ii) Create awareness among the workers, supervisors and engineers about the chance finds during excavation work (iii) Stop work immediately to allow further investigation if any finds are suspected; (iv) Inform Archeological Survey of India / State Archaeological Department if a find is suspected and taking any action they require to ensure its removal or protection in situ. 	Contractor and PIU	Contractor cost
Works in proposed area	Degradation of water quality due to entry of silt laden runoff	<ul style="list-style-type: none"> (i) No earthworks should be conducted during the monsoon season in general, and in particular no earth work to be conducted in subproject areas during monsoon season (ii) Stockpiled material and earth/soil shall be properly covered with tarpaulins; bunds, silt traps/fences, etc., (iii) Install temporary silt traps or sedimentation basins along the drainage leading to the water bodies; it shall be ensured that no silt laden runoff or traces of fuels, lubricants or chemicals used in construction drains into any public areas. (iv) Place storage areas for fuels and lubricants away from any drainage leading to water bodies; (v) Store fuel, construction chemicals etc., on an impervious floor, also avoid spillage by careful handling; provide spill collection sets for effective spill management (vi) No workers camp sites, storage areas etc., will not be located close to the wetland (< 1 km). 	Contractor and PIU	Project cost
Temporary economic impacts	Disruption to vendors, hawkers on ROW during sewer laying works	<ul style="list-style-type: none"> (i) Contractor is required to provide notice to the shop owners of the need to shift kiosk/wares displayed on ROW as soon as the work plan is ready, with minimum 7 working days. (ii) No works can be commenced unless 100% shifted in sections ready for implementation. 	Contractor and PIU	Project cost

Table 53: Construction Stage Environmental Impacts and Mitigation Measures

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
Air Quality	Dust, emissions from construction vehicles, equipment, and machinery used for installation of pipelines resulting to dusts and increase in concentration of vehicle-related pollutants such as carbon monoxide, sulfur oxides, particulate matter, nitrous oxides, and hydrocarbons.	<p>For all construction works</p> <ul style="list-style-type: none"> (i) Provide a dust screen (6m high) around the construction sites (ii) Damp down the soil and any stockpiled material on site by water sprinkling;(3-4 times a day - before the start of work, 1-2 times in between, and at the end of the day); when working in the roads there should permanently be one person responsible for directing when water sprinkling needs to take place to stop the dust moving; (iii) Reduce the need to sprinkle water by stabilizing surface soils where loaders, support equipment and vehicles will operate by using water and maintain surface soils in a stabilized condition (iv)Apply water prior to leveling or any other earth moving activity to keep the soil moist throughout the process (v) Cover the soil stocked at the sites with tarpaulins, and surround by dust screens. (vi)Control access to work area, prevent unnecessary movement of vehicle, public trespassing into work areas; limiting soil disturbance will minimize dust generation (vii)Use tarpaulins to cover the loose material (soil, sand, aggregate etc.) when transported by open trucks; minimize the drop height when moving the excavated soil. (viii)Control dust generation while unloading the loose material (particularly aggregate, sand, soil) at the site by sprinkling water and unloading inside the barricaded area (ix) Ensure that adequate cover is provided to prevent emission of dust during controlled blasting. (x) Clean wheels and undercarriage of haul trucks prior to leaving construction site (xi)Ensure that all the construction equipment, machinery are fitted with pollution control devises, which are operating correctly, and have a valid pollution under control (PUC) certificate <p>For pipe laying works</p> <ul style="list-style-type: none"> (i) Barricade the construction area using hard barricades (of 2 m height) on both sides (ii) Initiate site clearance and excavation work only after barricading of the site is done 	Contractor	Project Cost

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
		<ul style="list-style-type: none"> (iii) Confine all the material, excavated soil, debris, equipment, machinery (excavators, cranes etc.), to the barricaded area (iv) Ensure that adequate cover is provided to the trenches to prevent emission of dust during controlled blasting. (v) Limit the stocking of excavated material at the site; remove the excess soil from the site immediately to the designated disposal area (vi) Undertake the work section wise: a 500 m section should be demarcated and barricaded; open up several such sections at a time, but care shall be taken to locate such sections in different zones (vii) Conduct work sequentially - excavation, Pipe laying, backfilling; testing section-wise (for a minimum length as possible) so that backfilling, stabilization of soil can be done. (viii) Remove the excavated soil of first section to the disposal site; as the work progresses sequentially, by the time second section is excavated, the first section will be ready for back filling, use the freshly excavated soil for back filling, this will avoid stocking of material, and minimize the dust. (ix) Backfilled trench at any completed section after removal of barricading will be the main source of dust pollution. The traffic, pedestrian movement and wind will generate dust from backfilled section. Road restoration shall be undertaken immediately. (ix) Immediately consolidate the backfilled soil and restore the road surface; if immediate road restoration is not possible, provide a layer of plain cement concrete (PCC) of suitable mix on the backfilled trench so that dust generation, erosion is arrested and it will also provide a smooth riding surface for the traffic until the road is properly restored. Backfilled trench without any road restoration is a major source of dust. (x) For sections involving controlled blasting, ensure that dust curtains of adequate height are provided to the trenches to prevent emission of dust during drilling for charge holes and controlled blasting. (xi) Ensure that the excavated soil and debris along the section identified for blasting is sprinkled with adequate water prior to blasting to reduce dust emissions upon explosion of charge placed for breaking the hard rock; 		
Removal of rock during excavation	Impacts due to the controlled blasting and	(i) During excavation for works, wherever removal of rock is identified, alternatives like drilling and chiselling, controlled blasting etc will be examined and the suitable technology shall be finalised depending	Construction Contractor	Cost for implementation of mitigation

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
	associated activities	<p>upon the site conditions. Following measures for ensuring safety shall be ensured during controlled blasting.</p> <ul style="list-style-type: none"> (ii) Carryout controlled blasting in consultation with PIU so that blasting activities with the least potential to generate impacts are conducted during periods of the day which will result in least disturbance; especially near schools and other sensitive receptors. (iii) Permission shall be obtained from The District Collector for controlled blasting for excavation. Conditions stipulated in the permission issued by the District Collector shall be complied with during implementation. (iv) The contractor shall submit a blasting plan in advance to PIU; and implement in accordance to the plan. (v) Blasting shall be done through an licensed Explosive Contractor only (vi) For controlled blasting, explosives including blasting caps shall be transported to the blasting site only through exclusive vehicle in safe manner in accordance with the requirements of the blasting license. After blasting is over, the balance explosives shall be returned to the licensed storage. (vii) Cost for implementation of mitigation measures and liability are the responsibility of contractor. (viii) Proper prior notice will be issued to the Residents before Commencing project activity works Schedule (ix) Proper information will be Given to Police Officials (x) Workers (Flagman) shall be stationed on both end of roads to warn people before firing any blasts and not to permit the traffic. (xi) When blasting, ample warning shall be given to all persons within the vicinity prior to blasting. Warning signs shall be erected a minimum of 24 hours prior to the blast time. The warning signs will state the time and date of each blast. (xii) Contractor shall ensure necessary precautions / protection (like excavated earth, sand-filled bags, etc) to reduce noise levels, etc., Sites shall be provided with necessary shields all around. (xiii) Minimum Explosive will be used for Control Blasting for Residential areas (xiv) After a blast has been fired, the Blast Control Specialist shall make a careful inspection to determine that all charges have exploded before employees are allowed to return to the operation. 		measures responsibility of contractor.

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
		<p>(xv) The contractor shall be responsible for any and all damage to property or injury to persons resulting from blasting or accidental or premature explosions that may occur in connection with his use of explosives.</p> <p>(xvi) The contractor shall do the activities after obtaining the blasting permission from District Collector, Madurai.</p> <p>(xvii) For the diversion of traffic in the blasting area, the contractor shall prepare a traffic management plan and obtain permission from Madurai Corporation and traffic police.</p> <p>(xviii) Ensure to conduct a pre-blasting survey through videography and photography of residential properties and other structures falling along the sewerage alignment to ascertain the d prevailing conditions of the structures likely to be impacted by the controlled blasting and take adequate measures to minimize such impacts.</p>		
Surface water quality	<p>Mobilization of settled silt materials, and chemical contamination from fuels and lubricants during construction can contaminate nearby surface water quality.</p> <p>Ponding of water in the pits / foundation excavations</p>	<p>(i) All earthworks be conducted during the dry season to prevent the problem of soil/silt run-off during rains</p> <p>(ii) Avoid stockpiling of earth fill especially during the monsoon season unless covered by tarpaulins or plastic sheetsdo not stock earth/material close to water bodies (at least 100 m)</p> <p>(iii) Prioritize re-use of excess spoils and materials in the construction works. If spoils will be disposed, only designated disposal areas shall be used;</p> <p>(iv) Install temporary silt traps, oil traps, or sedimentation basins along the water leading to the water bodies; it shall be ensured that no silt laden runoff or traces of fuels, lubricants or chemicals used in construction drains into nearby water bodies.</p> <p>(v) Place storage areas (with impermeable surface) for fuels and lubricants away from any drainage leading to water bodies; these should be at least 100 m away from water bodies and groundwater wells)</p> <p>(vi) Store fuel, construction chemicals etc., on an impervious floor, also avoid spillage by careful handling; provide spill collection sets for effective spill management</p> <p>(vii) Dispose any wastes generated by construction activities in designated sites;</p> <p>(viii) Conduct surface quality inspection according to the Environmental Monitoring Plan (Table 50&51).</p>	Contractor	Project Cost

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
	Water accumulation in trenches/pits	<ul style="list-style-type: none"> (i) As far as possible control the entry of runoff from upper areas into the excavated pits, and work area by creation of temporary drains or bunds around the periphery of work area (ii) Pump out the water collected in the pits / excavations to a temporary sedimentation pond; dispose off only clarified water into drainage channels/streams after sedimentation in the temporary ponds (iii) Consider safety aspects related to pit collapse due to accumulation of water 	Contractor	Project Cost
Noise Levels	Increase in noise level due to earth-moving and excavation equipment, and the transportation of equipment, materials, and people.	<ul style="list-style-type: none"> (i) Plan activities in consultation with PIU so that activities with the greatest potential to generate noise are conducted during periods of the day which will result in least disturbance especially near schools and other sensitive receptors (ii) Minimize noise from construction equipment by using vehicle silencers, fitting jackhammers with noise-reducing mufflers, and use portable street barriers to minimise sound impact to surround sensitive receptor; and (iii) Maintain maximum sound levels not exceeding 70 decibels (dB(A)) when measured at a distance of 10 m or more from the vehicle/s. (iv) Identify any buildings at risk from damage and avoiding any use of pneumatic drills or heavy vehicles in the vicinity; if any building at risk, structural survey be completed prior to work, to provide baseline in case any issues, and if building is structurally unsound that measures taken to avoid any further damage. (v) Horns should not be used unless it is necessary to warn other road users or animals of the vehicle's approach; (vi) Consult local communities in advance of the work to identify and address key issues, and avoid working at sensitive times, such as night times religious and cultural festivals. 	Contractor	Project Cost
Controlled blasting	Noise (airblast) Flying debris Dust	<p>Carryout controlled blasting in consultation with PIU so that blasting activities are conducted during periods of the day which will result in least disturbance; especially near schools and other sensitive receptors.</p> <p>The contractor shall submit a blasting plan in advance to PIU for approval; and implement in accordance to the plan once approved.</p> <p>The controlled blasting at identified locations shall be permitted only after the requisite statutory permissions from regulatory authorities are obtained. The</p>	Contractor and PIU	Contractor Costs

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
		<p>contractor shall comply with all terms and conditions stipulated in such permissions. The controlled blasting would be monitored by following the necessary requirements to prevent safety risk to both public and nearby structures as provisioned in the prevailing Indian regulations and standards.</p> <p>Blasting shall be carried out through a licensed Explosive Contractor only.</p> <p>For controlled blasting, explosives including blasting caps, shall be transported to the blasting site only through exclusive vehicle in safe manner in accordance with the requirements of the blasting license. After blasting is over, the balance explosives shall be returned to the licensed storage.</p> <p>Cost for implementation of mitigation measures and liability are the responsibility of contractor.</p> <p>Proper prior notice will be issued to the residents before commencing blasting activity works. Inform the residents likely to be affected by the works in the locality about the upcoming blasting works well in advance so that necessary arrangements are planned by the residents with reduced inconvenience.</p> <p>For sections where the controlled blasting is proposed, the residents shall be provided with the schedule of blasting at least three days in advance and the residents are explained about the preventive, precautionary, mitigation and emergency response measures being taken to address their concerns.</p> <p>Prior information will be given to Police Officials</p> <p>Workers (Flagman) shall be stationed on both end of roads to warn people before firing any blasts and not to permit the traffic. The section proposed for blasting shall be supervised by properly trained staff to ensure no movement of pedestrians, motorized or nonmotorized vehicles, and residents takes place during blasting within the area of influence. For the diversion of traffic in the blasting area, the contractor shall prepare a traffic management plan and obtain permission from Madurai Municipal Corporation and traffic police.</p> <p>When blasting, ample warning shall be given to all persons within the vicinity prior to blasting. Warning signs shall be erected a minimum of 24 hours prior to the blast time. The warning signs will state the time and date of each blast.</p>		

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
		<p>Sites shall be provided with necessary shields all around.</p> <p>Minimum explosive will be used for Controlled Blasting specifically within residential areas.</p> <p>After a blast has been fired, the Blast Control Specialist shall make a careful inspection to determine that all charges have exploded before employees are allowed to return to the operation, and subsequently the movement of residents /pedestrians and vehicles is permitted.</p> <p>Ensure appropriate measures are taken to maintain maximum ambient noise levels within the limits as permitted by the prevailing Indian regulations and standards. The ambient noise levels would be monitored to ascertain the efficacy of acoustic measures thus implemented and compliance with associated regulatory permissions.</p> <p>Ensure that adequate precautions are taken to avoid flying debris post blasting (such as covering the trench with sturdy metallic sheets with sand filled bags to absorb the blast waves);</p> <p>For sections involving controlled blasting, ensure that dust curtains of adequate height are provided to the trenches to prevent emission of dust during drilling for charge holes and controlled blasting.</p> <p>Ensure that the excavated soil and debris along the section identified for blasting is sprinkled with adequate water prior to blasting to reduce dust emissions upon explosion of charge placed for breaking the hard rock.</p> <p>The project staff from the PIU, consultants and contractors would undertake a post-blasting survey of structures (including videography and/or photography) lying within the area of influence of blasting from the impacts (preferably in the presence of the owners of the said structures) to assess and/or ascertain regarding the damages, if any, caused to the structures because of blasting activities.</p> <p>The contractor shall be responsible for any and all damages to property or injury to persons resulting from blasting or accidental or premature explosions that may occur in connection with use of explosives. The log of such events</p>		

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
		<p>would be properly maintained. The contractor shall provide immediate support and relief measures commensurate with the damages.</p> <p>Training related to controlled blasting activity will be included in the overall safeguards training programme meant for PIUs and Contractors.</p>		
Landscape and aesthetics – waste generation	Impacts due to excess excavated earth, excess construction materials, and solid waste such as removed concrete, wood, packaging materials, empty containers, spoils, oils, lubricants, and other similar items.	<ul style="list-style-type: none"> (i) Prepare and implement a Construction Waste Management Plan (refer Appendix 4) (ii) As far as possible utilize the debris and excess soil in construction purpose, for example for raising the ground level or construction of access roads etc., (iii) Avoid stockpiling any excess spoils at the site for long time. Excess excavated soils should be disposed off to approved designated areas immediately (iv) If disposal is required, the site shall be selected preferably from barren, infertile lands; sites should be located away from residential areas, forests, water bodies and any other sensitive land uses (v) Domestic solid wastes should be properly segregated in biodegradable and non-biodegradable for collection and disposal to designated solid waste disposal site; create a compost pit (with impermeable bottom and sides) at workers camp sites for disposal of biodegradable waste; non-biodegradable / recyclable material shall be collected separately and sold in the local recycling material market (vi) Residual and hazardous wastes such as oils, fuels, and lubricants shall be disposed off via licensed (by TNPCB) third parties; (vii) Prohibit burning of construction and/or domestic waste; (viii) Ensure that wastes are not haphazardly thrown in and around the project site; provide proper collection bins and create awareness to use the dustbins recycle waste material where possible. (ix) Conduct site clearance and restoration to original condition after the completion of construction work; PIU to ensure that site is properly restored prior to issuing of construction completion certificate. 	Contractor	Project Cost
Accessibility and traffic disruptions	Traffic problems and conflicts near project locations and haul road	<p>Pipe laying works</p> <ul style="list-style-type: none"> (i) Prepare a pipe laying work implementation plan in each zone separately and undertake the work accordingly; ensure that for each road where the work is being undertaken there is an alternative road for the traffic diversion; take up the work in sequential way so that public 	Contractor	Project Cost

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
		<p>inconvenience is minimal; prepare traffic management plans for each section (refer sample in Appendix 5)</p> <p>(ii) Plan the pipe laying work in coordination with the traffic police; provide temporary diversions, where necessary with clear signage and effectively communicate with general public</p> <p>(iii) Avoiding conducting work in all roads in a colony at one go; it will render all roads unusable due to excavations at the same time, creating large scale inconvenience</p> <p>(iv) Undertake the work section wise: a 100m section should be demarcated and barricaded; open up several such sections at a time, but care shall be taken to locate such sections in different zones</p> <p>(v) Confine work areas in the road carriageway to the minimum possible extent; all the activities, including material and waste/surplus soil stocking should be confined to this area. Proper barricading should be provided; avoid material/surplus soil stocking in congested areas – immediately removed from site/ or brought to the as and when required</p> <p>(vi) Limit the width of trench excavation as much as possible by adopting best construction practices; adopt vertical cutting approach with proper shoring and bracing; this is especially to be practiced in narrow roads and deeper excavation; if they deep trenches are excavated with slopes, the roads may render completely unusable during the construction period</p> <p>(vii) Leave spaces for access between mounds of soil to maintain access to the houses / properties; access to any house or property shall not be blocked completely; alternative arrangements, at least to maintain pedestrian access at all times to be provided</p> <p>(viii) Provide pedestrian access in all the locations; provide wooden/metal planks with safety rails over the open trenches at each house to maintain the access.</p> <p>(ix) Inform the affected local population about the work schedule a week before, and a day before to start of work</p> <p>(x) Plan and execute the work in such a way that the period of disturbance/ loss of access is minimum.</p> <p>(xi) Keep the site free from all unnecessary obstructions;</p> <p>(xii) Notify affected public-by-public information notices, providing signboards informing nature and duration of construction works and contact numbers for concerns/complaints.</p>		

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
		<p>(xiii)At work site, public information/caution boards shall be provided including contact for public complaints</p> <p>Controlled blasting</p> <p>(i) The contractor shall submit a blasting plan in advance to PIU; and implement in accordance to the plan.</p> <p>(ii) Proper prior notice will be issued to the Residents before Commencing activity works Schedule</p> <p>(iii) Proper information will be Given to Police Officials</p> <p>(iv) Workers (Flagman) shall be stationed on both end of roads to warn people before firing any blasts and not to permit the traffic.</p> <p>(v) When blasting, ample warning shall be given to all persons within the vicinity prior to blasting. Warning signs shall be erected a minimum of 24 hours prior to the blast time. The warning signs will state the time and date of each blast.</p> <p>(vi) For the diversion of traffic in the blasting area, the contractor shall prepare a traffic management plan and obtain permission from respective local bodies/ Madurai Corporation and traffic police.</p> <p>Hauling (material, waste/debris and equipment) activities</p> <p>(i) Plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites</p> <p>(ii) Schedule transport and hauling activities during non-peak hours (peak hours 7 to 10 AM and 4 to 7 PM);</p> <p>(iii) Locate entry and exit points in areas where there is low potential for traffic congestion;</p> <p>(iv) Drive vehicles in a considerate manner</p> <p>(v) Notify affected public by public-information notices, providing sign boards informing nature and duration of construction works and contact numbers for concerns/complaints.</p>		
EMP Implementation Training	Irreversible impact to the environment, workers, and community	(i) Project manager and all key workers will be required to undergo training on EMP implementation including spoils/waste management, Standard operating procedures (SOP) for construction works; occupational health and safety (OH and S), core labor laws, applicable environmental laws, etc.	Contractor	Contractor cost
Socio-Economic	Loss of income	(i) Inform all businesses and residents about the nature and duration of any work well in advance so that they can make necessary preparations;	Contractor	Contractor cost

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
Loss of access to houses and business		<ul style="list-style-type: none"> (ii) Do not block any access; leave spaces for access between barricades/mounds of excavated soil and other stored materials and machinery, and providing footbridges so that people can crossover open trenches (iii) Barricade the construction area and regulate movement of people and vehicles in the vicinity, and maintain the surroundings safely with proper direction boards, lighting and security personnel – people should feel safe to move around (iv) Control dust generation (v) Immediately consolidate the backfilled soil and restore the road surface; this will also avoid any business loss due to dust and access inconvenience of construction work. (vi) Employee best construction practices, speed up construction work with better equipment, increase workforce, etc., in the areas with predominantly commercial, and with sensitive features like hospitals, and schools; (vii) Consult businesses and institutions regarding operating hours and factoring this in work schedules; and (viii) Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints. 		
Socio-Economic – Employment	Generation of temporary employment and increase in local revenue	<ul style="list-style-type: none"> (i) Employ local labour force as far as possible (ii) Comply with labor laws 	Contractor	Contractor cost
Occupational Health and Safety	Occupational hazards which can arise during work	<ul style="list-style-type: none"> (i) Follow all national, state and local labour laws (indicative list is in Appendix 2); (ii) Develop and implement site-specific occupational health and safety (OH and S) Plan which shall include measures such as: (a) safe and documented construction procedures to be followed for all site activities; (b) ensuring all workers are provided with and use personal protective equipment; (c) OH and S Training for all site personnel, (d) excluding public from the work sites; and (e) documentation of work-related accidents; Follow International Standards such as the World Bank Group's Environment, Health and Safety Guidelines and for controlled blasting activity, identify the risks involved for the labourers and public and include measures in the OHS plan. Provide 	Contractor	Contractor cost

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
		<p>necessary training and PPEs to the labourers to ensure safety during implementation.</p> <ul style="list-style-type: none"> (iii) Ensure that qualified first-aiders are available at all times. Equipped first-aid stations shall be easily accessible throughout the sites; (iv) Secure all installations from unauthorized intrusion and accident risks (v) Provide H and S orientation training to all new workers to ensure that they are apprised of the basic site rules of work at the site, personal protective protection, and preventing injuring to fellow workers; (vi) Provide visitor orientation if visitors to the site can gain access to areas where hazardous conditions or substances may be present. Ensure also that visitor/s do not enter hazard areas unescorted; (vii) Ensure the visibility of workers through their use of high visibility vests and other PPE when working in or walking through heavy equipment operating areas; (viii) Ensure moving equipment is outfitted with audible back-up alarms; (ix) Mark and provide sign boards for hazardous areas such as energized electrical devices and lines, service rooms housing high voltage equipment, and areas for storage and disposal. Signage shall be in accordance with international standards and be well known to, and easily understood by workers, visitors, and the general public as appropriate; and (x) Disallow worker exposure to noise level greater than 85 dBA for duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively. (xi) Provide supplies of potable drinking water; (xii) Provide clean eating areas where workers are not exposed to hazardous or noxious substances 		
Community Health and Safety.	Traffic accidents and vehicle collision with pedestrians during material and waste transportation	<ul style="list-style-type: none"> (i) Consult PIU before locating project offices, sheds, and construction plants; (ii) Select a campsite away from residential areas (at least 100 m buffer shall be maintained) or locate the campsite within the existing facilities of City Corporation. (iii) Avoid tree cutting for setting up camp facilities. (iv) Provide a proper fencing/compound wall for campsites. (v) Camp site shall not be located near (100 m) water bodies, flood plains flood prone/low lying areas, or any ecologically, socially, archeologically sensitive areas. 	Contractor	Contractor cost

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
		<p>(vi) Separate the workers living areas and material storage areas clearly with a fencing and separate entry and exit.</p> <p>(vii) Ensure conditions of liveability at work camps are maintained at the highest standards possible at all times; living quarters and construction camps shall be provided with standard materials (as far as possible to use portable ready to fit-in reusable cabins with proper ventilation); thatched huts, and facilities constructed with materials like GI sheets, tarpaulins, etc., shall not be used as accommodation for workers.</p> <p>(viii) Camp shall be provided with proper drainage, there shall not be any water accumulation.</p> <p>(ix) Provide drinking water, water for other uses, and sanitation facilities for employees; drinking water should be regularly tested to confirm that drinking water standards are met.</p> <p>(x) Prohibit employees from cutting of trees for firewood; contractor should provide cooking fuel (cooking gas); firewood not allowed</p> <p>(xi) Train employees in the storage and handling of materials which can potentially cause soil contamination</p> <p>(xii) Wastewater from the camps shall be disposed properly either into sewer system; if sewer system is not available, provide on-site sanitation with septic tank and soak pit arrangements (100 m away from surface water body or groundwater well)</p> <p>(xiii) Recover used oil and lubricants and reuse or remove from the site;</p> <p>(xiv) Manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas; provide a compost pit for biodegradable waste, and non-biodegradable / recyclable waste shall be collected and sold in local market</p> <p>(xv) Remove all wreckage, rubbish, or temporary structures which are no longer required; and</p> <p>(xvi) At the completion of work, camp area shall be cleaned and restored to pre-project conditions, and submit report to PIU; PIU to review and approve camp clearance and closure of work site</p>		

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
Work Camps and worksites	<p>Temporary air and noise pollution from machine operation, water pollution from storage and use of fuels, oils, solvents, and lubricants</p> <p>Unsanitary and poor living conditions for workers</p>	<ul style="list-style-type: none"> (i) As far as possible located the camp site within the work sites; if any camp to be established outside these, then select a camp site away from residential areas (at least 100 m buffer shall be maintained) (ii) Avoid tree cutting for setting up camp facilities (iii) Ensure that a proper compound wall is provided, and erect a wind/dust screen around (iv) Camp site shall not be located near (100 m) water bodies, flood plains flood prone/low lying areas, or any ecologically, socially, archeologically sensitive areas (v) Separate the workers living areas and material storage areas clearly with a fencing and separate entry and exit (vi) Provide proper temporary accommodation with proper materials, adequate lighting and ventilation, appropriate facilities for winters and summers; ensure conditions of livability at work camps are maintained at the highest standards possible at all times; (vii) Consult PIU before locating project offices, sheds, and construction plants; (viii) Minimize removal of vegetation and disallow cutting of trees (ix) Ensure conditions of livability at work camps are maintained at the highest standards possible at all times; living quarters and construction camps shall be provided with standard materials (as far as possible to use portable ready to fit-in reusable cabins with proper ventilation); thatched huts, and facilities constructed with materials like GI sheets, tarpaulins, etc., shall not be allowed as accommodation for workers (x) Camp shall be provided with proper drainage, there shall not be any water accumulation (xi) Provide drinking water, water for other uses, and sanitation facilities for employees (xii) Prohibit employees from cutting of trees for firewood; contractor should be provide proper facilities including cooking fuel (oil or gas; fire wood not allowed) (xiii) Train employees in the storage and handling of materials which can potentially cause soil contamination (xiv) Recover used oil and lubricants and reuse or remove from the site (xv) Manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas; provide a compost 	Contractor	Contractor cost

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
		<p>pit for biodegradable waste, and non-biodegradable / recyclable waste shall be collected and sold in local market</p> <p>(xvi) Remove all wreckage, rubbish, or temporary structures which are no longer required</p> <p>(xvii) At the completion of work, camp area shall be cleaned and restored to pre-project conditions and submit report to PIU; PIU to review and approve camp clearance and closure of work site.</p>		
Covid control measures 19	Health & Safety of the labourers and community	<p>Construction sites operating during the Covid-19 pandemic need to ensure they are protecting their WORKFORCE and minimising the risk of spread of infection.</p> <p>Labourers shall be provided trainings, orientation of COVID related regulations.</p> <p>COVID 19 related hygiene facilities and guidance shall be made available for the labourers in the work sites and accommodation.</p> <p>SOPs and guidelines issued by GOI and GoTN from time to time to prevent spread of Covid19 be adhered to in the work sites and camp area during sub-project implementation.</p>	Contractor	Contractor cost
Post-construction clean-up	Damage due to debris, spoils, excess construction materials	<p>(i) Remove all spoils wreckage, rubbish, or temporary structures (such as buildings, shelters, and latrines) which are no longer required; and</p> <p>(ii) All excavated roads shall be reinstated to original condition.</p> <p>(iii) All disrupted utilities restored</p> <p>(iv) All affected structures compensated</p> <p>(v) The area that previously housed the construction camp is to be checked for spills of substances such as oil, paint, etc. and these shall be cleaned up.</p> <p>(vi) The contractor must arrange the cancellation of all temporary services.</p> <p>(vii) Request PIU to report in writing that worksites and camps have been vacated and restored to pre-project conditions before acceptance of work.</p>	Contractor	Contractor cost

Table 54: Operation Stage Environmental Impacts and Mitigation Measures

Field	Anticipated Impact	Mitigation Measures	Responsible for Mitigation	Cost and Source of Funds
WTP operation	Public health, safety and environmental impacts	(i) Ensure proper knowledge transfer, hands-on training to municipal staff engaged in WTP operation has been provided by Contractor prior to handover of facility (ii) Ensure continuous uninterrupted power supply (iii) Operate and maintain the facility following standard operating procedures of operational manual (iv) Undertake preventive and periodic maintenance activities as required (v) Conduct periodic training to workers (vi) Monitoring water quality and safety in chemical handling	DBOT contractor and PIU	Operating costs
Operation and maintenance of distribution system	Blocks, overflows, system malfunction, occupational health and safety	(i) Establish regular maintenance program, including: <ul style="list-style-type: none"> Regular cleaning of grit chambers and lines to remove grease, grit, and other debris that may lead to water backups. Cleaning should be conducted more frequently for problem areas Inspection of the condition of storage reservoirs (OHT's) and identifying areas that need repair or maintenance. Items to note may include cracked/deteriorating pipes; leaking joints or seals; frequent line blockages; lines that generally flow at or near capacity; and Monitoring of water flow to identify potential inflows and outflows (ii) Develop an Emergency Response System for the water system leaks, burst and overflows, etc. (iii) Provide all necessary personnel protection equipment	PIU	Operating costs

Table 55: Construction Stage Environmental Monitoring Plan

Monitoring field	Monitoring location	Monitoring parameters	Frequency	Responsibility	Cost and Source of Funds
Construction disturbances, nuisances, public and worker safety,	All work sites	Implementation of construction stage EMP including dust control, noise control, traffic management, and safety measures. Safety during controlled blasting Site inspection checklist to review implementation is appended at Appendix 6	Weekly during construction	Supervising staff and safeguards specialists of CMSC	Staff and consultant costs are part of incremental administration costs
Ambient air quality	locations 50 m downwind direction near work sites in the sub project area;	<ul style="list-style-type: none"> PM₁₀, PM_{2.5} NO₂, SO₂, CO 	Once before start of construction and Quarterly (yearly 4-times) during construction period	Contractor in consultation with CMSC	Cost for implementation of monitoring measures responsibility of contractor
Ambient noise	locations near water distribution station;	<ul style="list-style-type: none"> Day time and nighttime noise levels 	Once before start of construction and Quarterly (yearly 4-times) during construction period	Contractor in consultation with CMSC	Cost for implementation of monitoring measures responsibility of contractor
Surface water quality	Lower Camp, Cumbum, Chinnamanur and Theni	<ul style="list-style-type: none"> pH, oil and grease, Cl, F, NO₃, TC, FC, Hardness, Turbidity BOD, COD, DO, Total Alkalinity 	Once before start of construction and Half yearly during construction period	Contractor in consultation with CMSC	Cost for implementation of monitoring measures responsibility of contractor
Soil Monitoring	Near work sites	<ul style="list-style-type: none"> Monitoring of Pb, SAR and Oil & Grease 	Once before start of construction and Quarterly (early 4-times) during construction period	Contractor in consultation with CMSC	Cost for implementation of monitoring measures responsibility of contractor

Table 56: Operation Stage Environmental Monitoring Plan

Monitoring field	Monitoring location	Monitoring parameters	Frequency	Responsibility	Cost and Source of Funds
Monitoring the water quality for IS: 10500 at head works / source before WTP (Water treatment plant).	Inlet of WTP	Turbidity Color Odor pH value @ 25°C Total Dissolved Solids @105°C	Monthly Once	DBOT Contractor will hold the responsibility for 10 years (as per the condition of the contract) and after that the responsibility lies with the PIU	Operating Cost
Monitoring the water quality for IS: 10500 at WTP outlet.	Outlet of WTP	Calcium (as Ca) Chlorides (as Cl ⁻) Magnesium (as Mg) Sulphates (as SO ₄ ⁻²) Total Alkalinity (as CaCO ₃) Total Hardness (as CaCO ₃) Iron (as Fe) Free Residual Chlorine, Total Coliform	Monthly Once		
Monitoring the water quality at various points in the distribution system.	Various locations in the distribution system	Residual chlorine	Daily Random sampling month	Madurai Municipal Corporation	Operating Cost
Noise level monitoring	Near to WTP, Headworks)	Day time and nighttime noise levels (24 hours)	Monthly Once		

A. Implementation Arrangements

215. The Municipal and Water Supply Department (MAWS) acting through TNUIFSL will be the executing agency. A program steering committee, headed by Principal Secretary, MAWS, Government of Tamil Nadu, will provide overall guidance and strategic directions to the program. A PMU for TNUFIP, headed by the Managing Director, TNUIFSL acting as Program Director will be established within TNUIFSL for overall management, planning, implementing, monitoring, reporting, and coordinating TNUFIP. The CMA will act as the Deputy Program Director in the PMU. The project ULBs, represented by respective Municipal Commissioners, will be the implementing agencies for works in cities/towns and will establish PIUs headed by a municipal engineer as full-time Project Manager. PIUs will comprise of dedicated staff responsible for overseeing implementation of projects on a day-to-day basis. The PIUs will be supported by a CMSC recruited by TNUIFSL. For the institutional capacity, public awareness, and urban governance component, CMA acting through its Commissioner, will establish a PIU and appoint a governance improvement and awareness consultant (GIAC) responsible for supporting these activities. The implementing agency for this subproject is Madurai Municipal Corporation. **A PIU has been established in Madurai Municipal Corporation headed by City Engineer (Madurai Municipal Corporation) and comprising dedicated full-time staff from engineering and other departments of Madurai Municipal Corporation.** PIU under the Madurai Municipal Corporation will be responsible for planning, implementation, monitoring and supervision, and coordination of all activities of subproject. A CMSC **has been** appointed to assist PIU in day-to-day implementation of the subproject.

216. **Safeguards Compliance Responsibilities.** ESSM in the PMU in TNUIFSL will have overall responsibility of safeguard compliance with norms. ESS Managers report to Vice President in the Projects Wing. ESS Managers (TNUIFSL) will report to the Head, Projects Division. The Assistant Executive Engineer in charge of the project, will coordinate safeguard tasks at Madurai Municipal Corporation. As expert support is available to Madurai Municipal Corporation via CMSC, and the role of Assistant Executive Engineer will be mainly to coordination, overseeing the implementation of safeguard tasks, grievance redress and reporting.

217. **PMU Safeguard Responsibilities.** Key tasks and responsibilities of the ESS Manager (Environment), for this subproject include the following:

1. DPR finalization and Bidding stage:

- (i) Ensure that all design related measures of the EMP are included designs;
- (ii) Ensure that EMP is included in bidding documents and civil works contracts including requirement for EHS supervisor with the contractor;
- (iii) Ensure that the bid/contract documents include specific provisions requiring contractors to comply with all applicable labour laws and core labour standards;
- (iv) Ensure that staff required for implementation of EMP (EHS officer) is included in the bid requirements;
- (v) Ensure that EMP cost is included in the project cost; and
- (vi) Prior to invitation of bids and prior to award of contract, ensure that all clearance/permissions as required for implementation of subproject are in place to the extent possible.

2. Construction stage:

- (i) Prior to start of construction:

- (a) Ensure that all necessary clearances/permissions/licences, including that of contractor's are in place prior to start of construction; and
- (b) Provide oversight on environmental management aspects of subprojects and ensure EMPs are implemented by PIU and contractors.
- (ii) Oversee and provide guidance to the PIU to properly carry out the environmental monitoring as per the EMP;
- (iii) Oversee grievance redress mechanism to address any grievances brought about in a timely manner; ensure that records are properly maintained;
- (iv) Consolidate quarterly environmental monitoring reports from PIU and submit semi-annual monitoring reports to TNUFSL; and
- (v) Oversee site closures to ensure that all work / facility sites are restored properly prior to issuing work completion certificate to the contractor.

3. Operation stage:

218. Ensure that quality of the water supply from the system developed under the subproject is in compliance with all government regulations, standards and conditions, such as consent to operate (CTO) for WTP from TNPCB.

219. **PIU Safeguard Responsibilities.** Key tasks and responsibilities of the PIU assisted by CMSC for this subproject include the following:

1. DPR finalization and Bidding stage:

- (i) Include design related measures of the EMP in the project design and DPR;
- (ii) Include EMP in the bidding documents and civil works contracts, including requirement of staff (EHS supervisor) with contractor for EMP implementation;
- (iii) Provide necessary budget in the project as IEE for EMO Implementation;
- (iv) Ensure that the bid/contract documents include specific provisions requiring contractors to comply with all applicable labour laws and core labour standards including:
 - a. Labour welfare measures and provision of amenities;
 - b. Prohibition of child labour as defined in national legislation for construction and maintenance activities;
 - c. Equal pay for equal work of equal value regardless of gender, ethnicity, or caste;
 - d. Elimination of forced labour;
 - e. The requirement to disseminate information on sexually transmitted diseases, including HIV/AIDS, to employees and local communities surrounding the project sites.
- (v) In the pre-bid meeting, provide insight into EMP measures, and overall compliance requirements to the bidders; and
- (vi) Obtain all clearance/permissions as required for implementation of subproject, prior to invitation of bids and/or prior to award of contract / prior to construction as appropriate.

2. Construction stage:

- (i) Identify regulatory clearance requirements and obtain all necessary clearances prior to start of construction; ensure construction work by contractor is conducted in compliance with all government rules and regulations including pollution control, labour welfare and safety etc.;
- (ii) Prior to start of construction organize an induction course for the training of contractors, preparing them on EMP implementation, environmental monitoring, and on taking immediate action to remedy unexpected adverse impacts or ineffective mitigation measures found during the course of implementation;
- (iii) Ensure contractor compliance with staff resources as per the IEE/EMP/Bid;
- (iv) Guide contractor on updating EMP / preparing Site Environmental Plan at the start of the project;
- (v) Update IEE and EMP; ensure that IEE reflects the final design being implemented by contractor;
- (vi) Conduct public consultation and information disclosure as necessary;
- (vii) Take necessary action for obtaining ROW;
- (viii) Supervise day-to-day EMP implementation on site by contractor, including the environmental monitoring plan;
- (ix) Supervise ambient environmental monitoring by contractors;
- (x) Take corrective actions when necessary to ensure no environmental impacts;
- (xi) Submit quarterly environmental monitoring reports to PMU;
- (xii) Conduct continuous public consultation and awareness;
- (xiii) Address any grievances brought about through the grievance redress mechanism in a timely manner as per the EMP;
- (xiv) Monitor Contractor's compliance with the measures set forth in the EMP and any corrective or preventative actions set forth in a safeguards monitoring report that the PMU will prepare from time to time;
- (xv) Implement corrective or preventative actions in case of non-compliance or new/unanticipated impacts;
- (xvi) Inform PMU promptly in case if any significant impacts surfaces, which were not identified in the IEE and develop necessary corrective actions as necessary and ensure implementation by the contractors; include all such impacts and suggested actions in the Quarterly Environmental Monitoring Reports;
- (xvii) Implementation grievance redress system, and undertake appropriate actions to redress the complaints; ensure that complaints/grievances are addressed in a timely manner and resolutions are properly documented;
- (xviii) Review and approve monthly progress reports submitted by Contractor on EMP compliance;
- (xix) Prepare quarterly environmental monitoring reports and submit to PMU /TNUIFSL; and
- (xx) Provide any assistance in environmental safeguard related tasks as required by PMU to ensure compliance and reporting to ADB.

3. Operation stage:

- (i) Obtain all clearances as required for operation of project prior to operation, such as consent to operate (CTO) for WTP from TNPCB;
- (ii) Conduct environmental management and monitoring activities as per the EMP; and

- (iii) Ensure that conveyance system constructed and operated with all necessary clearances and approvals, and compliance with standards and conditions.

220. Contractor's Responsibilities:

1. Bidding stage:

- (i) Understand the EMP requirements and allocate necessary resources (budget, staff, etc.); and
- (ii) Understand the regulatory compliance requirements related to labour welfare, safety, environment etc.

2. Construction stage:

- (i) Mobilize EHS Supervisor prior to start of work;
- (ii) Prepare SEMP and submit to PIU in MMC;
- (iii) Ensure that all regulatory clearances (both projects related and contractor related) are in place prior start of the construction work;
- (iv) Confirm with PIU availability of rights of way at all project sites prior to start of work;
- (v) Prepare and submit:
 - a. Construction waste management(CWM) plan(sample is in Appendix 4);
 - b. Traffic management plan (sample is Appendix 5).
- (vi) Implement the mitigation measures as per the EMP including CWM and traffic management plans;
- (vii) Follow the EMP measures/guidelines for establishment of temporary construction camps, construction waste disposal sites, and material borrow areas, etc.;
- (viii) Implement EMP and ensure compliance with all the mitigation and enhancement measures;
- (ix) Conduct environmental monitoring (air, noise, water, etc.), as per the EMP;
- (x) Undertake immediate action as suggested by PIU to remedy unexpected adverse impacts or ineffective mitigation measures found during the course of implementation;
- (xi) Submit monthly progress reports on EMP implementation to PIU;
- (xii) Act promptly on public complaints and grievances related to construction work and redress in a timely manner in coordination with PIU and CMSC; and
- (xiii) Comply with applicable government rules and regulations.

B. Training Needs

221. Table 55 presents the outline of capacity building program to ensure EMP implementation. These capacity building and trainings will be conducted at the offices of PMU and PIU by the environmental safeguards specialist of PMU / PIU and their consultants, which are part of project implementation set-up, and therefore no separate or additional costs are envisaged. Adequate costs are already considered in project's capacity building program. The detailed program and specific modules will be customized for the available skill set after assessing the capabilities of the target participants and the requirements of the project by the PMU. Regular safety induction, orientation, training programs in COVID – 19 safety for labors & staffs in site. COVID – 19 safety trainings are also to be conducted at regular periods to create awareness among the labors and update the information's. Installation of AarogyaSetu app for all staff members and labors to be considered, this app has been developed too spread awareness about Covid-19 and notify the individual if they came in close contact with an individual with Covid-19 history.

Table 57: Outline Capacity Building Program on EMP Implementation

Description	Target Participants and Venue	Cost and Source of Funds
1. Introduction and Sensitization to Environmental Issues (1 day) - ADB Safeguards Policy Statement - Government of India and Tamil Nadu applicable safeguard laws, regulations and policies including but not limited to core labor standards, OHS, etc. - Incorporation of EMP into the project design and contracts - Monitoring, reporting and corrective action planning	All staff and consultants involved in the project At PMU (combined program for all PIU)	Included in the overall program cost
2. EMP implementation (1/2 day) - EMP mitigation and monitoring measures - Roles and responsibilities - Public relations, - Consultations - Grievance redress - Monitoring and corrective action planning - Reporting and disclosure - Construction site SOP - Chance find (archeological) protocol - AC pipe protocol - Traffic management plan - Waste management plan - Site clean-up and restoration - Controlled blasting	All PIU staff, contractor staff and consultants involved in the subproject At PIU	To be conducted by CMSC at the PIU office; part of project implementation cost
3. Contractors Orientation to Workers (1/2 day) - Environment, health and safety in project construction. - Health & Safety measures during corona virus disease (COVID-19) pandemic	Before start of work, regular briefing is done once in every month. Daily briefing on safety prior to start of work All workers (including unskilled laborers)	Contractors' EHS officer to conduct program, with guidance of CMSC

ADB = Asian Development Bank, CMSC = Construction Management and Supervision Consultant, EHS = environmental Health and Safety, EMP = environmental management plan, OHS = occupational health and safety, PMU = program management unit, PIU = program implementation unit, SOP = standard operating procedures.

C. Monitoring and Reporting

222. Immediately after mobilization and prior to commencement of the works, the contractor will submit a compliance report to PIU in Madurai Municipal Corporation that all identified pre-construction mitigation measures as detailed in the EMP are undertaken. Baseline Environmental monitoring as indicated in the construction stage environmental monitoring plan should be conducted and the analysis of the outcome should be shared in the compliance report. Contractor should confirm that the staff for EMP implementation (EHS supervisor) is mobilized. PIU will review and approve the report and permit commencement of works.

223. During construction, results from internal monitoring by the contractor will be reflected in their monthly EMP implementation reports to the PIU. CMSC will monitor, review and advise contractors for corrective actions if necessary. Quarterly Environmental Monitoring Report (QEMR) summarizing compliance and corrective measures, if any, taken will be prepared by CMSC team at PIU and submitted to PMU (Report format is at Appendix 7). During operation,

PIU will conduct management and monitoring actions as per the operation stage EMP, and submit to PMU annual report.

224. Based on PIU Quarterly Environmental Monitoring Reports (QEMR) and oversight visits to subproject work sites, PMU will submit semi-annual Environmental Monitoring Report (EMR). Once concurrence from the ADB is received the report will be disclosed on TNUIFSL and Madurai Municipal Corporation websites.

225. ADB will review project performance against the TNUFIP commitments as agreed in the legal documents (loan and project agreements etc.). The extent of ADB's monitoring and supervision activities will be commensurate with the project's risks and impacts. Monitoring and supervising of social and environmental safeguards will be integrated into the project performance management system.

D. EMP Implementation Cost

226. Most of the mitigation measures require the contractors to adopt good site/ engineering practices, which should be part of their normal procedures, so there are unlikely to be major costs associated with compliance. The costs, which are specific to EMP implementation and are not covered elsewhere in the projects, are given below.

Table 58: Cost Estimates to implement the environmental management plan

S. No.	Particulars	Stages	Unit	Total Number	Rate (₹)	Cost (₹)	Costs Covered By
A.	Mitigation Measures						
1	Provision for Transplantation	Construction	Per tree	484	16,247.5	7,863,790	Project costs (PIU)
2	Provision for tree cutting and compensatory plantation measures (1:10 ratio replantation)	Construction	Per tree	1500	200	300,000	Project costs (PIU)
	Preparation of plans traffic management plan, waste (spoils) management plan etc.), traffic management at work sites (Pavement Markings, Channelizing Devices, Arrow Panels and Warning Lights) (packages 1, 3 and 4)	Construction	Lump sum	3	600,000-	1,800,000	Civil works contractor
	Subtotal (B)					9,963,790/-	
B.	Monitoring Measures						

S. No.	Particulars	Stages	Unit	Total Number	Rate (₹)	Cost (₹)	Costs Covered By
1	Air quality monitoring	Construction	per sample	432	7000	3,024,000	Civil works contractor
2	Noise levels monitoring	Construction	Per sample	520	3000	1,560,000	
3	Water monitoring	Construction	Per sample	176	7500	1,320,000	
4	Soil Quality Monitoring	Construction	Per sample	256	6000	1,536,000	
	Subtotal (C)					7,440,000/-	
C.	Capacity Building						
1.	Training on EMP implementation	Pre-construction				-	Project costs (PIU)
2.	Contractors Orientation to Workers on EMP implementation	Prior to dispatch to worksite				-	
	Subtotal (D)						
	Total (A+B+C)				INR	17,403,790/-	

EMP = environmental management plan, PMU = program management unit, PIU = program implementation unit.

ENVIRONMENTAL MONITORING FOR ALL FOUR PACKAGES ARE DETAILED BELOW

S.No	Monitoring Parameter	Frequency	Total No of Samplings				
			Package-1	Package-2	Package 3	Package 4	Total Locations
1	Air	Once in 3 Months	55	33	198	146	432
2	Noise	Once in 3 Months	55	33	198	234	520
3	Water	Once in 6 Months	36	18	56	66	176
4	Soil	Once in 6 Months	6	6	-	102	256

IX. CONCLUSION AND RECOMMENDATIONS

227. The process described in this document has been assessed for the environmental impacts of all elements of the proposed water supply system for Madurai Municipal Corporation. All potential impacts were identified in relation to Designing, pre-construction, construction, and operation phases. Planning principles and design considerations have been reviewed and incorporated into the site planning and design process wherever possible; thus, environmental impacts pertaining to the project design or location were not significant. Mitigation measures have been developed to reduce all negative impacts to acceptable levels. These were discussed with specialists responsible for the engineering aspects, and as a result of significant measures have already been included in the designs for the infrastructure.

228. A proposed 125 MLD water treatment plant will be installed and the treated water of quantity 125 MLD will be utilized / managed to fulfill the intermediate demand gap of MMC.

229. The project will be carried out in the properties of the local government and the access to the project location will be made through public ROW and existing roads. Hence, the head works site is the only land need to be procured, this would be for an extent of 2 acres, for which consent from the owner of the land has been obtained. Land acquisition by Madurai Municipal Corporation is under progress and the details of the land acquisition is covered under the resettlement plan.

230. Except pipe laying works, all other construction activities will be confined to the selected sites, and the interference with the general public and community around is minimal. There will be temporary negative impacts, arising mainly from construction dust and noise, hauling of construction material, waste and equipment on local roads (traffic, dust, safety etc.), mining of construction material, occupation health and safety aspects. Pipeline works will be conducted along edge of public roads in an urban area congested with people, activities and traffic, subproject is likely to have significant impacts during construction. Impacts mainly arise from the construction dust and noise; from the disturbance of residents, businesses, traffic by the construction work, safety risk to workers, public and nearby buildings due to deep trench excavations, especially in narrow roads, dust, access impediment to houses and business, disposal of large quantities of construction waste, etc. These are all general impacts of construction in urban areas, and there are well developed methods of mitigation that are suggested in the EMP.

231. Once the new system is operating, the facilities will operate with routine maintenance, which should not affect the environment. Improved system operation will comply with the O&M manual and standard operating procedures to be developed for all the activities. Pre audit will be carried out prior to operation of the scheme.

232. Mitigation will be assured by a program of environmental monitoring conducted during construction and operation to ensure that all measures are implemented, and to determine whether the environment is protected as intended. This will include observations on- and off-site, document checks, and interviews with workers and beneficiaries, and any requirements for remedial action will be reported to the PMU. Mitigation and monitoring measures, along with the project agency responsible for such actions, which would form part of the EMP.

233. Stakeholders were involved in developing the IEE through face-to-face discussions. Views expressed by the stakeholders were incorporated into the IEE and the planning and development of the project. The IEE will be made available at public locations and will be disclosed to a wider audience via Madurai Municipal Corporation and ADB websites. The consultation process will be

continued during project implementation, as required, to ensure that stakeholders are engaged in the project and have the opportunity to participate in its development and implementation.

234. The project's grievance redress mechanism will provide the citizens with a platform to redress their grievances, and describes the informal and formal channels, time frame, and mechanisms for resolving complaints about environmental performance.

235. The EMP will assist the project agencies and contractor in mitigating the environmental impacts and guide them in the environmentally sound execution of the proposed project. A copy of the updated EMP/ SEMP shall be kept on-site during the construction period at all times. The EMP shall be made binding on all contractors operating on the site, to ensure compliance to the conditions set out in this document.

236. The citizens of the subprojects area of Madurai City Municipal Corporation (MCMC) is the beneficiaries of this subproject. The new water supply system will provide safe drinking water of acceptable standard for the public which will improve the over-all public health in the project area. Diseases due to poor water quality, such as Cholera, diarrhoea and dysentery will be prevented so people should spend less on healthcare and lose fewer working days due to illness, so their economic status should also improve, as well as their overall health.

237. Therefore, as per ADB SPS, the project is classified as Environmental Category 'B' and does not require further Environmental Impact Assessment. Madurai Municipal Corporation shall update this IEE during the implementation phase to reflect any changes, amendments.

RAPID ENVIRONMENTAL ASSESSMENT CHECKLIST

WATER SUPPLY

Screening Questions	Yes	No	Remarks
A. PROJECT SITING IS THE PROJECT AREA			
▪ Densely populated?	✓		Subproject activities are in the urban areas of Tamil Nadu State. The central areas of the project towns are characterized by densely populated areas with narrow streets, while the outer areas are sparsely developed with wider roads. The outer areas (which are mainly recently added areas to the municipal limits) also comprise densely populated core town/village habitations surrounded by agricultural and vacant lands. Newly developing residential areas have low density and well-planned layouts.
▪ Heavy with development activities?	✓		
▪ Adjacent to or within any environmentally sensitive areas?			
▪ Cultural heritage site		✓	There are 413 nationally protected monuments in 27 districts of Tamil Nadu. The ADB Mission team confirmed during pre- and fact-finding missions that water supply subproject components' locations are not within nor adjacent to any protected monuments.
▪ Protected Area		✓	In Tamil Nadu State, there are 5 national parks, 15 wildlife sanctuaries (including four tiger reserves), 15 bird sanctuaries, and two conservation reserves. The ADB Mission team confirmed during pre- and fact-finding missions that Tranche 2 locations are not in these protected areas.
▪ Wetland		✓	
▪ Mangrove		✓	
▪ Estuarine		✓	
▪ Buffer zone of protected area		✓	There are 3 biosphere reserves in Tamil Nadu. Biosphere reserves have vast areas and may cover urban and developing areas. The ADB Mission team confirmed during pre- and fact-finding missions that Tranche 2 locations are components are/will be in the biosphere core zones.
▪ Special area for protecting biodiversity		✓	
▪ Bay		✓	
B. POTENTIAL ENVIRONMENTAL IMPACTS Will the Project cause...			
▪ Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?		✓	Not anticipated. The Mission team confirmed during pre- and fact-finding missions that Tranche 2 raw water sources are no upstream wastewater discharge.
▪ Impairment of historical/cultural monuments/areas and loss/damage to these sites?		✓	Not anticipated. The Mission team confirmed during pre- and fact-finding missions that Tranche 2 locations are not within nor adjacent to any protected historical/cultural

Screening Questions	Yes	No	Remarks
			monuments/areas.
▪ Hazard of land subsidence caused by excessive ground water pumping?		✓	Not anticipated. Groundwater will not be used as source.
▪ Social conflicts arising from displacement of communities?		✓	Not anticipated. Physical displacement is not anticipated. Temporary impacts to businesses may occur during pipelaying works and will be addressed through resettlement plans prepared to comply with ADB SPS requirements.
▪ Conflicts in abstraction of raw water for water supply with other beneficial water uses for surface and ground waters?		✓	Not anticipated. The design engineers and project preparatory team confirmed required amount of water by subprojects is negligible compared to the volumetric flow rates and availability of the surface water source. The IEEs provided lean season flows and availability to downstream users.
▪ Unsatisfactory raw water supply (e.g. excessive pathogens or mineral constituents)?		✓	Not anticipated. There are no sources of pollution upstream of the intakes. Monitoring and analysis conducted on raw water sources during design phase indicate good quality water (no pathogens and heavy metals). The WTPs are designed as state-of-the-art facilities.
▪ Delivery of unsafe water to distribution system?		✓	Not anticipated. The WTPs are designed as state-of-the-art facilities which includes on-site and timely monitoring of treated water prior to distribution. O&M Manuals will be developed as part of the contracts. Necessary equipment and training to workers will be provided under TNUIFP. The ULBs will be trained on standard operating procedures and maintenance to ensure facilities are functioning according to the designs.
▪ Inadequate protection of intake works or wells, leading to pollution of water supply?		✓	Not anticipated. The design engineers and project preparation consultants confirmed protection of intake works are included in the design and specifications.
▪ Over pumping of ground water, leading to salinization and ground subsidence?		✓	Not applicable.
▪ Excessive algal growth in storage reservoir?		✓	Not anticipated. The design engineers and project preparation consultants confirmed all overhead tanks and ground-level reservoirs are covered.
▪ Increase in production of sewage beyond capabilities of community facilities?		✓	Not anticipated. New sewerage system will be developed at the project area
▪ Inadequate disposal of sludge from water treatment plants?		✓	Not applicable. The WTP designs include sludge handling and treatment facilities. O&M Manual will include testing procedures, parameters and restriction on re-use of treated sludge. Only if it meets the Government of India standards for soil conditioner and fertilizer then will be allowed for re-use and strictly for non-food crops only.

Screening Questions	Yes	No	Remarks
▪ Inadequate buffer zone around pumping and treatment plants to alleviate noise and other possible nuisances and protect facilities?		✓	Not anticipated. WTPs will include buffer zones as required and condition in the Consent to Establish by the Tamil Nadu State Pollution Control Board.
▪ Impairments associated with transmission lines and access roads?		✓	Anticipated during construction but temporary, site-specific and can be mitigated. Complete road blocks are not envisaged. In narrow roads, traffic may be diverted but access will be ensured for pedestrians. Works will be conducted during dry season. Contractors are required to submit traffic management plan as part of site-specific EMP.
▪ Health hazards arising from inadequate design of facilities for receiving, storing, and handling of chlorine and other hazardous chemicals.	✓		Anticipated but can be managed. Potential hazard during O&M phase but not significant and can be mitigated. Chlorine will be handled by qualified and trained personnel. Dealing with chlorine chemicals will follow the proper handling of the chemical per source or manufacturer's manual. No other hazardous chemicals will be involved.
▪ Dislocation or involuntary resettlement of people?	✓		Anticipated but can be managed. Any involuntary resettlement impact is addressed in the resettlement plan prepared per ADB SPS.
▪ Disproportionate impacts on the poor, women and children, Indigenous Peoples or other vulnerable groups?		✓	Not anticipated. The contractor will be encouraged to hire workers from the local labor force.
▪ Noise and dust from construction activities?	✓		Anticipated but temporary, site-specific and can be mitigated. Nuisance/disturbance due to elevated noise may be experienced by sensitive receptors during construction. Noise will be minimized with mitigation measures specified in the EMPs. Controlled blasting if encountered will be implemented with necessary management measures identified to mitigate noise and dust. During operations, noise may be experienced by sensitive receptors due to WTP operations. This will be avoided by including noise barriers and enclosure of noise-producing components to meet IFC EHS' WHO guideline values and/or national standards, whichever is more stringent.
▪ Increased road traffic due to interference of construction activities?	✓		Anticipated during construction but temporary, site-specific and can be mitigated. Complete road blocks are not envisaged. In narrow roads, traffic may be diverted but access will be ensured for pedestrians. Works will be conducted during dry season. Contractors are required to submit traffic management plan as part of site-specific EMP.
▪ Continuing soil erosion/silt runoff from construction operations?	✓		Anticipated during construction but temporary, site-specific and can be

Screening Questions	Yes	No	Remarks
			mitigated. EMPs and contract provisions include requirement for contractors to provide silt control measures.
<ul style="list-style-type: none"> ▪ Delivery of unsafe water due to poor O&M treatment processes (especially mud accumulations in filters) and inadequate chlorination due to lack of adequate monitoring of chlorine residuals in distribution systems? 		✓	Not anticipated. The WTPs are designed as state-of-the-art facilities which includes on-site and timely monitoring of treated water prior to distribution. Each WTP will include laboratory to conduct monitoring of drinking water quality per WHO Drinking Water Guideline Values. Parameters to be monitored include residual chlorine. O&M Manuals will be developed as part of the contracts. Necessary equipment and training to workers will be provided under TNUFIP. The ULBs will be trained on standard operating procedures and maintenance to ensure facilities are functioning according to the designs.
<ul style="list-style-type: none"> ▪ Delivery of water to distribution system, which is corrosive due to inadequate attention to feeding of corrective chemicals? 		✓	Not anticipated. Treated water will be tested prior to distribution (see above) to ensure it meets WHO Drinking Water Guideline Values. The O&M Manual, standard operating procedures, equipment, trainings and regular maintenance (which are part of the contracts) will ensure safe drinking water is supplied to the system.
<ul style="list-style-type: none"> ▪ Accidental leakage of chlorine gas? 		✓	Not applicable. Chlorine gas will not be used. During operations, sodium hypochlorite solution or dry calcium hypochlorite will be used. The EMPs include measures and monitoring requirements conforming with IFC EHS Guidelines. O&M Manuals will include health and safety requirements for managing chemicals.
<ul style="list-style-type: none"> ▪ Excessive abstraction of water affecting downstream water users? 		✓	Not anticipated. The design engineers and project preparatory team confirmed required amount of water by subprojects is negligible compared to the volumetric flow rates and availability of the surface water source. The IEEs provided lean season flows and availability to downstream users.
<ul style="list-style-type: none"> ▪ Competing uses of water? 		✓	
<ul style="list-style-type: none"> ▪ Increased sewage flow due to increased water supply 		✓	Not anticipated. The increased sewage flow will be handled by the sewage management system included in TNUFIP Tranches 1 and 2.
<ul style="list-style-type: none"> ▪ Increased volume of sullage (wastewater from cooking and washing) and sludge from wastewater treatment plant 		✓	
<ul style="list-style-type: none"> ▪ Large population influx during project construction and operation that causes increased burden on social infrastructure and services (such as water supply and sanitation systems)? 		✓	Not anticipated. Engaging local labor will be a priority in TNUFIP.
<ul style="list-style-type: none"> ▪ Social conflicts if workers from other regions or countries are hired? 		✓	Not anticipated. Engaging local labor will be a priority in TNUFIP.

Screening Questions	Yes	No	Remarks
<ul style="list-style-type: none"> ▪ Risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during operation and construction? 	✓		<p>If Required Controlled blasting shall be carried out only by licenced agency and complying with the applicable Indian regulations and standards. During operations, chlorination prior to distribution is required. The EMPs include measures and monitoring requirements conforming to IFC EHS Guidelines. O&M Manuals will include health and safety requirements for managing chemicals.</p>
<ul style="list-style-type: none"> ▪ Community safety risks due to both accidental and natural hazards, especially where the structural elements or components of the project are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning? 		✓	<p>Not anticipated. Work area will be clearly demarcated. WTPs, overhead tanks and ground-level reservoirs are located inside ULB properties with compound walls and security personnel. Only workers and project-concerned members will be allowed to enter the sites. PIUs, in coordination with water and sanitation committees, will disseminate information on community health and safety.</p>

CHECKLIST FOR PRELIMINARY CLIMATE RISK SCREENING

Screening Questions		Score	Remarks^a
Location and Design of project	Is siting and/or routing of the project (or its components) likely to be affected by climate conditions including extreme weather-related events such as floods, droughts, storms, landslides?	1	Some project locations may experience flooding during heavy rains. No components will be sited in river flood plains, drainage channels, etc. Locations may however be in low-lying areas. Adequate measures will be included in the designs to safeguard facilities from extreme events.
	Would the project design (e.g. the clearance for bridges) need to consider any hydro-meteorological parameters (e.g., sea-level, peak river flow, reliable water level, peak wind speed etc.)?	1	Intakes and other structures (e.g., pumping stations, STPs) located in or close to rivers/water bodies, low lying flat lands, etc., to be designed with proper hydro-meteorological parameters
Materials and Maintenance	Would weather, current and likely future climate conditions (e.g. prevailing humidity level, temperature contrast between hot summer days and cold winter days, exposure to wind and humidity hydro-meteorological parameters likely affect the selection of project inputs over the life of project outputs (e.g. construction material)?	0	No significant effect
	Would weather, current and likely future climate conditions, and related extreme events likely affect the maintenance (scheduling and cost) of project output(s)?	0	No significant effect
Performance of project outputs	Would weather/climate conditions and related extreme events likely affect the performance (e.g. annual power production) of project output(s) (e.g. hydro-power generation facilities) throughout their design life time?	0	No significant effect

^a If possible, provide details on the sensitivity of project components to climate conditions, such as how climate parameters are considered in design standards for infrastructure components, how changes in key climate parameters and sea level might affect the siting/routing of project, the selection of construction material and/or scheduling, performances and/or the maintenance cost/scheduling of project outputs.

Options for answers and corresponding score are provided below:

Response	Score
Not Likely	0
Likely	1
Very Likely	2

Responses when added that provide a score of 0 will be considered low risk project. If adding all responses will result to a score of 1-4 and that no score of 2 was given to any single response, the project will be assigned a medium risk category. A total score of 5 or more (which include providing a score of 1 in all responses) or a 2 in any single response will be categorized as high risk project.

Result of Initial Screening (Low, Medium, High): _____

Salient Features of Major Labor Laws Applicable to Establishments Engaged in Construction of Civil Works

- (i) Workmen Compensation Act, 1923 - The Act provides for compensation in case of injury by accident arising out of and during the course of employment.
- (ii) Payment of Gratuity Act, 1972 - Gratuity is payable to an employee under the Act on satisfaction of certain conditions on separation if an employee has completed 5 years' service or more or on death at the rate of 15 days wages for every completed year of service. The Act is applicable to all establishments employing 10 or more employees.
- (iii) Employees' PF and Miscellaneous Provisions Act, 1952 - The Act provides for monthly contributions by the employer plus workers at 10% or 8.33%. The benefits payable under the Act are: (a) Pension or family pension on retirement or death as the case may be; (b) deposit linked insurance on the death in harness of the worker; (c) payment of PF accumulation on retirement/death etc.
- (iv) Maternity Benefit Act, 1951 - The Act provides for leave and some other benefits to women employees in case of confinement or miscarriage etc.
- (v) Contract Labour (Regulation and Abolition) Act, 1970 - The Act provides for certain welfare measures to be provided by the Contractor to contract labor and in case the Contractor fails to provide, the same are required to be provided by the Principal Employer by Law. The principal employer is required to take Certificate of Registration and the Contractor is required to take a License from the designated Officer. The Act is applicable to the establishments or Contractor of principal employer if they employ 20 or more contract labor.
- (vi) Minimum Wages Act, 1948 - The employer is supposed to pay not less than the Minimum Wages fixed by appropriate Government as per provisions of the Act if the employment is a scheduled employment. Construction of Buildings, Roads, Runways are scheduled employment.
- (vii) Payment of Wages Act, 1936 - It lays down as to by what date the wages are to be paid, when it will be paid and what deductions can be made from the wages of the workers.
- (viii) Equal Remuneration Act, 1979 - The Act provides for payment of equal wages for work of equal nature to Male and Female workers and not for making discrimination against Female employees in the matters of transfers, training and promotions etc.
- (ix) Payment of Bonus Act, 1965 - The Act is applicable to all establishments employing 20 or more workmen. The Act provides for payments of annual bonus subject to a minimum of 8.33 % of wages and maximum of 20 % of wages to employees drawing Rs. 3,500/- per month or less. The bonus to be paid to employees getting Rs. 2,500/- per month or above up to Rs.3,500/- per month shall be worked out by taking wages as Rs.2,500/- per month only. The Act does not apply to certain establishments. The newly set up establishments are exempted for five years in certain circumstances. Some of the State Governments have reduced the employment size from 20 to 10 for the purpose of applicability of the Act.
- (x) Industrial Disputes Act, 1947 - The Act lays down the machinery and procedure for resolution of industrial disputes, in what situations a strike or lock-out becomes illegal and what are the requirements for laying off or retrenching the employees or closing down the establishment.
- (xi) Industrial Employment (Standing Orders) Act, 1946 - It is applicable to all establishments employing 100 or more workmen (employment size reduced by some of the States and Central Government to 50). The Act provides for laying down rules governing the conditions of

employment by the employer on matters provided in the Act and get the same certified by the designated Authority.

(xii) Trade Unions Act, 1926 - The Act lays down the procedure for registration of trade unions of workmen and employees. The trade unions registered under the Act have been given certain immunities from civil and criminal liabilities.

(xiii) Child Labor (Prohibition and Regulation) Act, 1986 - The Act prohibits employment of children below 14 years of age in certain occupations and processes and provides for regulation of employment of children in all other occupations and processes. Employment of child labor is prohibited in Building and Construction Industry.

(xiv) Inter-State Migrant Workmen's (Regulation of Employment and Conditions of Service) Act, 1979 - The Act is applicable to an establishment which employs 5 or more inter-state migrant workmen through an intermediary (who has recruited workmen in one state for employment in the establishment situated in another state). The inter-state migrant workmen, in an establishment to which this Act becomes applicable, are required to be provided certain facilities such as housing, medical aid, traveling expenses from home up to the establishment and back, etc

(xv) The Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996 and the Cess Act of 1996 - All the establishments who carry on any building or other construction work and employ 10 or more workers are covered under this Act. All such establishments are required to pay Cess at rate not exceeding 2% of the cost of construction as may be notified by the Government. The employer of the establishment is required to provide safety measures at the building or construction work and other welfare measures, such as canteens, first-aid facilities, ambulance, housing accommodation for workers near the workplace etc. The employer to whom the Act applies has to obtain a registration certificate from the Registering Officer appointed by the Government.

Sample Grievance Registration Form

(To be available in Tamil and English)

The _____ Project welcomes complaints, suggestions, queries, and comments regarding project implementation. We encourage persons with grievance to provide their name and contact information to enable us to get in touch with you for clarification and feedback.

Should you choose to include your personal details but want that information to remain confidential, please inform us by writing/typing ***(CONFIDENTIAL)*** above your name. Thank you.

Date	Place of registration	Project Town			
		Project:			
Contact information/personal details					
Name		Gender	* Male * Female	Age	31.
Home address					
Place					
Phone no.					
E-mail					
Complaint/suggestion/comment/question Please provide the details (who, what, where, and how) of your grievance below:					
If included as attachment/note/letter, please tick here:					
How do you want us to reach you for feedback or update on your comment/grievance?					

FOR OFFICIAL USE ONLY

Registered by: (Name of official registering grievance)	
Mode of communication: Note/letter E-mail Verbal/telephonic	
Reviewed by: (Names/positions of officials reviewing grievance)	
Action taken:	
Whether action taken disclosed:	Yes No
Means of disclosure:	

Sample Outline Spoils (Construction Waste) Management Plan

- The Spoil Management Plan should be site specific and be part of the monthly Construction Management Plan;
- The contractor, in consultation with the PIU, has to find out appropriate location/s for the disposal of the excess soil generated. The spoils should be deposited only at these sites;
- Further precautions need to be taken in case of the contaminated spoils;
- The vehicle carrying the spoil should be covered properly; and
- The spoils generating from each site should be removed on the same day or immediately after the work is complete. The site / road should be restored to the original condition.

I. Spoils information

The spoil information contains the details like (a) The type / material; (b) Potential contamination by that type; (c) Expected volume (site / component specific); and (d) Spoil Classification etc.

II. Spoils management

The Spoil Management section gives the details of (a) Transportation of spoil; (b) disposal site details; (c) Precautions taken; (d) Volume of contaminated spoil, if present; (d) Suggested reuse of disposal of the spoil.

III. Documentation

The volume of spoil generated (site specific, date wise), site disposed, reuse / disposal details should be documented properly.

Sample Outline Traffic Management Plan

A. Principles for TMP around the Water Supply Scheme Implementation Sites

1. One of the prime objectives of this TMP is to ensure the safety of all the road users along the work zone, and to address the following issues:
 - (i) the safety of pedestrians, bicyclists, and motorists travelling through the construction zone;
 - (ii) protection of work crews from hazards associated with moving traffic;
 - (iii) mitigation of the adverse impact on road capacity and delays to the road users;
 - (iv) maintenance of access to adjoining properties; and
 - (v) addressing issues that may delay the project.

B. Operating Policies for TMP

2. The following principles will help promote safe and efficient movement for all road users (motorists, bicyclists, and pedestrians, including persons with disabilities) through and around work zones while reasonably protecting workers and equipment.
 - (i) Make traffic safety and temporary traffic control an integral and high-priority element of project from planning through design, construction, and maintenance;
 - (ii) Inhibit traffic movement as little as possible;
 - (iii) Provide clear and positive guidance to drivers, bicyclists, and pedestrians as they approach and travel through the temporary traffic control zone;
 - (iv) Inspect traffic control elements routinely, both day and night, and make modifications when necessary;
 - (v) Pay increased attention to roadside safety in the vicinity of temporary traffic control zones;
 - (vi) Train all persons that select, place, and maintain temporary traffic control devices;
 - (vii) Keep the public well informed; and
 - (viii) Make appropriate accommodation for abutting property owners, residents, businesses, emergency services, railroads, commercial vehicles, and transit operations.
3. **Figure A5.1** illustrates the operating policy for TMP for the construction of water pipes along various types of roads.

C. Analyze the impact due to street closure

4. Apart from the capacity analysis, a final decision to close a particular street and divert the traffic should involve the following steps:
 - (i) Approval from the Greater Corporation/ Highways / Public Works Department (PWD) to use the local streets as detours;
 - (ii) Consultation with businesses, community members, traffic police, PWD, etc, regarding the mitigation measures necessary at the detours where the road is diverted during the construction;
 - (iii) Determining of the maximum number of days allowed for road closure, and incorporation of such provisions into the contract documents;
 - (iv) Determining if additional traffic control or temporary improvements are needed along the detour route;

- (v) Considering how access will be provided to the worksite;
- (vi) Contacting emergency service, school officials, and transit authorities to determine if there are impacts to their operations; and
- (vii) Developing a notification program to the public so that the closure is not a surprise. As part of this program, the public should be advised of alternate routes that commuters can take or will have to take as result of the traffic diversion.

5. If full road-closure of certain streets within the area is not feasible due to inadequate capacity of the detour street or public opposition, the full closure can be restricted to weekends with the construction commencing on Saturday night and ending on Monday morning prior to the morning peak period.

Figure A5.1: Policy Steps for the TMP

Review	<ul style="list-style-type: none"> • Review construction schedule and methods
Traffic Re-Circulation	<ul style="list-style-type: none"> • Identify initial traffic recirculation and control policy
Traffic Diversions	<ul style="list-style-type: none"> • Identify routes for traffic diversions • Analyse adverse impact and mitigation at the detours
Full Road Closures	<ul style="list-style-type: none"> • Begin community consultation for consensus • Finalise or determine alternate detours
Temporary parking	<ul style="list-style-type: none"> • Identify temporary parking (on and off -street) • Discuss with CMC, owner, community for use
Police Coordination	<ul style="list-style-type: none"> • Coordinate with the Traffic Police to enforce traffic and diversions
Install control devices	<ul style="list-style-type: none"> • Install traffic control devices (traffic cones, signs, lightings, etc)
Awareness	<ul style="list-style-type: none"> • Conduct campaigns, publicity, and notify public about street closure
Public Redress	<ul style="list-style-type: none"> • Develop a mechanism to address public grievances regarding disruptions (traffic, utilities, and diversions)

D. Public awareness and notifications

6. As per discussions in the previous sections, there will be travel delays during the constructions, as is the case with most construction projects, albeit on a reduced scale if utilities and traffic management are properly coordinated. There are additional grounds for travel delays in the area, as most of the streets lack sufficient capacity to accommodate additional traffic from diverted traffic as a result of street closures to accommodate the works.

7. The awareness campaign and the prior notification for the public will be a continuous activity which the project will carry out to compensate for the above delays and minimize public

claims as result of these problems. These activities will take place sufficiently in advance of the time when the roadblocks or traffic diversions take place at the particular streets. The reason for this is to allow sufficient time for the public and residents to understand the changes to their travel plans. The project will notify the public about the roadblocks and traffic diversion through public notices, ward level meetings and city level meeting with the elected representatives.

8. The PIU will also conduct an awareness campaign to educate the public about the following issues:

- (i) Traffic control devices in place at the work zones (signs, traffic cones, barriers, etc.);
- (ii) Defensive driving behaviour along the work zones; and
- (iii) Reduced speeds enforced at the work zones and traffic diversions.

9. It may be necessary to conduct the awareness programs/campaigns on road safety during construction.

10. The campaign will cater to all types of target groups i.e. children, adults, and drivers. Therefore, these campaigns will be conducted in schools and community centres. In addition, the project will publish a brochure for public information. These brochures will be widely circulated around the area and will also be available at the PIU, and the contractor's site office. The text of the brochure should be concise to be effective, with a lot of graphics. It will serve the following purpose:

- (i) Explain why the brochure was prepared, along with a brief description of the project;
- (ii) Advise the public to expect the unexpected;
- (iii) Educate the public about the various traffic control devices and safety measures adopted at the work zones;
- (iv) Educate the public about the safe road user behaviour to emulate at the work zones;
- (v) Tell the public how to stay informed or where to inquire about road safety issues at the work zones (name, telephone, mobile number of the contact person; and
- (vi) Indicate the office hours of relevant offices.

E. Install traffic control devices at the work zones and traffic diversion routes

11. The purpose of installing traffic control devices at the work zones is to delineate these areas to warn, inform, and direct the road users about a hazard ahead, and to protect them as well as the workers. As proper delineation is a key to achieve the above objective, it is important to install good traffic signs at the work zones. The following traffic control devices are used in work zones:

- Signs
- Pavement Markings
- Channelizing Devices
- Arrow Panels
- Warning Lights

12. Procedures for installing traffic control devices at any work zone vary, depending on road configuration, location of the work, construction activity, duration, traffic speed and volume, and pedestrian traffic. Work will take place along major roads, and the minor internal roads. As such, the traffic volume and road geometry vary. The main roads carry considerable traffic; internal

roads in the new city areas are wide but in old city roads very narrow and carry considerable traffic. However, regardless of where the construction takes place, all the work zones should be cordoned off, and traffic shifted away at least with traffic cones, barricades, and temporary signs (temporary “STOP” and “GO”).

13. Illustrates a typical set-up for installing traffic control devices at the work zone of the area, depending on the location of work on the roadway, and road geometrics:

- Work on shoulder or parking lane
- Shoulder or parking lane closed on divided road
- Work in Travel lane
- Lane closure on road with low volume
- Street closure with detour

14. The work zone should take into consideration the space required for a buffer zone between the workers and the traffic (lateral and longitudinal) and the transition space required for delineation, as applicable. For the works, a 30 cm clearance between the traffic and the temporary STOP and GO signs should be provided. In addition, at least 60 cm is necessary to install the temporary traffic signs and cones.

15. Traffic police should regulate traffic away from the work zone and enforce the traffic diversion result from full street closure in certain areas during construction. Flaggers/ personnel should be equipped with reflective jackets at all times and have traffic control batons (preferably the LED type) for regulating the traffic during nighttime.

16. In addition to the delineation devices, all the construction workers should wear fluorescent safety vests and helmets in order to be visible to the motorists at all times. There should be provision for lighting beacons and illumination for night constructions.

Sample Environmental Site Inspection Report

Project Name: Providing comprehensive Water Supply Scheme to Madurai City

Contract Number:

NAME: _____ DATE: _____

TITLE: _____ DMA: _____

LOCATION: _____ GROUP: _____

WEATHER: _____

	Project Activity Stage	Survey	
		Design	
		Implementation	
		Pre-Commissioning	
		Guarantee Period	

Monitoring Items	Compliance
Compliance marked as Yes / No / Not applicable (NA) / Partially Implemented (PI)	
EHS supervisor appointed by contractor and available on site	
Construction site management plan (spoils, safety, schedule, equipment etc.,) prepared	
Traffic management plan prepared	
Dust is under control	
Excavated soil properly placed within minimum space	
Construction area is confined; no traffic/pedestrian entry observed	
Surplus soil/debris/waste is disposed without delay	
Construction material (sand/gravel/aggregate) brought to site as and when required only	
Tarpaulins used to cover sand and other loose material when transported by vehicles	
After unloading, wheels and undercarriage of vehicles cleaned prior to leaving the site	
No AC pipes disturbed/removed during excavation	
No chance finds encountered during excavation	
Work is planned in consultation with traffic police	
Work is not being conducted during heavy traffic	
Work at a stretch is completed within a day (excavation, pipe laying and backfilling)	
Pipe trenches are not kept open unduly	
Road is not completely closed; work is conducted on edge; at least one line is kept open	
Road is closed; alternative route provided and public informed, information board provided	
Pedestrian access to houses is not blocked due to pipe laying	
Spaces left in between trenches for access	

Monitoring Items	Compliance
Wooden planks/metal sheets provided across trench for pedestrian	
No public/unauthorized entry observed in work site	
Children safety measures (barricades, security) in place at works in residential areas	
Prior public information provided about the work, schedule and disturbances	
Caution/warning board provided on site	
Guards with red flag provided during work at busy roads	
Workers using appropriate PPE (boots, gloves, helmets, ear muffs etc)	
Workers conducting or near heavy noise work is provided with ear muffs	
Contractor is following standard and safe construction practices	
Deep excavation is conducted with land slip/protection measures	
First aid facilities are available on site and workers informed	
Drinking water provided at the site	
Toilet facility provided at the site	
Separate toilet facility is provided for women workers	
Workers camps are maintained cleanly	
Adequate toilet and bath facilities provided	
Contractor employed local workers as far as possible	
Workers camp set up with the permission of PIU	
Adequate housing provided	
Sufficient water provided for drinking/washing/bath	
No noisy work is conducted in the nights	
Local people informed of noisy work	
No blasting activity conducted	
Pneumatic drills or other equipment creating vibration is not used near old/risky buildings	

Signature

Sign off

Name
Position

Name
Position

Quarterly Reporting Format for Madurai Municipal Corporation / PIU

1. Introduction

- Description of subproject implemented by PIU
- Environmental category of the subproject
- Details of site personnel and/or consultants responsible for environmental monitoring
- Subproject status

No.	Subproject Name	Subproject status	List of Works	Progress of Works
		Design <input type="checkbox"/> Pre-Construction <input type="checkbox"/> Construction <input type="checkbox"/> Operational Phase <input type="checkbox"/>		

2. Compliance status with National/ State/ Local statutory environmental requirements

No.	Subproject Name	Statutory Environmental Requirements	Status of Compliance	Action Required

3. Compliance status with environmental loan covenants, if any

No. (List schedule and paragraph number of Loan Agreement)	Covenant	Status of Compliance	Action Required

4. Compliance status with the environmental management and monitoring plan

- Provide the monitoring results as per the parameters outlined in the EMP. Append supporting documents where applicable, including Environmental Site Inspection Reports.
- There should be reporting on the following items which can be incorporated in the checklist of routine Environmental Site Inspection Report followed with a summary in the semi-annual report send to ADB. Visual assessment and review of relevant site documentation during routine site inspection needs to note and record the following:
 - What are the dust suppression techniques followed for site and if any dust was noted to escape the site boundaries;
 - If muddy water was escaping site boundaries or muddy tracks were seen on adjacent roads;
 - Adequacy of type of erosion and sediment control measures installed on site, condition of erosion and sediment control measures including if these were intact following heavy rain;
 - Are their designated areas for concrete works, and refueling;
 - Are their spill kits on site and if there are site procedure for handling emergencies;
 - Is there any chemical stored on site and what is the storage condition?
 - Is there any dewatering activities if yes, where is the water being discharged;
 - How are the stockpiles being managed;
 - How is solid and liquid waste being handled on site;
 - Review of the complaint management system; and
 - Checking if there are any activities being under taken out of working hours and how that is being managed.

Summary Monitoring Table

Impacts (List from IEE)	Mitigation Measures (List from IEE)	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name of Person Who Conducted the Monitoring
Design Phase						
					-	
Pre-Construction Phase						
Construction Phase						
Operational Phase						

Overall Compliance with EMP

No.	Sub-Project Name	EMP Part of Contract Documents (Y/N)	EMP Being Implemented (Y/N)	Status of Implementation (Excellent/ Satisfactory/ Partially Satisfactory/ Below Satisfactory)	Action Proposed and Additional Measures Required

5. **Approach and methodology for environmental monitoring of the project**
 - Brief description on the approach and methodology used for environmental monitoring of each subproject.
6. **Monitoring of environmental impacts on project surroundings (ambient air, water quality and noise levels)**
 - Brief discussion on the basis for monitoring
 - Indicate type and location of environmental parameters to be monitored
 - Indicate the method of monitoring and equipment to be used
 - Provide monitoring results and an analysis of results in relation to baseline data and statutory requirements

As a minimum the results should be presented as per the tables below.

Air Quality Results

Site No.	Date of Testing	Site Location	Parameters (Government Standards)		
			PM10 µg/m ³	SO ₂ µg/m ³	NO ₂ µg/m ³

Water Quality Results

Site No.	Date of Sampling	Site Location	Parameters (Monitoring Results)					
			pH	Conductivity µS/cm	BOD mg/L	TSS mg/L	TN mg/L	TP mg/L

Noise Quality Results

Site No.	Date of Testing	Site Location	LA _{eq} (dBA) (Government Standard)	
			Day Time	Night Time

7. **Summary of key issues and remedial actions**
 - Summary of follow up time-bound actions to be taken within a set timeframe.
8. **Appendixes**
 - Photos
 - Summary of consultations conducted, if any
 - Copies of environmental clearances and permits
 - Sample of environmental site inspection report
 - Other

PUBLIC INFORMATION NOTICE TEMPLATE

Public Announcement
Madurai Municipal Corporation
Providing Dedicated Water Supply Scheme to Madurai City Corporation

Under this project, works are being conducted by xxxxxxxx Contractor to provide water supply scheme for Madurai Municipal Corporation

As part of this, works for laying pipeline network will be taken up in ----- road----/ street/ lane From.....to..... (provide dates).

We request you to kindly co-operate for smooth implementation of the works.

We also request you to drive vehicles / pedestrians to walk carefully

Inconvenience caused is regretted.

PIU - Contact No.
Contractor – Contact no.

Stakeholder Consultation/ Focussed Group Discussion for Dedicated Water Supply Scheme for Madurai Municipal Corporation from Mullai Periyar at Lower Camp

Minutes of meeting for “Dedicated Water Supply Scheme for Madurai Municipal Corporation from Mullai Periyar at Lower Camp” held at Uthamapalyam Town Panchayat office on 13 March 2018.

Officers Present:

Sl. No.	Name	Designation
1	Thiru. P. Manivannan	Deputy Commissioner Madurai Municipal Corporation
2	Thiru. A. Mathuram	City Engineer, Madurai Municipal Corporation
3	Thiru J. Balasanmugam	Thasildhar, Uthamapalayam Taluk, Theni District
4	Thiru. M.Suruli	Head Quarters Thasildhar, Uthamapalayam Taluk, Theni District
5	Thiru S. Ram Kumar	VAO, Mela Gudalur (South)
6	Thiru. M. Asokan	Village Assistant Mela Gudalur (South)
7	Thiru. B. Karutha pandiyan	AEE/VWS, Madurai Municipal Corporation
8	Thiru. P. Mani	JE, Pannaipatti, WTP, Madurai Municipal Corporation

Farmers present:

Sl.No.	Name	Address/Place
1	Thiru P. Gopal	Lower Camp
2	Thiru.VethaMuthu	Lower Camp
3	Thiru. R. S. Paramaraj	Gudalur
4	Thiru.P. Murugeshan	Gudalur
5	Thiru. Veerbabu	Gudalur
6	Thiru. Asokan	Lower Camp

1. The meeting started with a welcome by Thiru.P. Manivannan, Deputy Commissioner of Madurai Municipal Corporation. The City Engineer, Madurai Municipal Corporation has explained the importance of the “Dedicated Water Supply Scheme for Madurai Municipal Corporation from Mullai Periyar at Lower Camp” and explain the Madurai City Population growth, facilities available, existing drinking water details etc, and the Project Area. At the outset of presentation, the following points have been discussed:

- The project head works located in the private land near Lower Camp in Mullai Periyar River and land acquisition has to be made. The City Engineer has requested the land owner to give land for construction of intake well and other components of the project with good opinion;
- The City Engineer further explained the pipeline alignment of the project, the land owner, Thiru Veerbabu has requested the pipeline alignment to be fixed without affecting agricultural land of the farmers;
- All the farmers presented in the meeting and have requested that less numbers of farmers were attended in the meeting, hence the meeting may be shift to Gudalur on 17 March 2018 for explaining the project details and getting good opinion from farmers; and
- Resolved that the “Dedicated Water Supply Scheme for Madurai Municipal Corporation from Mullai Periyar at Lower Camp” withfarmers meeting may be shifted to Gudalur on 17 March 2018 for further discussion.

2. At the end of discussion Thiru. A. Mathuram, City Engineer, Madurai Municipal Corporation thanked everyone for attending the meeting and putting forward their suggestions for the implementation of the project.

City Engineer

Madurai Municipal Corporation

Minutes of Meeting for “Dedicated Water Supply Scheme for Madurai Municipal Corporation from Mullai Periyar at Lower Camp” held at Gudalur Municipality office Conference on 17 March 2018.

Officers Present:

Sl.No.	Name	Designation
1	Thiru. P. Manivannan	Deputy Commissioner Madurai Municipal Corporation
2	Thiru.A. Mathuram	City Engineer, Madurai Municipal Corporation
3	Thiru J. Balasanmugam	Thasildhar, Uthamapalayam Taluk, Theni District
4	Thiru. M.Suruli	Head Quarters Thasildhar, Uthamapalayam Taluk, Theni District
5	Thiru S. Ram Kumar	VAO, Mela Gudalur (South)
6	Thiru. M. Asokan	Village Assistant Mela Gudalur (South)
7	Thiru. B. Karutha pandiyan	AEE/VWS, Madurai Municipal Corporation
8	Thiru. P. Mani	JE, Pannaipatti, WTP, Madurai Municipal Corporation

Farmers / Public Present:

S.I.No:	Name	Designation
1.	C. Dravidamani	Advisor, Makkal Mantram
2.	V.Krishnamurthy	Assistant president, Makkal Mantram
3.	P.A. Mahindra	Makkal Mantram
4.	P.K.R.	N.S.K.& Farm Manager
5.	K.P.M. Matharsha	President, Makkal Mantram
6.	K.S. Veerbabu	All Farmers Association
7.	K. Shajahan	Secretary, Association for City Welfare Service
8.	K. Prakhas	Farmer
9.	S. Prabhakaran	Reporter, Dinamani
10.	S. S. Murugan	Reporter, Dinathanthi, Malaimazhar

S.I.No:	Name	Designation
11.	P. Pandikumar	Reporter, Danthi TV
12.	N. Senthil kumar	Natural Farmers Association, Theni District
13.	M.Natarajan	Gudalur
14.	C. Silambarasan	General Secretary for Youth, Theni District
15.	D.Raju	Farmers Association
16.	N. Jeyapal	Farmer – Treasurer
17.	V. Kodiarasan	Farmer
18.	N. Mohamed Ibrahim	Gudalur
19.	K. Sangappan	Gudalur
20.	R. Karnan	Gudalur
21.	M.Senkuttuvan	Gudalur
22.	S. RamKumar	VAO, Mela Gudalur (South)
23.	Tmt. C. Saroja	Lower Camp

3. The meeting started with a welcome by Thiru.P. Manivannan, Deputy Commissioner of Madurai Municipal Corporation. The City Engineer, Madurai Municipal Corporation has explained the importance of the dedicated water supply scheme for Madurai Municipal Corporation from Mullai Periyar at Lower Camp” and explain the Madurai City Population growth, facilities available, existing drinking water details etc, and the Project Area. At the outset of presentation, the following points have been discussed.

4. The Following Members have stated in the Meeting about water shortage in the Theni District due to implementation of dedicated water supply scheme for Madurai Municipal Corporation. They have raised the same queries about water drawal from the Periyar Dam and whether it will affect the irrigation facilities of the farmer in the Theni District.

- (i) Senguttuvan, Deputy Secretariat, All former association Theni District
- (ii) Rajiv, District President, All farmer association Theni District
- (iii) Senthilkumar, Deputy President, All farmer association Theni District
- (iv) V.Krishnamoorthy, Public Association Gudalur
- (v) P.A Gajendran, Public Association Gudalur
- (vi) K.P Matharsha, President Public Association Gudalur
- (vii) Dhiravidamani, Public Association Gudalur
- (viii) Subramanian, Public Association Gudalur
- (ix) Veerbabu, All farmer association Gudalur
- (x) Shajahan, All farmer association Gudalur
- (xi) Pudhurasu, Tamilnadu Consumer Organiser

5. The City Engineer Madurai Municipal Corporation has replied that in the Periyar Dam 200 Cusecs has been allotted for drinking water to the Madurai Municipal Corporation in the allotted quantity only 50 Cusecs will be drawn for above scheme. Remaining 150 Cusecs will be in the river flow and while implementation of Mullai Periyar Scheme will not affect the irrigation and drinking water facilities.

6. In the Meeting Tmt.Saroja, the landowner of Proposed Head Works has agree to give her land for construction of intake wells and other components.

7. At the end of discussion Thiru. A. Mathuram, City Engineer, Madurai Municipal Corporation thanked everyone for attending the meeting and putting forward their suggestions for the implementation of the project.

City Engineer
Madurai Municipal Corporation

Public Hearing Attendees

Madurai Corporation

Meeting: AMRUT - Mullaipeniyai Meeting.

Date: 08.03.18, Time: 05.00 P.M

Venue: Conference Hall

Sl No.	Name	Designation	Signature
1	J. SELVAM	Joint Sec T.N. Chamber	9431-51848
2	H. JAFFER SADIQ	Atty. General / R.E. Rotary Club	98947 80009
3	T. Saravanan	LIAS CLUB	94428-17178
4	T.K. SIVAKUMAR	PRESIDENT, PATTINAM CHAMBER	934402180
5	S. Chandran	Convener, Environment Panel, C.I.I. Madurai	9444108500
6	S. Selvan	MR. ZONE TV	97898 10186
7	O. Arasu	ER Z1	9437 39519
8	S.N. Rajendran	ER Z2	944263595
9	S. Chinnabhaiyan	ER Z3	
10	V. Rajanathan	CEEP	
11	S. RETHINAVELU	Sr. President T.N. Chamber	98430 53153
12	M. VenkatasalaPati	MADURAI ALUMNI	9994596640
13	S. S. S. S. S.	Chennai	

Meeting: Dedicated water supply scheme for Madurai Corporation.

Date...13.03.2016 Time.....

Venue: Mullai Periyar meeting

29.03.2016

Sl. No.	Name	Designation	Signature
1	Dr. V. V. S. S. S. S.	Dr. V. V. S. S. S.	Dr. V. V. S. S. S.
2		Dr. V. V. S. S. S.	
3	P. S. S. S.	Dr. V. V. S. S. S.	P. S. S. S.
4	Dr. V. V. S. S. S.	Dr. V. V. S. S. S.	Dr. V. V. S. S. S.
5	M. S. S. S.	Dr. V. V. S. S. S.	M. S. S. S.
6	S. S. S. S.	Dr. V. V. S. S. S.	S. S. S. S.
7	R. S. S. S.	Dr. V. V. S. S. S.	R. S. S. S.
8	P. S. S. S.	Dr. V. V. S. S. S.	P. S. S. S.
9	S. S. S. S.	Dr. V. V. S. S. S.	S. S. S. S.
10	P. S. S. S.	Dr. V. V. S. S. S.	P. S. S. S.
11	B. S. S. S.	Dr. V. V. S. S. S.	B. S. S. S.

Madurai Corporation

Meeting :

Date..16/3/18...., Time.....

Venue: பெரியநி கெட் ஹால்

Sl. No.	Name	Designation	Signature
1	Dr. V. Venkateswaraiah	Dr. V. Venkateswaraiah Dr. V. Venkateswaraiah	Dr. V. Venkateswaraiah
2	Dr. S. S. S. S. S.	Dr. S. S. S. S. S. Dr. S. S. S. S. S.	Dr. S. S. S. S. S.
3	Dr. B. S. S. S.	Dr. B. S. S. S. Dr. B. S. S. S.	Dr. B. S. S. S.
4	Dr. S. S. S. S.	Dr. S. S. S. S. Dr. S. S. S. S.	Dr. S. S. S. S.
5	Dr. R. S. S. S.	Dr. R. S. S. S. Dr. R. S. S. S.	Dr. R. S. S. S.
6	Dr. S. S. S. S.	Dr. S. S. S. S. Dr. S. S. S. S.	Dr. S. S. S. S.
7	Dr. S. S. S. S.	Dr. S. S. S. S. Dr. S. S. S. S.	Dr. S. S. S. S.
8	Dr. S. S. S. S.	Dr. S. S. S. S. Dr. S. S. S. S.	Dr. S. S. S. S.
9	Dr. S. S. S. S.	Dr. S. S. S. S. Dr. S. S. S. S.	Dr. S. S. S. S.
10	Dr. S. S. S. S.	Dr. S. S. S. S. Dr. S. S. S. S.	Dr. S. S. S. S.
11	Dr. S. S. S. S.	Dr. S. S. S. S. Dr. S. S. S. S.	Dr. S. S. S. S.














⑥

Madurai Corporation

Meeting :

Date... 16/3/18... Time.....

Venue: collector office

Sl. No.	Name	Designation	Signature
13.	R. Viswanath	EE/PMC Division/ (I/c) Melur	
14	G. Jeyaraj	Asst (S.I.)	
15	P. Nagabai	HM (C&E)	
16	B. Kumar	CSG Retd Gen	
17	T. P. Prasad	T.N.H.B. 1/2 Sector B.M. Nagar	
18	T. N. HARI KESAVAN	T.N.H.B. 1/2 Sec Analyst Madurai	
19	C. GNAYAGAN	T.N.H.B. Ch. Analyst Madurai-12	
20	A. ALWAR	Viswanathapuram	
21	A. SHEIKH HUSSAIN	Extra Resident Welfare & Associate	
22	P. S. ADARSHAN	Mangalavinayaga Nagar & Pongala	
23		Madurai-17	
24	R. L. K. S. S. S.	Asst. Secy	
25	Dr. S. S. S.	Asst. Secy	
26	P. Chandra Sekar	Public Works Secretary P & Nagar, Madurai	

31	2	A. Prabhakaran	Adviser	A. Prabhakaran
32	3	R. Prasad	Adviser	A. Prabhakaran 9865441996
33	4	N. Prasad	Adviser	N. Prasad 9500206431
34	5	V. Prasad	Adviser	V. Prasad 9442126775
35	6	R. Kandasamy	Member, ANSALA	R. Kandasamy 8903503942
36	7	B. Prasad	Adviser	B. Prasad 9442126775
37	8	V. R. G. Mohan	President, Karpaga Nagar	V. R. G. Mohan 9944210711
38	9	M. Srinivasan	President, Karpaga Nagar	M. Srinivasan 9443172603
39	10	G. Rajendran	President, SELVAPURAM	G. Rajendran 9443471865
40	11	N. Muthu	President, Karpaga Nagar	N. Muthu

41	12	S. செந்திரன்	சென்னை	S. S. L.
			சென்னை	
42	13	H. Manikandan	சென்னை	
			சென்னை	
43	14	K. கிருஷ்ணன்	சென்னை	
			சென்னை	
44	15	R. Ramanathan	சென்னை	
			சென்னை	
45	16	R. Thangasamy	சென்னை	
			சென்னை	
46	17	X. A. Asumary	சென்னை	
			சென்னை	
47	18	S. GNANASEKARAN	சென்னை	
			சென்னை	
48	19	Rmke Marjanar	சென்னை	
			சென்னை	
49	20	M. கிருஷ்ணன்	சென்னை	
			சென்னை	
50	21	M. Lazar	சென்னை	
			சென்னை	
51	22	M. Nagarajan	சென்னை	
			சென்னை	
52	23	M. Jaganmohan	சென்னை	
			சென்னை	
53	24	S. Alexander	சென்னை	
			சென்னை	

(9)

Madurai Corporation

Meeting :

Date...16/3/18..., Time.....

Venue: Collector's Office

Sl. No.	Name	Designation	Signature
54	M. Stephen Anthony	Chairman	M. Stephen Anthony
55	Y. S. S. A. Lakshmi	Member	Y. S. S. A. Lakshmi
56	K. S. Raghavaram	Member	K. S. Raghavaram
57	L. Srinivasan	Member	L. Srinivasan
58	M. Srinivasan	Member	M. Srinivasan
59	S. S. S. Srinivasan	Member	S. S. S. Srinivasan
60	S. S. S. Srinivasan	Member	S. S. S. Srinivasan
61	S. S. S. Srinivasan	Member	S. S. S. Srinivasan
62	M. Srinivasan	Member	M. Srinivasan
63	M. Srinivasan	Member	M. Srinivasan
64	S. S. S. Srinivasan	Member	S. S. S. Srinivasan
65	S. S. S. Srinivasan	Member	S. S. S. Srinivasan
66	R. Srinivasan	Member	R. Srinivasan
67	K. R. Kuppusamy	Member	K. R. Kuppusamy
68	P. Srinivasan	Member	P. Srinivasan
69	M. K. Srinivasan	Member	M. K. Srinivasan

Madurai Corporation

(10)

Meeting :

Date.....16/3/18..... Time.....

Venue: collector office

Sl. No.	Name	Designation	Signature
70	R. Jeya	ASSISTANT ENGINEER	R. Jey
71	R. ROJASEELI	A.B.	R. Rojaseeli
72	M. Ponnai	AE	M. Ponnai
73	S. Hanjula Devi	AE	S. Hanjula Devi
74	R. Kani	Assistant Engineer	R. Kani
75	P. V. Krishna	Asst. Engr, Ndu Corp	P. V. Krishna
76	K. MALLIKARATHAN	Asst. Engineer	K. Mallikarathan
77	J. Suresh Kumar	AE Madurai Corporation	J. Suresh Kumar
78	M. S. S. S. S. S.	MS S. S. S. S.	M. S. S. S. S.
79	S. S. S. S. S.	S. S. S. S. S.	S. S. S. S. S.
80	K. S. Kanthappa	AE	K. S. Kanthappa
81	M. Briogna	A.E	M. Briogna
82	V. ARUMUKAM	AE	V. Arumukam
83	M. MUNEEBANAME	A.E, ward (94 to 99)	M. Muneebaname
84	S. K. S. S. S.	S. K. S. S. S.	S. K. S. S. S.
85	K. S. S. S.	TE, ward 33, 35	K. S. S. S.
86		TE, ward 43	

R. Sankar/Kumar

AEE/Corporation

S. S. S. S.

Madurai Corporation

Meeting :

Date: 17/3/18, **Time:** 12:00 PM

Venue: 1st floor, 1st floor

Sl. No.	Name	Designation	Signature
1	C. Davidmani	Chief Engineer	
2	V. Srinivasan	2nd Engineer	V. S.
3	M. Srinivasan	Chief Engineer	M. S.
4	P. K. Pambath	Chief Engineer	P. K. P.
5	K. Srinivasan	Chief Engineer	K. S.
6	K. S. Srinivasan	Chief Engineer	K. S. S.
7	K. Srinivasan	Chief Engineer	K. S.
8	K. Srinivasan	Chief Engineer	K. S.
9	K. Srinivasan	Chief Engineer	K. S.
10	S. S. Srinivasan	Chief Engineer	S. S. S.
11	P. Srinivasan	Chief Engineer	P. S.
12	N. Srinivasan	Chief Engineer	N. S.
13	M. Srinivasan	Chief Engineer	M. S.
14	C. Srinivasan	Chief Engineer	C. S.
15	R. Srinivasan	Chief Engineer	R. S.
16	N. Srinivasan	Chief Engineer	N. S.
17	S. S. Srinivasan	Chief Engineer	S. S. S.

Madurai Corporation

Meeting :

Date 17/3/18....., Time... 12:00 .

Venue :

[illegible]



Photographs of Meeting with landowner held at Gudalur for the dedicated water supply scheme for Madurai Corporation from Mullai Periyar



Photographs of Public Consultation Meeting held at Uthamapalayam for the dedicated water supply scheme for Madurai Municipal Corporation from mullai periyar



Public Works Department Permission for withdrawal of Water

018532 ABSTRACT

Water Resources Department – Combined Water Supply Schemes- Drawal of water by Tamil Nadu Water Supply and Drainage Board to Theni, The Nilgiris, Dindigul, Madurai and Coimbatore Districts from Government Sources- Schemes Recommended by the Technical Sub-Committee involving drawal of water of 1 MGD and above – Approved by the Water Utilisation Committee – Permission Granted- Orders- issued.

G.O (4D) No.6 Public Works (W2) Department

Dated : 23.7.2018
சென்னை, ஆக 7
திருவள்ளூர் ஆண்டு 2049

Read:-

1. G.O. (Ms) No. 700, Public Works Department, dated 18.10.1996.
2. G.O.(Ms) No.242, Public Works Department, dated 28.11.2006.

Read also:-

3. From the Engineer-in-Chief, Water Resources Department Chennai Letter No. S7(1)/72508/OT-W/1506, dated 18.12.2017.

ORDER:-

In his letter third read above the Engineer-in-Chief, Water Resources Department, Chennai has forwarded the proposal of water supply schemes, involving drawal of water of 1 MGD (Million Gallon per Day) and above from Government sources which were already approved in the 67th Technical Sub-Committee meeting and recommended to place before the Water Utilization Committee, for consideration and clearance.

2. Based on this, The Water Utilization Committee meeting held on 20.12.2017 under the Chairmanship of the Principal Secretary to Government, Public Works Department approved the proposals submitted by the Tamil Nadu Water Supply and Drainage Board and Madurai Corporation which were recommended by the Technical Sub-committee in its 40th meeting.

3. After careful examination, the Government have decided to accept the recommendations of the Water Utilization Committee and permit the Tamil Nadu Water Supply and Drainage Board in Theni, The Nilgiris, Dindigul and Coimbatore Districts and Madurai Corporation to draw water from the respective sources, as detailed below subject to the usual terms and conditions which are appended to this order.

Scanned by CamScanner

- (i) for drawal of 2.08 mld of surface water from the pickup weir on the downstream side of Vaigai Dam in Theni District for providing CWSS to Vadugapatty Town Panchayat and 57 other Rural Habitations in Peiryakulam Union and Horticulture College in Theni District Battagundu Town, Panchayat in Dindigul District.
- (ii) for drawal of 12.74 mld of surface water from Emerald Reservoir in The Nilgiris District for providing Combined Water Supply Scheme (CWSS) to Coonoor Municipality, Wellington Military Station and Pasteur Institute of India, Coonoor.
- (iii) for drawal of 1.42 mld (6.46 mld) of surface water from Keel Gundar River through a leading channel on the upstream side of proposed check dam in Keel Gundar River for providing Water Supply Improvement Scheme (WSIS) to Kodaikanal Municipality, in Dindigul District.
- (iv) for drawal of 125mld (27.50mld/51.09cusecs), for dedicated Water Supply Scheme for Madurai Corporation from Mullai Periyar River at Lower Camp being the intermediate stage requirement as of the year 2034, subject to the conditions that the Madurai Corporation to design the Scheme for drawal of Water from Mullai Periyar River in holistic manner such that waste water generated in Madurai Corporation has to be collected, treated and reused to avoid reduction in water supply to irrigation and subject to the usual terms and conditions stipulated by Chief Engineer, Water Resources Department, Madurai region.
- (v) for a quantum of 178.30 mld from Bhavani barrage - I at Samayapuram being the intermediate stage requirement as of the year 2035 for Water Supply Improvement Scheme to Expanded Coimbatore Corporation including newly merged areas with River Bhavani as source.
- (vi) wherever intermediate water requirement is approved by Water Utilisation Committee, Tamil Nadu Water Supply and Drainage Board or other organizations may approach Water Utilisation Committee afresh at the appropriate time regarding review and approval for their ultimate water requirement.

4. The Engineer-in-Chief, Water Resources Department, and Chief Engineer (General), Chennai and respective Regional Chief Engineers are also directed to permit the Tamil Nadu Water Supply and Drainage Board in Theni, The Nilgiris, Dindigul and Coimbatore Districts and the Madurai Corporation to draw the specified quantity of water from the specified places subject to the terms and conditions stipulated in the annexure to this order. Water charges shall be levied in accordance with the orders in force.

(By order of the Governor)

S.K. Prabakar
Principal Secretary to Government

To
The Additional Chief Secretary and
Commissioner of Land Administration, Chepauk, Chennai-5.

The Engineer-in-Chief, Water Resources Department, and
 Chief Engineer (General), Public Works Department, Chennai-5.
 The Chief Engineer, Water Resources Department,
 Coimbatore Region, Coimbatore.
 The Chief Engineer, Water Resources Department,
 Madurai Region, Madurai.
 The Managing Director,
 Tamil Nadu Water Supply and Drainage Board, Chennai - 5.
 The District Collectors,
 Theni District, The Nilgiris District, Dindigul District,
 Madurai District and Coimbatore Districts
 The Commissioner, Corporation of Madurai, Madurai
 The Additional Chief Secretary to Government,
 Industries Department, Secretariat, Chennai - 9.
 The Principal Secretary to Government,
 Municipal Administration & Water Supply Department,
 Secretariat, Chennai - 9.
 The Agriculture production, Commissioner and Principal Secretary to Government,
 Agriculture Department, Secretariat, Chennai - 9.
 The Chief Engineer, State Ground & Surface Water Resources Data Centre,
 Water Resources Department, Chennai - 113.
 The Chief Engineer, Plan Formulation, Chennai-5
 The Chief Engineer, Design Research and Construction Support,
 Water Resources Department, Chennai - 5.
 The Commissioner of Agriculture, Chennai - 5.
 The Engineering Director, Tamil Nadu Water Supply and Drainage Board, Chennai - 5.
 The Chief Engineer, Operations and Maintenance, Chopaluk, Chennai-5
 The Chief Engineer and Director, Institute of Water Studies,
 Water Resources Department, Taramani, Chennai - 113.
Copy to:
 The Hon'ble Chief Minister's Office, Chennai - 9.
 The Resident Audit Officer,
 Office of the Principal Accountant General
 (General and Social Sector Audit),
 Tamil Nadu Secretariat, Chennai-9.
 The Principal Accountant General (Audit-I), Chennai - 18.
 Stock File / Spare Copy

// Forwarded by order//

Section Officer

Annexure of G.O. (4D) No.6, Public Works (W2) Department, Dated 23.7.2018

Conditions for drawal of water from Government sources by the TWAD Board/ Madurai Corporation

1. The Technical and Economical – viability of the scheme will be left to the Tamil Nadu Water Supply and Drainage Board (TWAD)/ Madurai Corporation.
2. The present drawal should not affect the existing water supply to the nearby villages etc.,
3. The construction of collection wells cum pump house should not obstruct the free flow of water in the river and the location should be decided in consultation with the Chief Engineer, Water Resources Department of the concerned Region.
4. The proposed tapping point for the present proposal should be 500 metre away from the abstractions area in the River near the existing collection wells, if any available for the water supply scheme.
5. No damages should be caused to the riverbanks during the process of laying pipelines across the river, if any damages are caused, it should be rectified by the TWAD Board/ Madurai Corporation at their cost.
6. Free flow of water in the river should be ensured.
7. Laying of pipe lines should be done at least 1.5 m below the deepest bed level of the river.
8. Necessary protective works for the riverbanks on either side should be made where the pipelines cross the river.
9. The construction works in the river should be executed only in the presence of the field officers of Water Resources Department, PWD.
10. The TWAD Board, Municipality, Panchayats, etc., / Madurai Corporation should not come up with any request for special release of water for recharging the bed of the river during non-flow season.
11. The TWAD Board, Municipality, Panchayat etc., / Madurai Corporation have to pay necessary royalty charges (fixed by the Government from time to time) for the industrial and commercial demands.
12. Measuring devices (water meter) must be provided by the TWAD Board/ Madurai Corporation to calculate the quantity of water drawn out of the above source.

5

Approaches for checking the water meter must be provided by the TWAD Board/ Madurai Corporation.

13. The proposed drawal quantity of water should not be exceeded in future without the approval of the Water Utilisation Committee and the Government.
14. An agreement is to be executed by the TWAD Board/ Madurai Corporation with Water Resources Department, Public Works Department for drawal of water.
15. Concurrence of the District Collector should be obtained before commencement of the scheme.
16. Resolution of the local body should be obtained before commencement of the scheme.
17. Necessary treatment plants should be established with adequate infrastructure for collection of sewage and sullage and treated effluent of accepted standards should be allowed to be discharged anywhere within the sub basin for ground water recharging with separate recharging structures.

S.K. Prabakar
Principal Secretary to Government

// True copy//


Section Officer

PRESENT ACTIVITY STATUS

<u>Mullai Periyar Water Supply Scheme - Raw Water Main Package 1</u>							
	Starting Location	Starting Chainage	End Location	End Chainage	Dia of Pipeline	Present Status	Remarks
1	Headwork's at Lower Camp	LS 0 M	NHAI Road	LS 900 M	1100mm MS Pipe	Permission proposal submitted to MD/TWAD/Chennai. Remarks attended and submitted on 17.06.2020	PMC may contact personally TWAD office.
2	NHAI Road at Lower Camp	LS 900 M	Veerapandi Bye Pass	LS 48800 M	1100mm MS Pipe	Permission Obtained on 16.05.2020. Rs.3.53 Crore amount to be remitted to the NHAI, Dindigul	Amount to be remitted and will be paid during execution
3	Veerapandi Bye Pass	LS 48800 M	Aranamanai Pudur Junction at Theni (Koduvilarpatti Road)	LS 56200 M	1100mm MS Pipe	Permission Obtained for Rs.12.00 Crore amount to be remitted to the Divisional Engineer state Highways Department Theni	Amount to be remitted and will be paid during execution
4	Koduvilerpatti Road	LS 56200 M	Aranmanai Pudur	LS 58700 M	1100mm MS Pipe		
5	Railway Crossing - Aranmanai Pudur	--	Theni Road Junction LC No. 68	--	1100mm MS Pipe	Permission Obtained. Demand received from DRM, Railway division Madurai for Rupees 13.88 Cr amount yet to be remitted to DRM, Railway division, Madurai.	Amount to be remitted and will be paid during execution
6	Aranmanai Pudur	LS 58700 M	Kanavilaku	LS 67340 M	1100mm MS Pipe up to 61000 M 1050 mm MS Pipe from LS 61000 M	Permission Obtained. Demand received for Rs. 3.00 Cr. Amount to be remitted to the DE/National Highways, Chennai	Amount to be remitted and will be paid during execution
7	Kanavilaku	LS 67340M	Vaigai Dam Roundana	LS 74740 M	1050 mm MS Pipe	Permission Obtained. Demand received for Rs.0.81 Cr amount to be remitted to the DE, State Highways Dept., Theni.	Amount to be remitted and will be paid during execution
8	Vaigai Dam Roundana	LS 74740 M	Vaigai Dam Pickup Weir	LS 76740	1050 mm MS Pipe	Permission Obtained. Demand received for Rs. 3.00 Cr. Amount to be remitted to the EE/PWD/WRO/Madurai. (Amount includes item 1 & 4 of Package 3 also).	Amount to be remitted and will be paid during execution
9	Vaigai Dam Pickup Weir	LS 76740	WTP at Pannaipatti	LS 95740 M	1050 mm MS Pipe	Madurai Corporation Own Land	Clear

<u>Mullai Periyar Water Supply Scheme - Clear Water Main Package 3</u>							
Sl. No	Starting Location	Starting Chainage	End Location	End Chainage	Dia of Pipeline	Present Status	Remark
1	WTP at Pannaipatti	LS 0 M	Mattaparai Junction	LS 24000 M	1400 mm MS Pipe	Permission Obtained. Demand received for Rs. 3.00 Cr. Amount to be remitted to the EE/PWD/WRO/Madurai. (Amount includes item 8 of Package 1 & item 4 of Package 3 also).	Amount to be paid to get the Permission.
2	Mattaparai Junction	LS 24000 M	Karupatti Railway Station	LS 29000 M	1400 mm MS Pipe	Permission Obtained.. Demand received for Rs 2.45 Cr to be remitted to the DE Highways Madurai.	Amount to be paid to get the Permission.
3	Karupatti Railway Station LC No. 341 - Km 470/600	--	Karupatti Railway Station LC No. 341 - Km 470/700	--	1400 mm MS Pipe	Demand received form DRM, Railway division Madurai for Rs.13.88 Cr. Amount yet to be remitted to railway for getting permission. (Amount includes item 5 of package-1 also).	Amount to be paid to get the permission.
4	Karupatti Railway Station	LS 29000 M	Nedunkulam Railway Station	LS 35000 M	1400 mm MS Pipe	Permission Obtained. Demand received for Rs. 3.00 Cr. Amount to be remitted to the EE/PWD/WRO/Madurai. (Amount includes item 8 of Package 1 & item 1 of Package 3 also).	Amount to be paid to get the Permission.

5	Nedunkulam Railway Station LC No. 349 - Km 476/500	--	Nedunkulam Railway Station LC No. 349 - Km 476/600	--	1400 mm MS Pipe	Demand received form DRM, Railway division Madurai for Rs.13.88 Cr. Amount yet to be remitted to railway for getting permission. (Amount includes item 3 also).	Amount to be paid to get the permission.
6	Nedunkulam	LS 35000 M	Thatchampathu	LS 36000 M	1400 mm MS Pipe	Permission Obtained. Demand received for Rs.2.48 Cr to be remitted to the ADE/Highways /Vadipatti.	Amount to be paid to get the permission.
7	Thatchampathu	LS 36000 M	Thennur	LS 38000 M	1400 mm MS Pipe		Amount to be paid to get the permission.
8	Thennur	LS 38000 M	Samayanallur	LS 44000 M	1400 mm MS Pipe		Amount to be paid to get the permission.
9	NHAI Road (SamayanallurFourline Crossing) along with road 620M	LS 44000 M	NH 7 Road (SamayanallurFourline Crossing)	LS 44350 M	1400 mm MS Pipe	Permission Obtained.Demand received for Rs.0.04 Cr to be remitted to the Project Director, NHAI ,Madurai.	Amount to be paid to get the permission.
10	Vaigai River Bund Service Road Samayanallur	LS 44350 M	Thekkathir Bridge	LS 54435 M	1400 mm MS Pipe	Permission Obtained.Demand received for Rs.0.04 Cr to be remitted to the EE, WRD/PWD, Madurai.	Amount to be paid to get the Permission.

Status Note on Safety Aspects Related to Associated Facility

Tamil Nadu Urban Flagship Improvement Project (TNUFIP) - Madurai Water Supply Improvement Scheme Proposed in Tranche 2

Status Note on Safety Aspects Related to Associated Facility – The Mullai Periyar Dam

A. SUBPROJECT PROFILE

- Subproject involves augmentation of water supply to Madurai Municipal Corporation.
- Releases from Mullaperiyar Dam abstracted at Lower Camp is the source of raw water for this subproject.
- Subproject scope involves abstraction of 130 MLD raw water with check dam and river intake arrangement, pumping based raw water transmission, WTP of 125 MLD clear water capacity and gravity based clear water transmission to 37 OHTs in Madurai City including SCADA arrangement.
- Distribution system improvement (per ULB as indicated in revised DPR) is under review at GOTN level for funding through parallel financing arrangement (not under scope of ADB TNUFIP).

B. MULLAIPERIYAR DAM DISPUTE

- Mullaperiyar Dam is in the state of Kerala, but is owned and operated by the state of Tamil Nadu on a long term lease agreement between the states.
- The dam was constructed during 1887-1895. Its Full Reservoir Level (FRL) is 152 ft and it provides water through a tunnel to Vaigai basin in Tamil Nadu for irrigation benefits in 68,558 hectares area.¹
- In 1979, Government of Kerala citing safety concerns of the dam due to observed leakages through the structure, requested Government of India to depute a team from Central Water Commission, the apex water resources organization of India, to inspect the dam. Upon inspection and subsequent joint meeting held, it was felt that some strengthening works are required and in the meantime, it was recommended to maintain water level in the reservoir at 136.00 ft. After undertaking emergency and medium-term strengthening measures, in subsequent meeting held in 1980, it was opined that water level in the reservoir can be restored up to 145 ft. (44.2 m).²
- However, restoration of FRL to pre-1979 period and safety concerns of the dam has been part of an inter-state dispute between the State Governments of Kerala and Tamil Nadu.
- Honorable Supreme Court (SC) of India through Order in W.P.(C) No. 386/2001 dated 27 February 2006 and subsequently through Order dated 7 May 2014 “ORIGINAL SUIT NO. 3 of 2006” permitted Govt. of Tamil Nadu to raise the water level from 136.00 ft. to 142.00 ft and ultimately to 152.00 ft after completion of further strengthening measures on the Mullaperiyar Dam.³ Though after the 2006 order of the SC, the state legislature of Kerala had passed the Irrigation and Water Management (Amendment) Act that fixed the maximum water level of Mullai Periyar Dam to 136 feet, but this act was declared unconstitutional by the SC Order of May 07, 2014. Kerala has also made an offer to build a new dam and subsequently

¹ Ministry of Water Resources, River Development & Ganga Rejuvenation, Government of India – Note on “Mullaperiyar Dam Issue” URL ref.:

² Para.4, Page 2 of 158 and Para.5, Page 3 of 158, Honorable Supreme Court of India Order dated May 07, 2014.

³ <http://mowr.gov.in/acts-tribunals/other-inter-state-water-disputes/mulla-periyar-dam-issue>
Para.199, Page 144 of 158, Point No.(iii), S.C. Order dated 7 May 2014.

decommission the existing dam, but Supreme Court maintained that this could be done only on mutual agreement and cannot be thrust upon Tamil Nadu.

C. SUPREME COURT ASSESSMENT OF THE SAFETY ASPECTS OF MULLAI PERIYAR DAM

Constitution Bench of Honorable Supreme Court of India, on 18 February, 2010, directed the Central Government of India to constitute an Empowered Committee (EC) under the chairmanship of Dr. A. S. Anand, Former Chief Justice of India and comprising of two members nominated by the States of Kerala and Tamil Nadu and two renowned technical experts.⁴

- The EC got investigations, tests and technical studies carried out through three apex organizations, besides other specialized organizations of the Government of India and, especially, expert agencies with a view to appreciate the diverse stand of the two States.⁵
- EC submitted the Report comprising eight chapters. Chapter VI comprises analysis and appraisal of ITS Report (Investigations, Tests and Studies) in the areas of A) Hydrological Safety; B) Structural Safety; and C) Seismic Safety.⁶ Details of tests performed are also included in reference paragraph.
- EC has summarized its conclusions on the three aspects namely;
 - (i) **Hydrologic Safety** – “The Mullaiperiyar Dam is found hydrologically safe” with reference to Probable Maximum Flood (PMF) and FRL.⁷
 - (ii) **Structural Safety** - Both the main and Baby Dam (gravity and earth), are structurally safe. FRL can be restored to the pre-1979 position. Maintenance and repair measures to be carried out in a time-bound manner are also specified.⁸
 - (iii) **Seismic Safety** - MPD is found to be seismically safe for FRL 152 ft (46.33 m) / MWL 155 ft (47.24 m) for the identified seismic design parameters with acceleration time histories under 2-D FEM Analysis.⁹
- Govt. of Kerala subsequently challenged the EC Report and its conclusions.¹⁰ The Court did not find any merit in the objections of Govt. of Kerala challenging the findings and conclusions of the EC Report and concluded that “...there is no change in circumstances at all much less any drastic change in circumstances or emergent situation justifying the reopening of safety

⁴ Para.184, Page 132 of 158, S.C. Order dated 7 May 2014.

⁵ Para.184, Page 132 of 158, S.C. Order dated 7 May 2014.

⁶ Para.188, Page 134 of 158 to Page 137 to 158 (incl.), S.C. Order dated 7 May 2014.

⁷ “A) Hydrologic Safety” #23, Para.195, Page 140 of 158, S.C. Order dated 7 May 2014.

⁸ “B) Structural Safety” #24, Para.195, Page 140 of 158, S.C. Order dated 7 May 2014 - Maintenance and Repair measures viz. i) treatment of upstream surface, ii) reaming of drainage holes, iii) instrumentation, iv) periodical monitoring, analysis and leading away the seepage from toe of the dam towards downstream, v) geodetic re-affirmation, etc., vi) the dam body should be grouted with a properly designed grout mix of fine cement / suitable chemical / epoxy / polymer according to expert advice so that its safety continues to remain present.

⁹ “C) Seismic Safety” #25, Para.195, Pages 140 and 141 of 158, S.C. Order dated 7 May 2014.

¹⁰ Para.195, Pages 141 and 142 of 158, S.C. Order dated May 07, 2014.

aspect of Mullaperiyar dam which has been determined by this Court in the earlier judgment.”¹¹

D. DECISION OF SUPREME COURT ON IRRIGATION AND DRINKING WATER REQUIREMENT

- Kerala argued in SC that Tamil Nadu has not suffered any injury due to reduction in storage by maintaining the FRL at 136.00 ft from 1979 and that in fact the area under irrigation has increased post 1979 period.
- But Tamil Nadu maintained that raising water level in the dam to original FRL is necessary to irrigate lands in five drought-prone districts of Theni, Dindigul, Madurai, Sivagangai and Ramanathanpuram. GoTN also stressed that not only 680,000 farmers and agricultural labourers but also 8 Million people of the above five districts shall continue to suffer due to inadequate timely supply of water for irrigation and drinking purposes if the dam level is maintained at 136 ft.
- EC considered the above aspects and observed that;
 - (i) Increase in irrigation in Vaigai Basin was mainly due to i) Construction of Vaigai Dam (1954) and related canal distribution system (1974), ii) World Bank funded Modernization of Periyar Vaigai Irrigation Project – Phase I & II (1980s).
 - (ii) There is still large drought-prone area in Vaigai Basin and adjoining area, which needs protective irrigation. Also domestic / municipal / industrial needs of the area are significant. These present requirements remain unmet, if FRL is not restored even partially.¹²
 - (iii) Further, the EC has also observed that “the inadequate timely water supply of water for irrigation and drinking purposes to the population of the above mentioned 5 districts may affect their lives as well as livelihood. The increase of irrigation and more drawal of water post 1979 still appears to be deficient for the population of more than 8 million people in these districts”.¹³

E. APPOINTMENT OF SUPERVISORY COMMITTEE

- Honorable Supreme Court of India, through the Order dated 7 May 2014, has directed formation of a three (3) member Supervisory Committee. Para 222 of above SC Order states that “However, to allay the apprehensions of Kerala - though none exists - about the safety of the Mullai periyar dam on restoration of the FRL to 142 ft., a 3-Member Supervisory Committee is constituted”.
- The Committee shall have one representative from Central Water Commission and one representative each from the two States, Tamil Nadu and Kerala. The representative of Central Water Commission shall be the Chairman of the Committee.
- The powers and functions of the Supervisory Committee shall be as follows:

¹¹ Para.198, Pages 143 of 158, S.C. Order dated 7 May 2014.

¹² Para.218, Pages 153 and 154 of 158, S.C. Order dated 7 May 2014.

¹³ Para.219, Page 154 of 158, S.C. Order dated 7 May 2014.

(i) The Committee shall supervise the restoration of FRL in the Mullai periyar dam to the elevation of 142 ft.

(ii) The Committee shall inspect the dam periodically, more particularly, immediately before the monsoon and during the monsoon and keep close watch on its safety and recommend measures which are necessary. Such measures shall be carried out by Tamil Nadu.

(iii) The Committee shall be free to take appropriate steps and issue necessary directions to the two States - Tamil Nadu and Kerala – or any of them if so required for the safety of the Mullai periyar dam in an emergent situation. Such directions shall be obeyed by all concerned.

(iv) The Committee shall permit Tamil Nadu to carry out further precautionary measures that may become necessary upon its periodic inspection of the dam in accordance with the guidelines of the Central Water Commission and Dam Safety Organization.

- In accordance with directions of the Honorable Supreme Court, the Cabinet has accorded its approval on 18 June 2014 for setting up of the Supervisory Committee on Mullai periyar Dam with the following members:¹⁴

(i) Chairman ex-officio - Chief Engineer, Dam Safety Organisation, Central Water Commission

(ii) Member ex-officio - Principal Secretary, Public Works Department, Govt. of Tamil Nadu.

(iii) Member ex-officio – Additional Chief Secretary, Water Resources Department, Govt. of Kerala


F. CONCLUSION

- Based on the aforementioned details provided, it can be reasonably inferred that aspect of dam safety, has been adequately considered by the Honorable Supreme Court (S.C.) while arriving at its order dated May 07, 2014.
- As per directions of the Honorable Supreme Court of India, Government of India has subsequently constituted the Supervisory Committee with defined structure, roles and responsibilities to carry out periodic inspections and recommend safety and strengthening measures as required.¹⁵
- Further, S.C. Order dated 7 May 2014 also highlights the need for water for irrigation and drinking requirements of the drought prone five districts in Tamil Nadu. (Madurai included) which can be met through the ordered increase of the FRL.

¹⁴ Government of India, Ministry of Water Resources, River Development & Ganga Rejuvenation (Peninsular River Wing), Office Memorandum No.R16011/6/2014 – Pen. River/ 47 dated 01 July 2014.

¹⁵ Supervisory Committee has resolved to locate the office at Kumily, Kerala. Six meetings of the Supervisory Committee on Mullaperiyar Dam have already been held as specified in S. No.14, Ref. URL: <http://mowr.gov.in/acts-tribunals/other-inter-state-water-disputes/mulla-periyar-dam-issue>.

Map Showing the Distance from Forest Area and Proposed Project

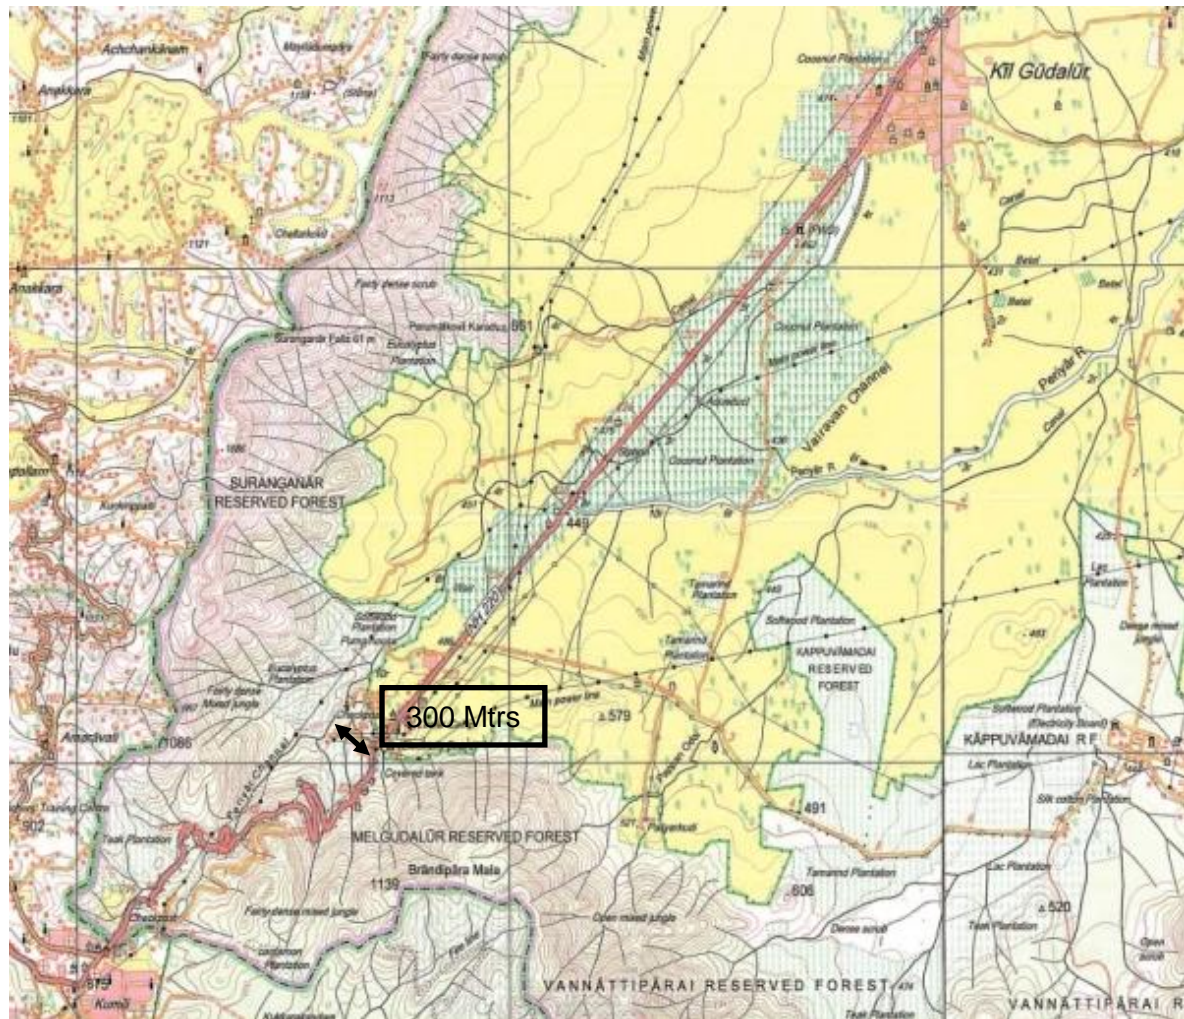

Existing Water Supply System

1. Water Supply and Sewerage System: The Madurai Municipal Corporation Water Supply is vested with the responsibility of

- (i) Promoting and securing the planned development of water supply and sewerage services, creation, operation and maintenance of the needed infrastructure and
- (ii) Implementation of perspective plans to meet both current and future requirements in the areas falling under the city limit.

2. Sources of Water for Madurai City. The Madurai Municipal Corporation supplies water to the Core city from Vaigai Dam and sub- surface water supply schemes on Vaigai River.

Table A14.1: Treatment Capacity of Water Treatment Plant

S. No.	Name of Source/Scheme	Type of Source	Present Supply (MLD)	Remarks
Scheme-I				
1	Kochadai	Infiltration Galleries	8.46	Sub-Surface Water/Ground Water
2	Kochadai	Collector Well		Not Functioning
3	Thachampathu Melakkal WSS	Infiltration Galleries	14	Sub-Surface Water/Ground Water
Scheme-II				
4	Manalur and Thiruppuvanam	Collector Wells	7	Sub-Surface Water/Ground Water
Vaigai Water Supply Scheme				
5	Vaigai WSS, Line-I	Intake Well Vaigai Dam	68	Surface Water
6	Vaigai WSS, Line-II	Intake Well Vaigai Dam	47	Surface Water
Scheme-III				
7	Vaigai River bed Sources	Infiltration wells	17.54	Sub-Surface Water/Ground Water
Scheme-IV				
8	Melur CWSS	Collector Wells in River Cauvery	30	Sub-Surface Water/Ground Water
	Total		192	--

Table A14.2: Storage Capacity of Reservoirs Supplying Water to Madurai

S. No.	Service Reservoir	Storage Capacity (in Lakh Litre)
1	Semparuthi Nagar –NZ1	18
2	Muthuramalinga Puram Bykara	5
3	Moolakarai Sump – SZ9 (Muthuramalingapuram)	3
4	Muniyandi Kovil street	4

S. No.	Service Reservoir	Storage Capacity (in Lakh Litre)
5	Balaji Nagar – SZ12	5
6	Harvipatti – SZ10	10
7	Kurinchi Nagar – SZ11(Thirunagar)	5
8	Muthupatti Nagar near PS	20
9	TVS Park Sathya sai Nagar	25
10	TVS Park Sathya sai Nagar	25
11	Villapuram – SZ6 (Ward – 61)	10
12	MMC Colony –SZ 5	15
13	MMC Colony –SZ4	10
14	Vellakkal – SZ8	11
15	Vaalaithoppu Corporation Ground	25
16	Chinna Anuppanadi –SZ2	15
17	Gurunathar Koil – S Z3 (Chinnthamani)	12
18	Thideer Nagar	30
19	Sellur Kanmai – Composting yard Sector 6 (Singarayar Colony)	25
20	Sellur Kanmai – Composting yard Sector 6 (Kattabomman Street (Sivagami Street))	25
21	Indranagar – NZ2	15
22	Park Town – NZ5	13
23	EB Colony – NZ7	18
24	Poriyalar Nagar	7
25	Bharath Nagar	20
26	Island Nagar – NZ8	12
27	Sellur Lorry Stand	30
28	SMP Colony near Mayor Bungalow (MPS site)	10
29	Shenpagathottam – NZ 14	25
30	KK Nagar (Central Veg. Market)	12
31	Kochadai back side of Pumping station	25
32	VKP Nagar Madakulam	20
33	Arappalayam Two wheeler Parking	12
34	AVSS Hospital behind MPS Santhaipeitai	20
35	Meenakshi Nagar	15
36	Ulaganeri – NZ 11 (Ward – 28)	12
37	Pandian Nagar – NZ12	25
	Total	589

Table A14.3: Quality Standards of Raw Water and Treated Water

S. No.	Parameters	Raw Water Range	Treated water range
1	pH	7.5	7.1
2	TDS	154	159
3	Turbidity	6.0	0.4
4	Total Hardness	96	90
5	Total Alkalinity	90	86
6	Total Chloride	16	19
7	Residual Chlorine	1.6	6.2
8	Sulphates	7	3
9	Iron	Nil	Nil
10	Fluorides	Nil	Nil





Improvements Made

Under JnNURM funds, three numbers of check dams were constructed in River Vaigai at the following locations:

- (i) Melakkal -To recharge the wells near Melakkal and Thatchampathu.
- (ii) Kochadai - To recharge the wells & Gallery in Kochadai.
- (iii) Thiruppuvanam - To recharge the collector wells in Manalur & Thiruppuvanam.

Vaigai Water Supply Scheme

In this scheme intake well is located about 1.5 km downstream of Vaigai dam on the Vaigai River near Pickup weir. Full yield / supply throughout the year can be obtained through the scheme. This scheme was implemented as Line-I and Line-II in the year 1995 and 2009 respectively. Line-I, having design capacity of 68 MLD, supplies water to the south of River Vaigai (51 Wards) and Line-II with design capacity of 47.00 MLD supplies water to North of River Vaigai (21 Wards) of the Core City Madurai Municipal Corporation. The Corporation is getting about 115 MLD water from the scheme. Schematic of this scheme is shown below.

	
<p align="center">Vaigai Dam</p>	<p align="center">Existing Intake Wells</p>
	
<p align="center">Collection Well cum Inspection Tower</p>	<p align="center">a) View of the Cascade Aerator</p>

Madurai Municipal Corporation is mainly depending on Vaigai Dam surface water as source for its drinking water supply needs. As per the Government Order 1500 MCFT /year of water from Vaigai Dam is allotted to Madurai Municipal Corporation for Drinking water supply purpose. The complete quantity of 1500 MCFT / year is now drawn from Vaigai Dam through pipe lines.

Transmission Mains

Raw water from scheme Line - I & Line - II for Vaigai WSS from Vaigai Dam are conveyed to the WTP at Pannaipatti by gravity, through 1100mm PSC transmission main for a length of 16.60 km. Similar to the existing scheme, for the proposed third water supply scheme, raw water from Vaigai Dam is conveyed to the proposed WTP at Pannaipatti through 1067 mm X 8.8 mm thick mild steel pipes for a length of 16.85 km.

In the second water supply scheme, for conveying 47 MLD 1100 mm PSC pipes were designed and executed similar to the first water supply scheme of capacity 71.6 MLD with the hope of getting additional quantity of water from Vaigai Dam. In the above pipe line some leaks were observed in the alignment and the raw water is allowed to bypass the aerator to reduce the number of leaks and to improve the drawal. In the raw water alignment, people who involved in agricultural field, try to tamper the valves and joints when the monsoon fails.

Water Treatment Plant

The existing water treatment plant for Madurai Municipal Corporation was commissioned in the year of 1995 at Pannaipatti village located 16.60 km away from Vaigai reservoir. The capacity of WTP is 118.6MLD (71.60MLD for Line-I & 47.00 MLD for Line-II). The treatment facility is based on the conventional system comprising Aeration, Clariflocculation and Rapid Sand Filtration. The details of Water Treatment Plant are shown below:



	
Existing WTP	b) Existing Filter Beds

Table A14.4: Details of Water Treatment Plant

S. No.	Components	Description
I	Water Treatment Plant	
1	Components	Cascade Aerator – 2 No (10 m Dia Collection tray) Stilling Basin -2 (6x4x3.3m)

S. No.	Components	Description
		Dividing Well – 6m Dia
		Flash Mixer – 4 No's – 3.8 m Dia, 4.05m depth
		Clariflocculator -2 no's (with Tube Settlers)
		Rapid Sand Filter Beds -12 No's (4mx6m) (Dual Media Filters)
		Clear water sump -30 LL and 35 m Dia
2	Capacity of WTP	118.6 MLD
II	Clear Water Reservoir	
1	Capacity	30 Lakh Litres
2	Diameter of Sump	35 m
3	Depth of Sump	2.4 m

A critical component in the water supply improvement scheme is the treatment of surface water drawn from Vaigai Dam Reservoir through installation of water treatment facility. Madurai Municipal Corporation has been allotted 1,500 MCFT / year of water for drinking purposes. Out of this allotment, 900 MCFT / year is being drawn through raw water gravity main and treated at a full scale of 71.60 MLD Water Treatment Plant at Pannaipatti installed as part of a World Bank project in the year 1995.

For the treatment of 600 MCFT/year (47MLD) of water, the already functioning Treatment plant of capacity 71.6 MLD was upgraded to 118.6 MLD by introducing tube settlers in the existing Clariflocculators and by providing dual media with anthracite coal as filter media in addition to the sand in the existing filter beds. The treatment plant is now capable of handling 118.6 MLD of raw water

Clear Water Transmission Main

The clear water from Pannaipatti WTP is conveyed to Arasaradi pumping station and also for few service reservoirs by gravity and then water is distributed to different service reservoirs from the pumping station. Clear water is transmitted to main pumping station (Booster pumping station) by gravity, through 48.80km along 1100mm Φ and 1000mm Φ PSC mains under Line – I and Line – II respectively. Details of clear water transmission main for Madurai Municipal Corporation laid under Vaigai scheme (Line – I and Line – II) is given.

Table A14.5: Details of Clear Water Transmission Mains

S. No.	Components	Description Line-I	Description Line-II
1	Type of main	Gravity main	Gravity main
2	From	Pannaipatti WTP	Pannaipatti WTP
3	To	Madurai Municipal Corporation (Arasaradi)	Madurai Municipal Corporation
4	Dia (mm)	1100	1000/900/800
5	Length (km)	48.8	48.8
6	Capacity (MLD)	68	47
7	Material	PSC	PSC/GRP

S. No.	Components	Description Line-I	Description Line-II
8	Break pressure tank (lakh litres)	5.0	5.0
9	Year of laying	1995	2009

Pumping Machinery

The details of pumping machinery from source to distribution are presented in the following Tables.

Table A14.6: Details of Pumping Machinery at Source

S.No	Location of Pumps	YOC	Pumps/Motors	No's	Age(Years)
1	Kochadai WSS-I	1924	170HP	2	>40
2	Kochadai WSS-I (Collector Well)	1963	135HP	23	>40
3	Melakal WSS	1963	60HP	2	47
4	Manalur and Thirupuvanam WSS	1983	25HP	2	20
		1983	40HP	2	20
		1983	230HP	2	20
5	Thachampattu	1983	7.5HP	6	5

Table A14.7: Details of Pumping Machinery at Booster Station

S. No.	Location	Particulars	No's	Motor Details	Pump Details	
					Rated Discharge (LPM)	Rated Head(m)
1	Arasaradi Booster Station	South Zone Feeder	1W+1S	120HP	10896	24
2	Arasaradi Booster Station	North Zone Feeder	1W+1S	150HP	9500	49
3	Arasaradi Booster Station	North Zone Feeder (VWS Scheme)	1W+1S	270HP	19000	49

Service Reservoirs

The Water from Vaigai Dam Reservoir is supplied to North and South zones of Madurai City. The northern part of Madurai i.e., the area above the Vaigai River is called North zone and the area

below Vaigai River is called South zone. The entire distribution system is divided in to 28 zones. The North zone is divided in to 12 water distribution zones and whereas the South zone consist of 16 distribution zones. The water supply for the city is getting potable water from 28 numbers of water reservoir/OHT's having different capacities. The total storage capacity of the OHT's is 394.5 LL and the details of service reservoirs are given in the Table 8.

Table A14.8: Details of Existing Service Reservoirs

S. No.	Name of the OHT	Capacity (LL)	Year of Const.	MWL (m)	LWL (m)	Avg. GL (m)	Staging Height (m)
North of River Vaigai (21 Wards)							
1	Aruldasapuram	20.00	1992	161.20	157.20	143.20	14
2	Sellur	13.60	1975	158.10	154.10	142.60	12
3	Rajaji Park	18.16	1975	155.50	151.50	139.60	12
4	Anna Nagar – I	2.30	1975	150.43	146.43	134.43	12
5	Anna Nagar – II	6.00	1992	150.43	146.43	134.43	12
6	K.K. Nagar	8.00	1992	155.1	152.10	140.10	12
7	Lotus Tank	1.00	1990	150.8	147.8	140.3	12
8	K. Pudur	15.00	1975	156.02	152.02	140.02	12
9	Race Course	6.80	1975	158.5	154.5	142.5	12
10	Reserve Line	20.00	1992	168.20	164.2	146.20	18
11	Maruthankulam	5.00	2005	159.60	156.10	140.10	16
12	P&T Nagar	10.0	2005	170.12	166.12	150.12	16
	Total Storage	126.00					
South of River Vaigai (51 Wards)							
1	Kochadai	15.00	1992	157.62	153.62	138.62	15.00
2	Palanganatham	25.00	1992	153.50	149.40	134.40	15.00
3	Arapalayam	30.00	1992	158.00	154.00	134.68	19.30
4	Sunday Market I	10.00	1992	149.17	145.67	131.67	14.00
5	Sunday Market II	10.00	1992	149.17	145.67	131.67	14.00
6	Tamil Sangam Road	20.00	1992	151.67	147.67	132.67	15.00
7	East Marret Street	20.00	1992	150.00	146.00	131.37	14.60
8	Traveler's Bungalow	30.00	1992	154.00	150.00	131.50	18.50
9	Joseph Park I	15.00	1975	153.50	149.50	129.50	20.00
10	Joseph Park II	15.00	1992	153.00	149.00	129.50	19.50
11	New Ramnad Road	15.00	1992	147.90	143.90	129.90	14.00
12	Jhansi Rani Park	20.00	1975	156.00	152.00	137.00	15.00
13	Arasaradi	11.50	1975	150.40	146.40	136.35	10.05
14	H.M.S.Colony	16.00	2005	165.19	161.19	145.19	16
15	Sundararajapuram	16.00	2005	160.05	156.05	140.05	16
16	Keeraithurai	16.00	2005	157.01	153.01	137.01	16
	Total Storage	284.50					

Water Distribution System

The potable water supply network covers about 59% of the households in the Madurai Municipal Corporation. The existing water supply consists of about 764km long pressurized pipe network. The distribution system in Madurai Municipal Corporation consist of CI, AC, PVC and PSC pipes with diameter varies from 63mm to 150mm and 1/2inch house service connections are provided to all legal connections. The condition of the pipes in certain areas (core area of the city) is reported to be poor and the carrying capacity reduced due to deposits (incrustation) especially in CI pipes. This may lead to incrustation, friction losses and loss of pressure at the tail end of the distribution network.

House Service Connections: The details of the house service connection are given in the Table 9.

Table A14.9: Details of House Service Connection

S. No.	Type of Connection	No. of Connection
1	Domestic	299127
2	Non-Domestic	24969
	Total	324096

Table A14.10: Anticipated House Service Connections

SI.NO.	Details	Nos.
1	Total Number of Assessments in entire city	324096
2	Existing HSC in project area	160306
3	Proposed New HSC in project area	163790
4	Total no of HSC in project area – Phase II - Proposed	118584
5	Total no of HSC in project area – Phase I	45532
6	Total no of HSC in project area – Phase III	159980

Table A14.11 : Breakup of House Service Connections(Proposed)

Area	Existing	Proposed	Total
In sq. feet	No. of assessments in the Project Area	No. of assessments in the Project Area	
<=500	67329	68792	136121
501 -1200	59314	60602	119916
1201-2400	24046	24568	48614
>=2401	9618	9827	19445
Total	160306	163790	324096

O&M of the Existing Distribution System

The Madurai Municipal Corporation does the O&M of Water distribution system. Regular records for the valve operations, water levels in towers, water quality are maintained and inlet–outlet meter management are done by this department.

One of the major problems reported in the distribution system is un-equitable supply of water to different parts of a distribution zone. It is observed that the distribution system for a length of about 490Km is more than 30 to 40 years old and these pipes are with incrustations resulting friction and reduction in pressure and flow and also they are very susceptible to damage. It is proposed to revamp the existing distribution system as well as new distribution system for the newly encompassed area (the newly encompassed area not having integrated distribution system).

Water Tariff Structure

The monthly water tariff for domestic house service connection, non-domestic connection as well as for commercial connections is charged on a flat rate as follows.

Table A14.12: Details of Water Tariff

S. No.	Type of Connection	Monthly Charges	Deposit Charges (Rs.)	Connection Charges (Rs.)
1	Domestic	75	3000	75
2	Non-Domestic/ Intuitionial	150	10000	150

Table A14.13 : Revenue Generation for Over all City (Phase –I, II & III)

Details	Existing (Crores)	Proposed (Crores)	Total (Crores)
O & M cost	10.82	10.54	21.35*
Revenue through Deposit	0	46.15	46.15
Total Revenue through Tariff	13.08	13.84	26.92

* After deduction of Overlapping between Existing and Proposed O&M Expenditures.

Overhead Tanks Details

OHT No	Location Name	Ward name/no.	Land detail Khasra no	Classification	Ownership department	Tank Capacity	Area available (in acres)	Area required (in acres)	North, South, East, West side bounded details
1	Semparuthi Nagar –NZ1	8	TS No. 187/15, 187/6	Vacant Site	MMC	18	0.71	0.15	N – Vacant Area E – Residential W – Residential S – Vacant Area
2	Muthuramalinga Puram Bykara	100	TS No. 35/1A	Vacant Site	MMC	5	0.55	0.50	N – EB Sub Station E – Residential W – Vacant Area S – Private Land
3	Moolakarai Sump – SZ9 (Muthuramalingapuram)	99	TS No. 44, 45	Vacant Site	MMC	3	0.17	0.03	N – Vacant E – Vacant W – Vacant S – Existing Sump
4	Muniyandi Kovil street	100, 75	TS No. 482 XXII – 620	Existing Toilet & Vacant Site	MMC	4	0.28	0.05	N – Vacant Area E – Vacant Area W – Temple S – Vacant Area
5	Balaji Nagar – SZ12	99	TS No. 120	Vacant Site	MMC	5	0.56	0.05	N – Water Body E – Residential W – Residential S – Residential
6	Harvipatti – SZ10	97	TS No. 151	Vacant Site	MMC	10	0.36	0.10	N – Park E – Corporation Office W – Residential S – Residential
7	Kurinchi Nagar – SZ11(Thirunagar)	98	TS No. 105, 106	Vacant Site	MMC	5	1.01	0.05	N – Vacant Area E – Vacant Area W – Residential S – Residential
8	Muthupatti Nagar near PS	93	Rs No. 440/2, 2	Vacant Site	MMC	20	0.25	0.17	N – Existing Pumping Station E – Commercial Building W – Vacant Land S – Residential


9	TVS Park Sathya sai Nagar	77	TS.No. 88, 89	TVS Nagar Park	MMC	25	1.18	0.21	N – Commercial Building E – Commercial Building W – School S – Industry
10	TVS Park Sathya sai Nagar	77	TS.No. 88, 89	TVS Nagar Park	MMC	25	1.18	0.21	N – Residential E – Commercial Building W – School S – Industry
11	Villapuram – SZ6 (Ward – 61)	61	RS No. 411	Inside of Avaniyapuram WS Pumping Station	MMC	10	0.98	0.10	N – Corporation Building E – Residential W – Industry S – Industry
12	MMC Colony –SZ 5	94	TS No. 386	Vacant Site	MMC	15	4.78	0.13	N – Residential E – Vacant Area W – Proposed OHT S – Vacant Area
13	MMC Colony –SZ4	94	TS No. 386	Vacant Site	MMC	10	4.78	0.10	N – Residential E – Proposed OHT W – Residential S – Vacant Area
14	Vellakkal – SZ8	94	TS No. 156	Vacant Site	MMC	11	1.83	0.10	N – Vacant Area E – Vacant Area W – Vacant Area S – Corp Pump Station
15	Vaalaithoppu Corporation Ground	69	TS No. 2597	Vacant Site	MMC	25	0.51	0.21	N – Residential E – Railway Track W – Commercial Building S – Commercial Building
16	Chinna Anuppanadi – SZ2	56	RS No. 198	Vacant Site	MMC	15	0.36	0.13	N – Residential E – Vacant Area W – Vacant Area S – Vacant Area


17	Gurunathar Koil – SZ3 (Chinnthamani)	58	TS No. 103/1	Vacant Site	MMC	12	0.39	0.11	N – Urban Health Centre E – Vacant Area W – Temple S – Residential
18	Thideer Nagar			Vacant Site	MMC	30	0.44	0.22	N – Residential E – Residential W – Residential S – Residential
19	Sellur Kanmai – Composting yard Sector 6 (Singarayar Colony)	37	RS 101 to 105	Side of Compost Yard	MMC	25	1.01	0.21	N – Vacant Area E – Vacant Area W – Vacant Area S – Vacant Area
20	Sellur Kanmai – Composting yard Sector 6 (Sellur)	41	TS No. 3865	Vacant Site	MMC	25	0.48	0.21	N – Residential E – Residential W – Residential S – Residential
21	Indranagar – NZ2	23	Ts No. 73/4, 74/2	Side of Vilangudi Kanmoi	MMC	15	0.69	0.13	N – Industry E – Vacant Area W – Vilangudi Kanmoi S – Vilangudi Kanmoi
22	Park Town – NZ5	5	TS No. 3865	Meenakshi Nagar Park	MMC	13	0.39	0.12	N – Residential E – Existing OHT W – Residential S – Vacant Area
23	EB Colony – NZ7	24	TS No. 79/4	Vacant Site	MMC	18	0.27	0.11	N – Residential E – Vacant Area W – Residential S – Residential
24	Poriyalar Nagar	25	TS No. 158 (P)/160 (P) B	Vacant Site	MMC	7	0.41	0.078	N – Temple E – Kannanendhal Kanmoi W – Residential S – Residential
25	Bharath Nagar	25	TS No. 132/1	Vacant Site	MMC	20	0.39	0.17	N – Residential E – Residential W – Residential S – Vacant Area



26	Island Nagar – NZ8	48	TS No. 51/2	Vacant Site	MMC	12	0.27	0.11	N – Residential E – Vacant Area W – Residential & Temple S – Aathikulam Kanmoi
27	Sellur Lorry Stand	37	TS No. 1382/2(P)	Corp Lorry Stand	MMC	30	0.25	0.22	N – Lorry Stand E – Institution W – Residential S – Vaigai River
28	SMP Colony near Mayor Bungalow (MPS site)	33	TS No. 38/7 to 15	Vacant Site	MMC	10	1.24	0.10	N – Residential E – Exist Sewage Sump W – Residential S – Vaigai River
29	Shenpagathottam – NZ 14	33, 34	TS No. 42	Corp Park	MMC	25	0.78	0.21	N – Park E – Residential W – Commercial Building S – Residential
30	KK Nagar (Central Veg. Market)	44	TS No. 2236, 2737, 11/10	Vacant Site	MMC	12	0.95	0.11	N – Vacant Area E – Market W – Petrol Bunk S – Residential
31	Kochadai back side of Pumping station	22	TS No. 1/1V/15	Vacant Site	MMC	25	1.19	0.21	N – Vaigai River E – Vacant Area W – Residential S – Existing OHT
32	VKP Nagar Madakulam	75	TS No. 16/14	Vacant Site	MMC	20	1.11	0.17	N – Vacant Area E – Vacant Area W – Temple S – Vacant Area
33	Arappalayam Two wheeler Parking	15	TS No. 970	Vacant Site	MMC	12	0.45	0.11	N – Vaigai River E – Existing OHT W – Vaigai River S – Residential
34	AVSS Hospital behind MPS Santhaipettai	52	TS No. 11, V/17	Vacant Site	MMC	20	1.30	0.17	N – Vaigai River E – Residential W – Corporation Land


									S – Residential
35	Meenakshi Nagar	57	TS No. 187/15, 188(P)	Vacant Site	MMC	15	0.71	0.13	N – Corp School E – Vacant Area W – Residential S – Residential
36	Ulaganeri – NZ 11 (Ward – 28)	28	TS No. 21	Vacant Site	MMC	12	0.60	0.11	N – Residential E – Vacant Area W – Residential S – Water Body
37	Pandian Nagar – NZ12	29	RS No. 1 (Vandiyur 1 st Pit))	Vacant Site	MMC	25	0.29	0.21	N – Residential E – Residential W – Vandiyur Pond S – Vandiyur Pond

Overhead Tank Site Locations:

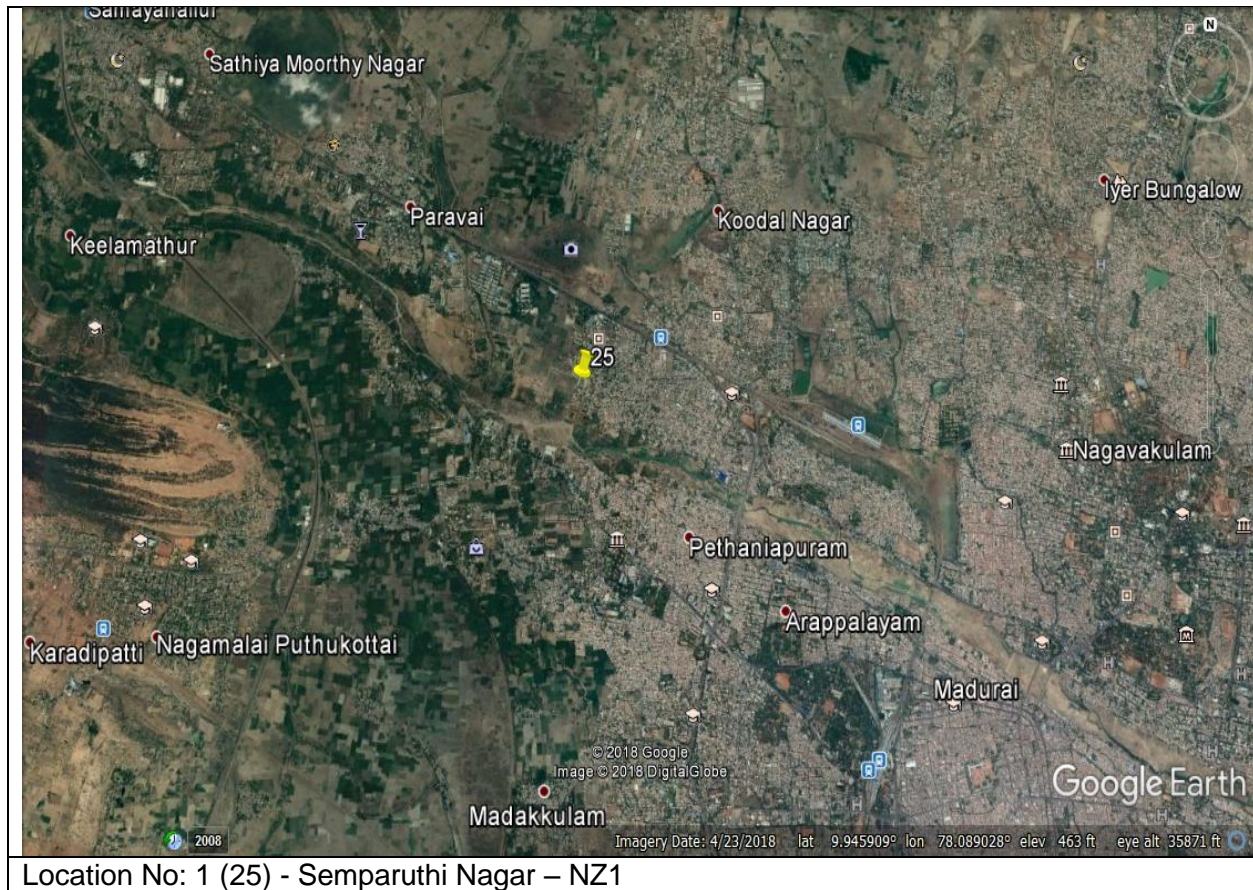


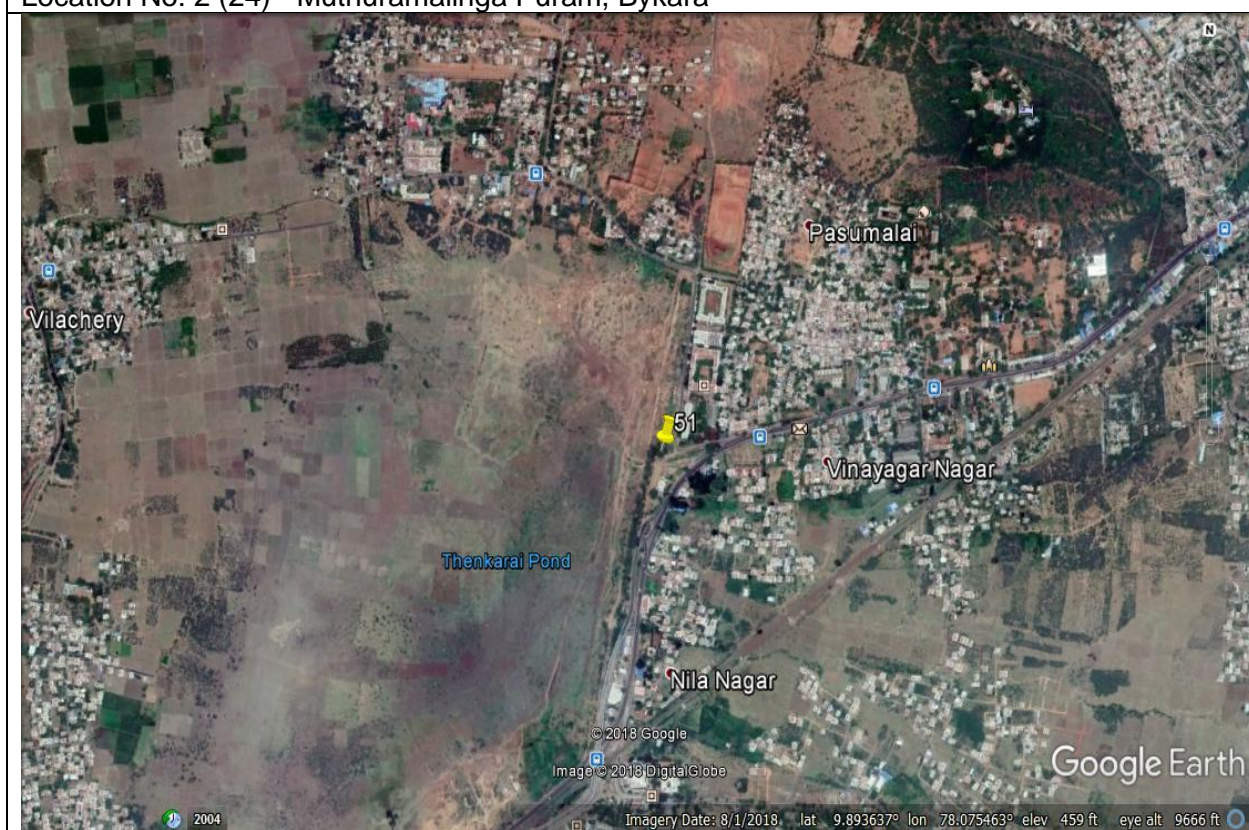

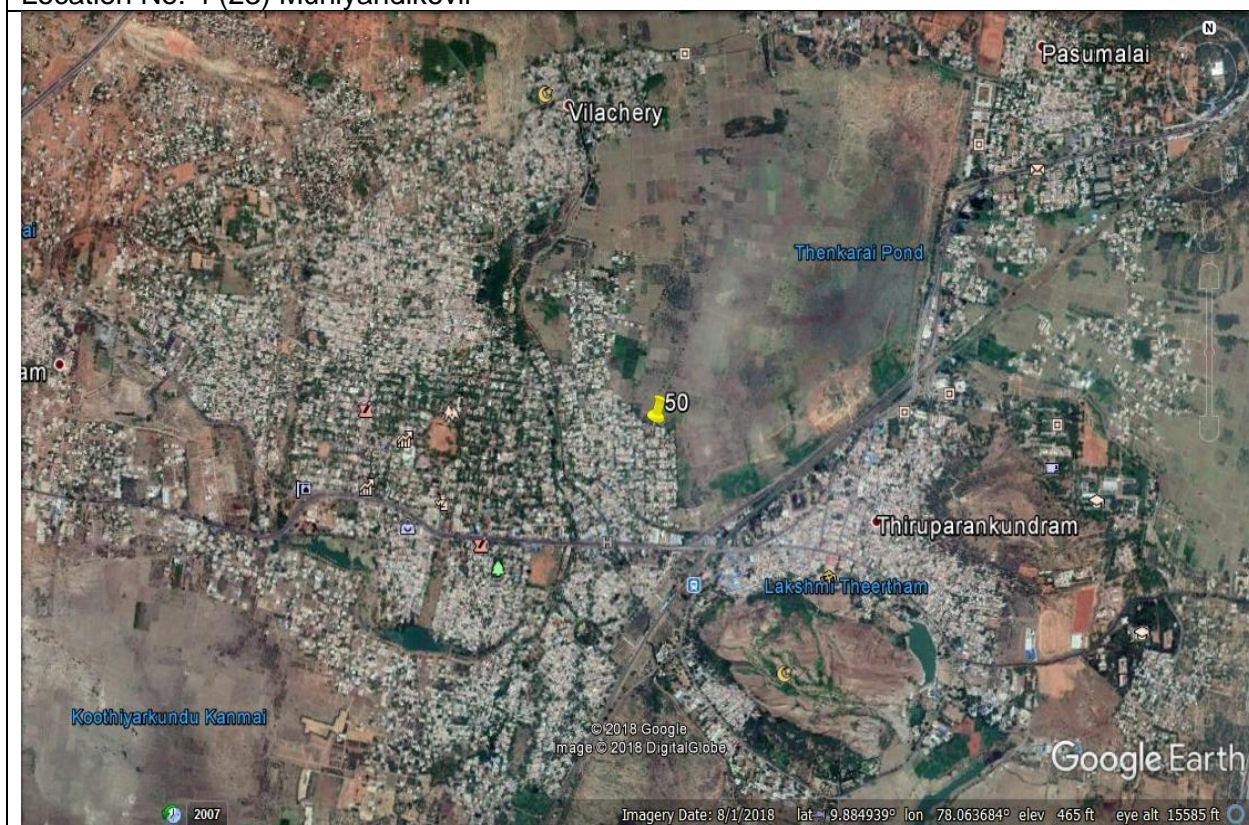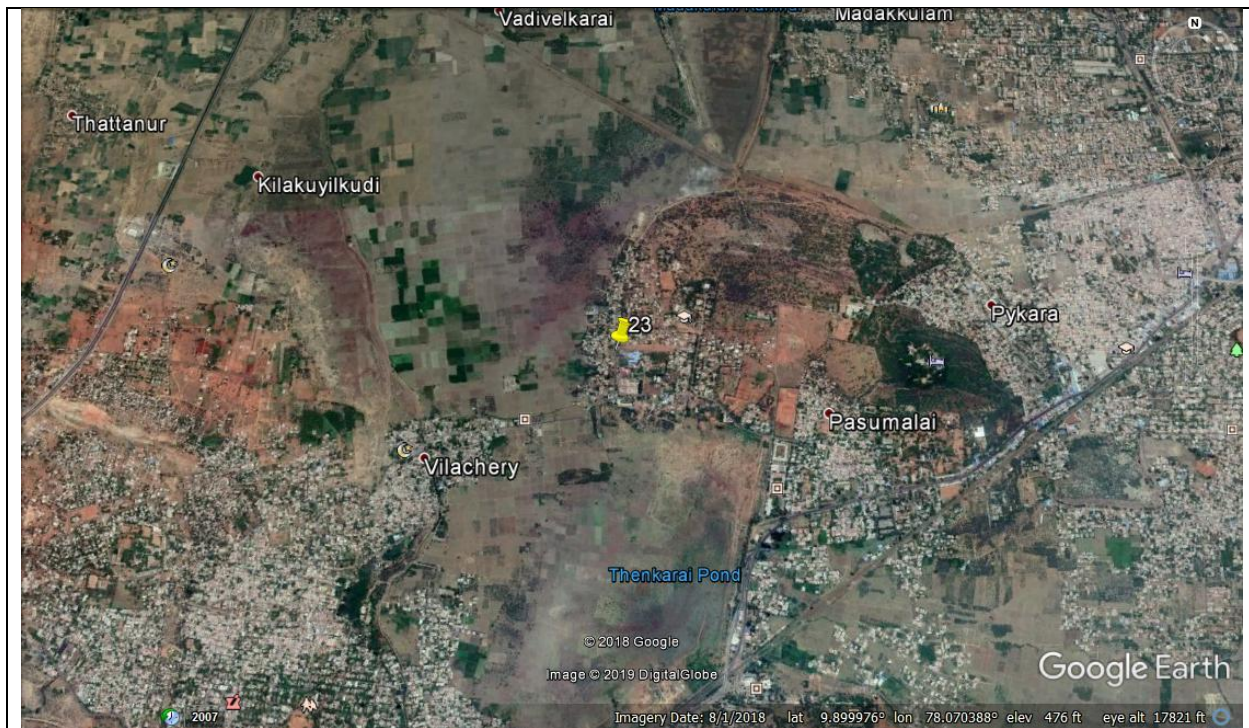


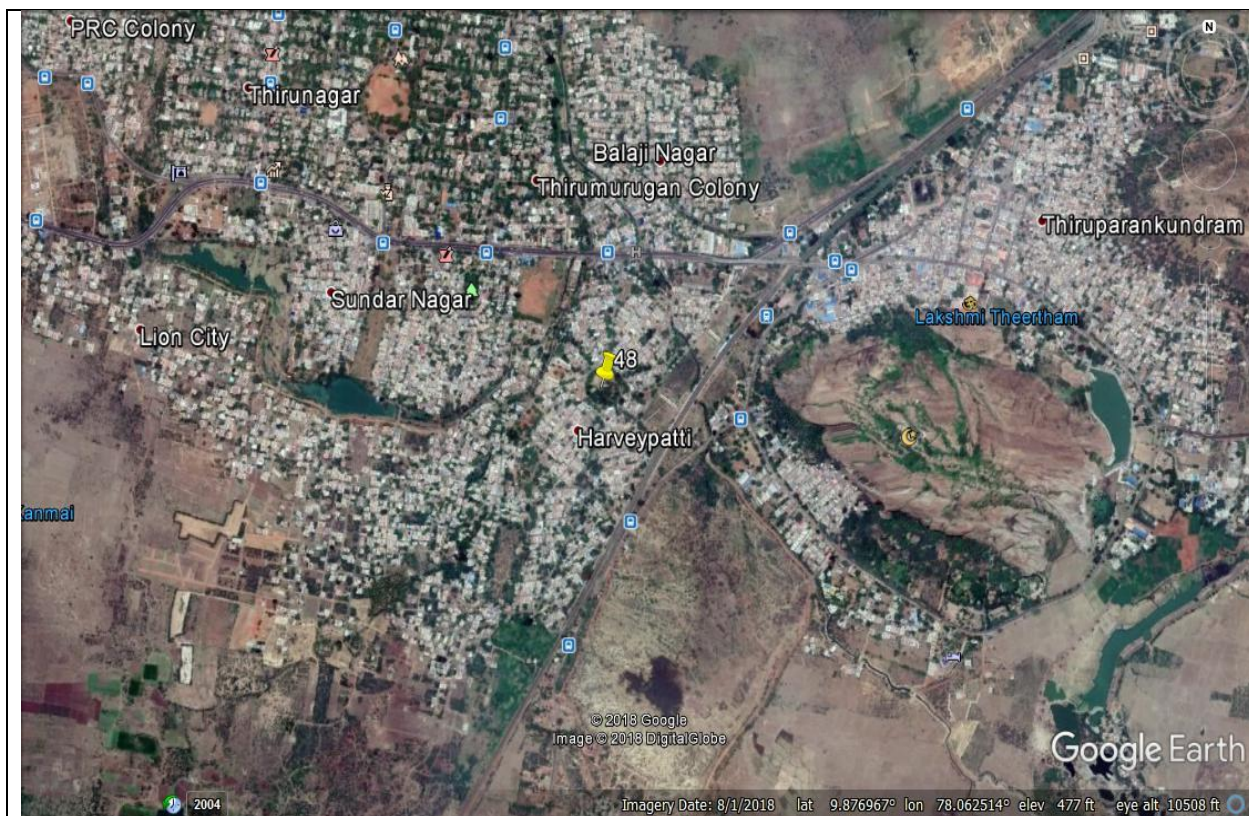


Location No: 6 (48) - Harvipatti – SZ10

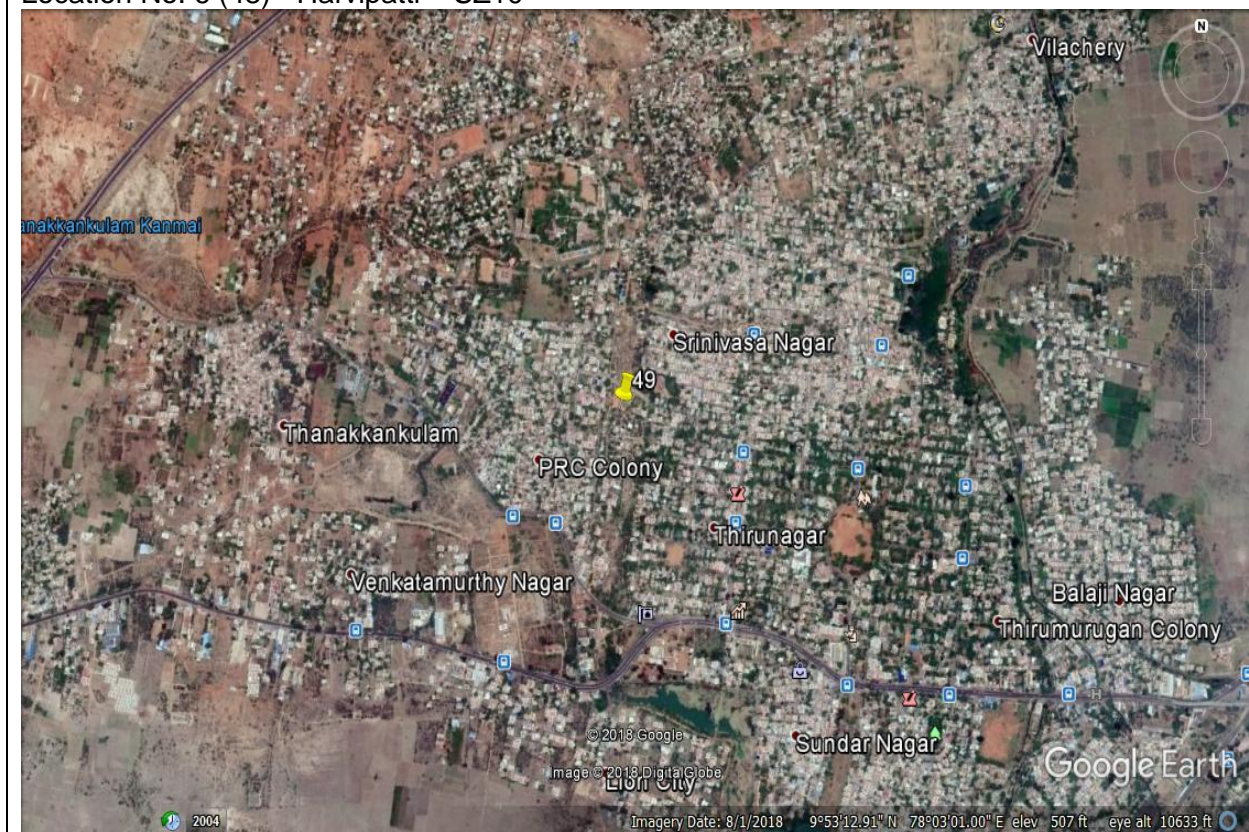


Location No: 7 (49) - Kurinchi Nagar – SZ11 (Thirunagar)

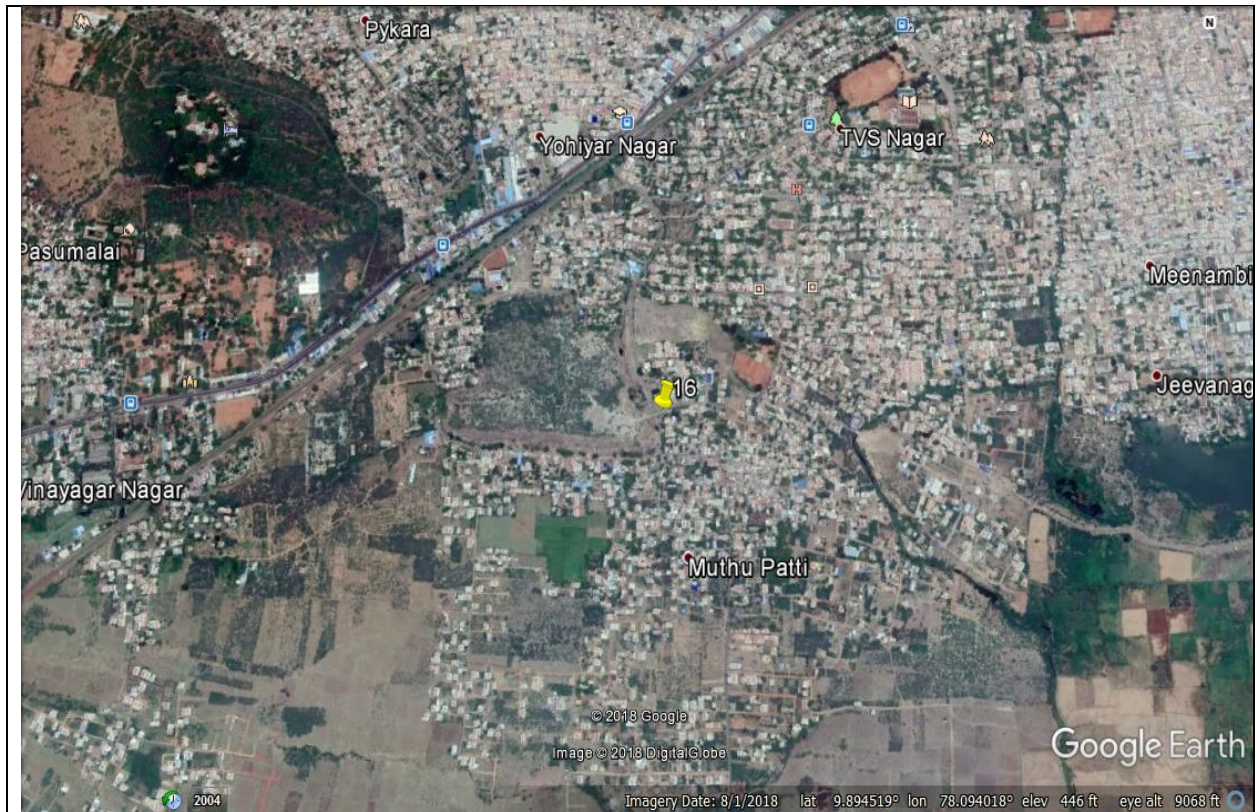


Location No: 8 (16) - Muthupatti Nagar near PS

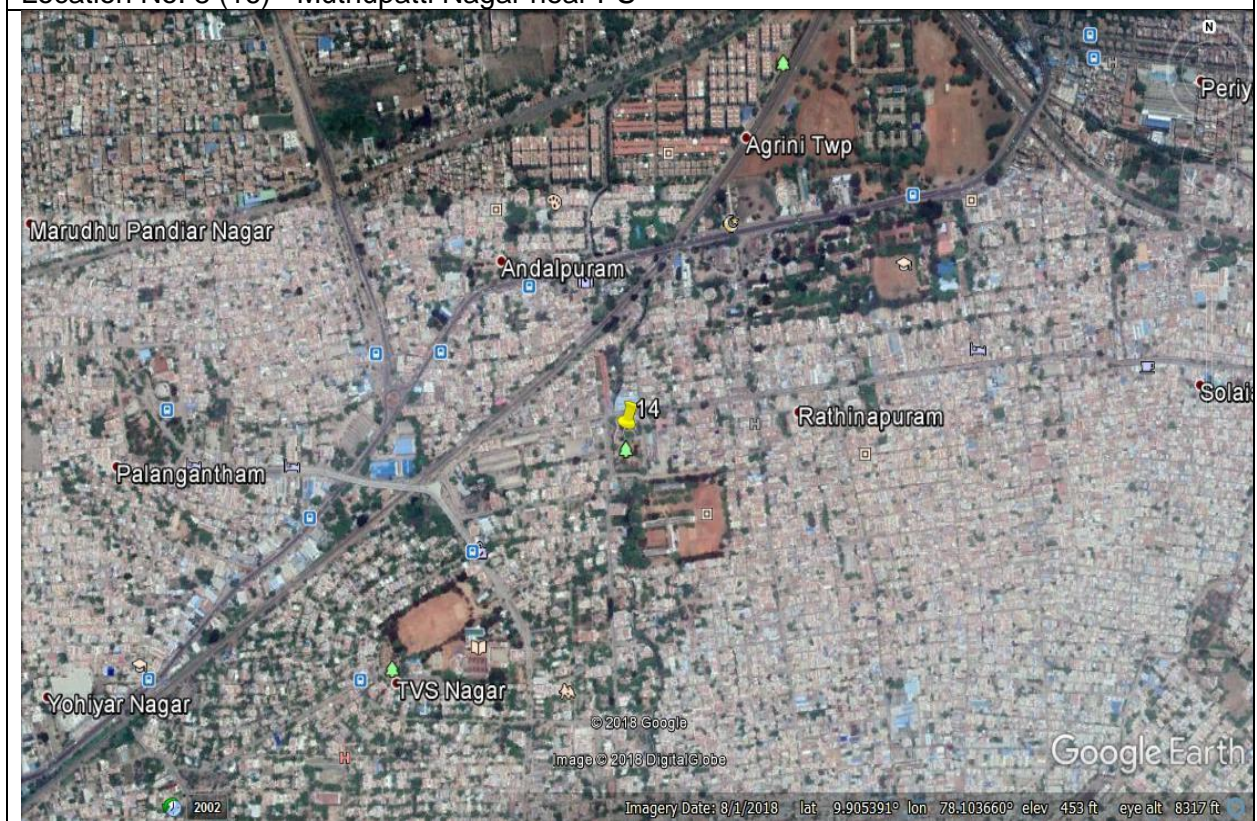


Location No: 9 (14) - TVS Park Sathya sai Nagar

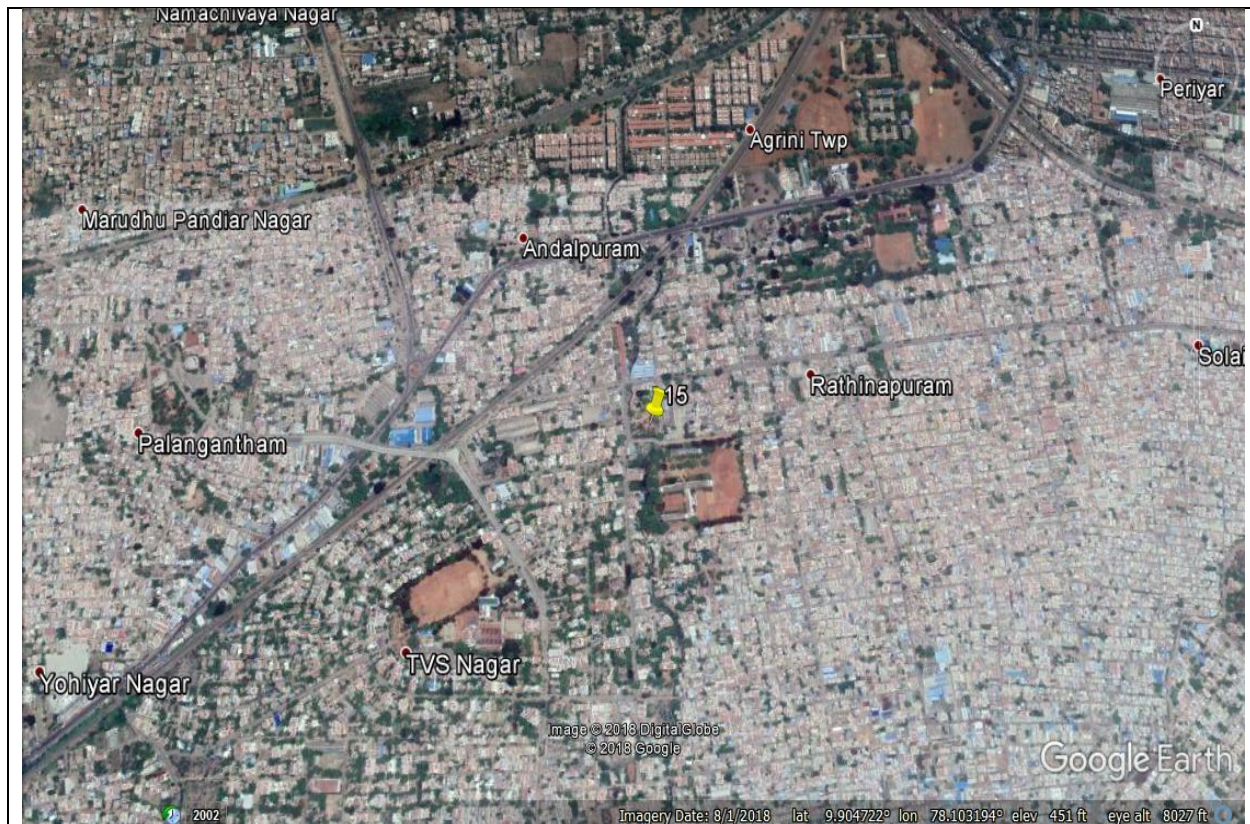


Location No: 10 (15) - TVS Park Sathya sai Nagar

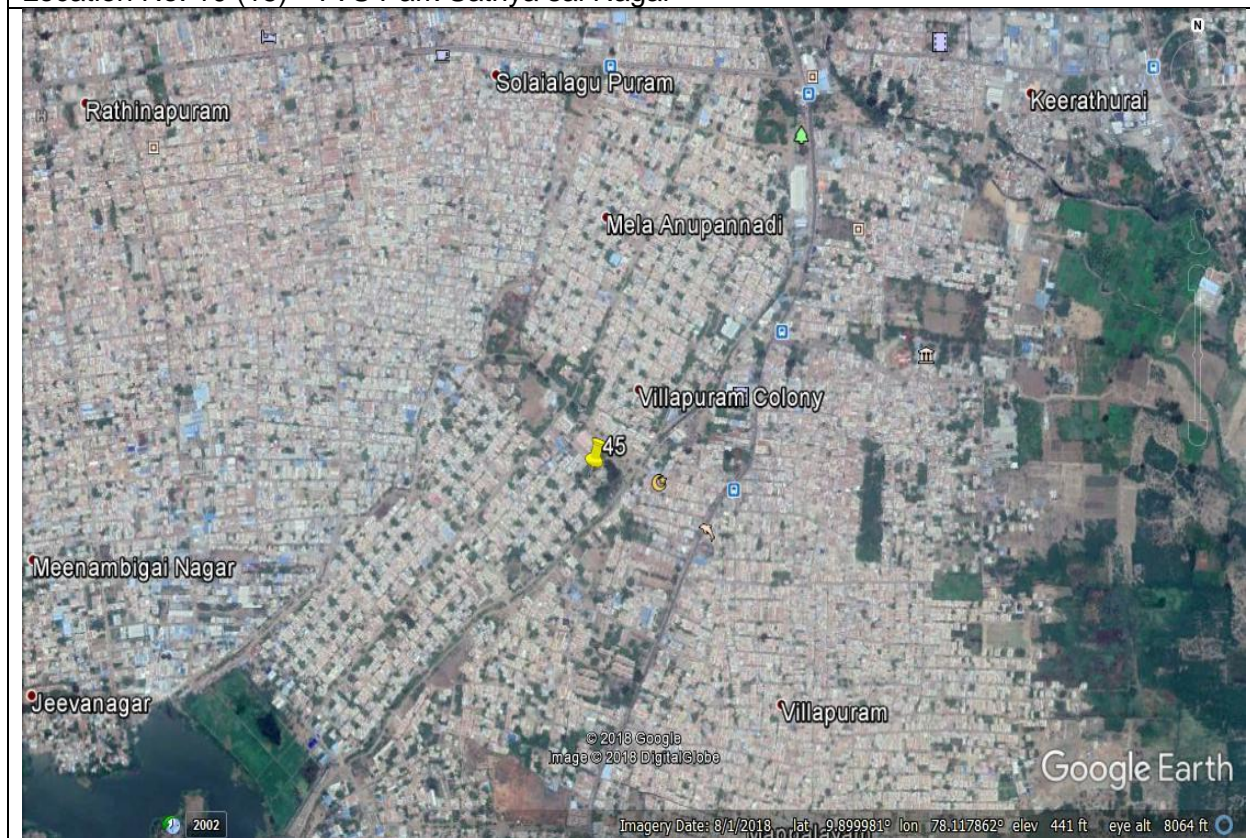


Location No: 11 (45) - Villapuram – SZ6 (Ward – 61)

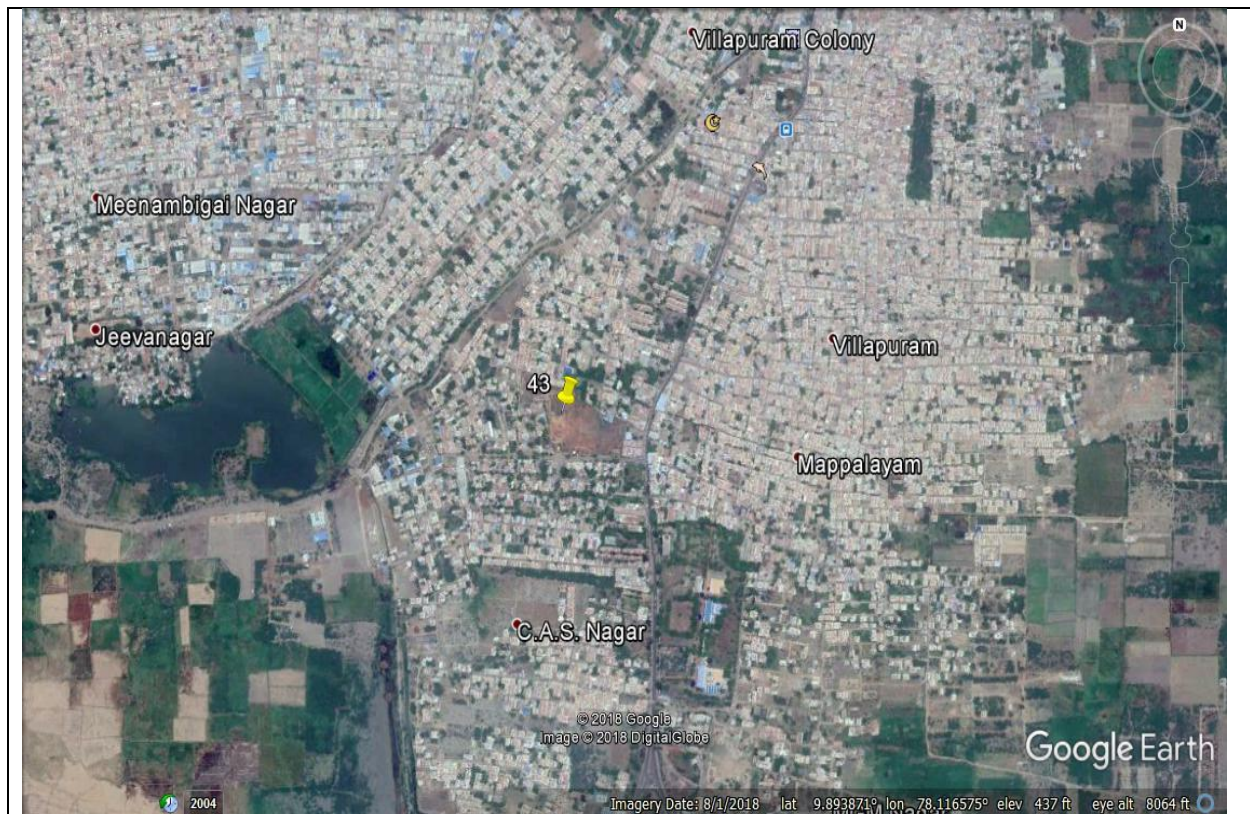

Location No: 12 (43) - MMC Colony –SZ 5

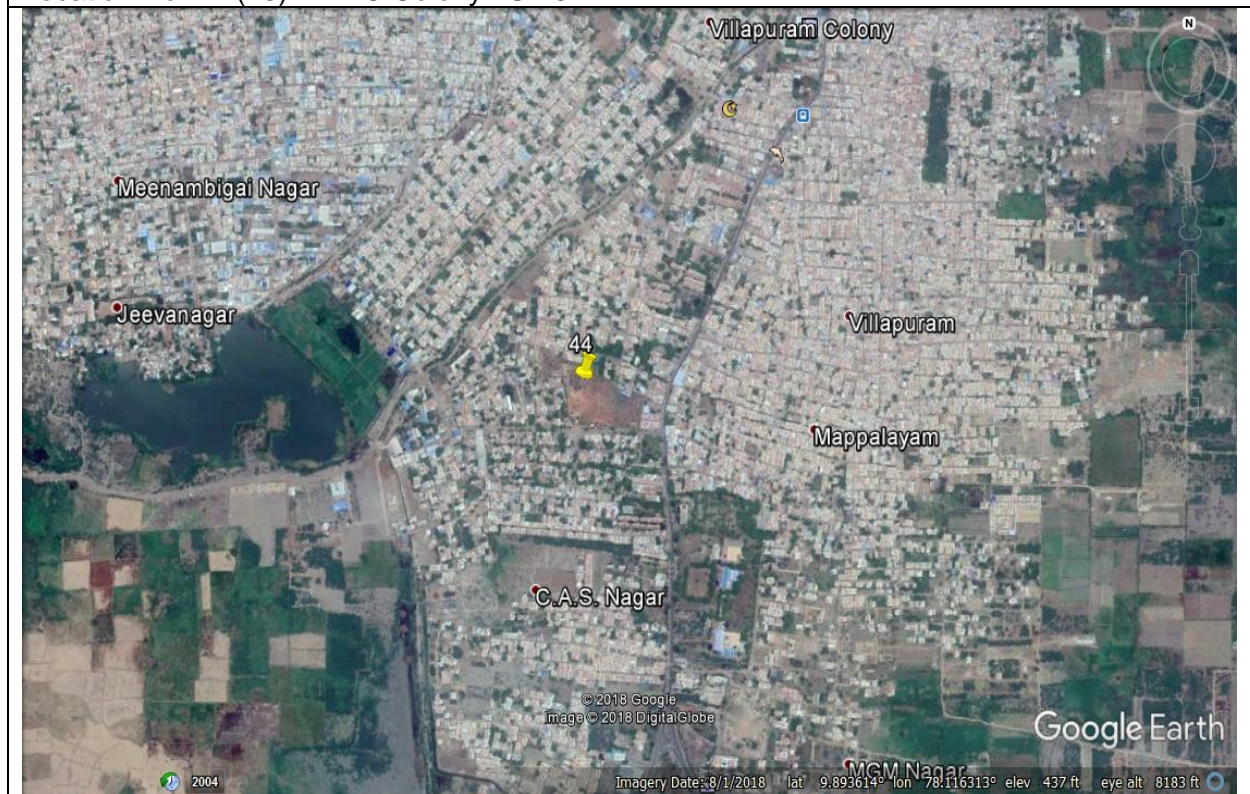


Location No: 13 (44) - MMC Colony –SZ4

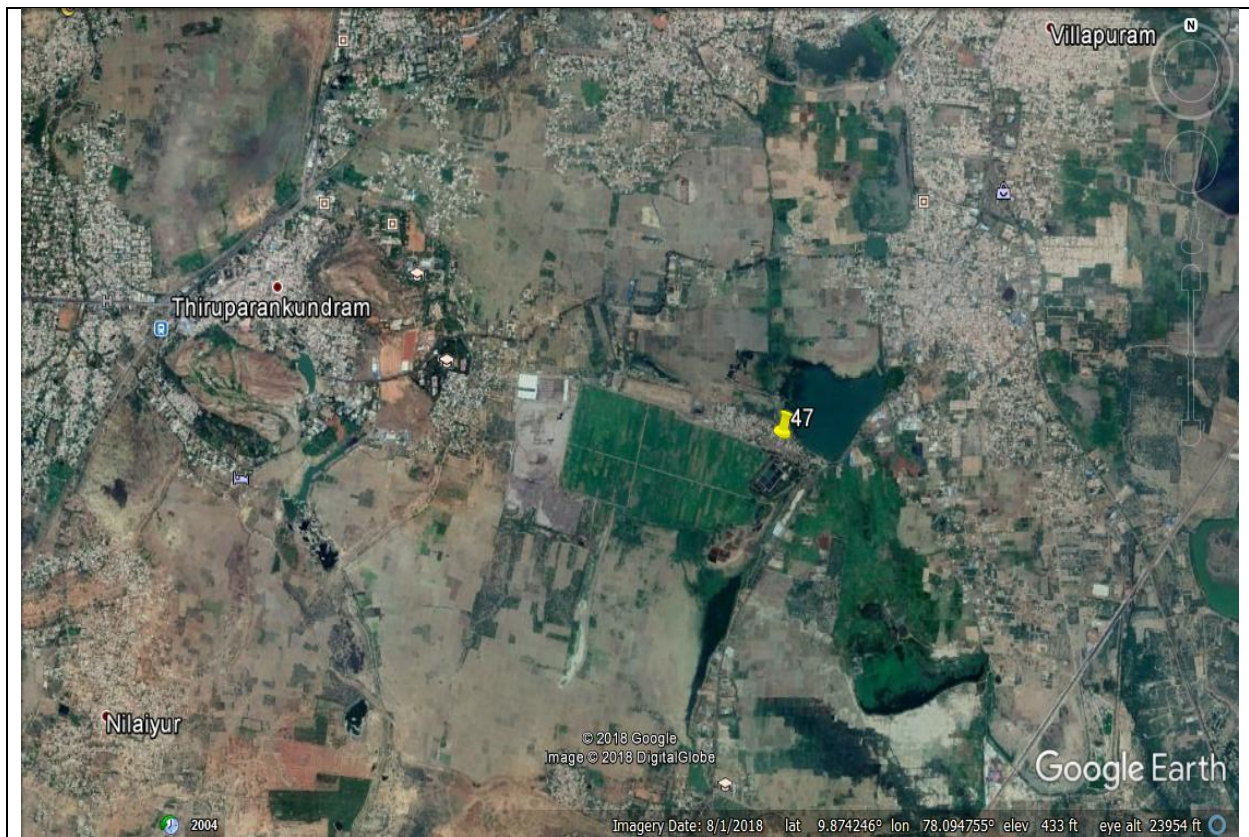


Location No: 14 (47) - Vellakkal




Location No: 15 (19) - Vaalaitoppu Corporation Ground

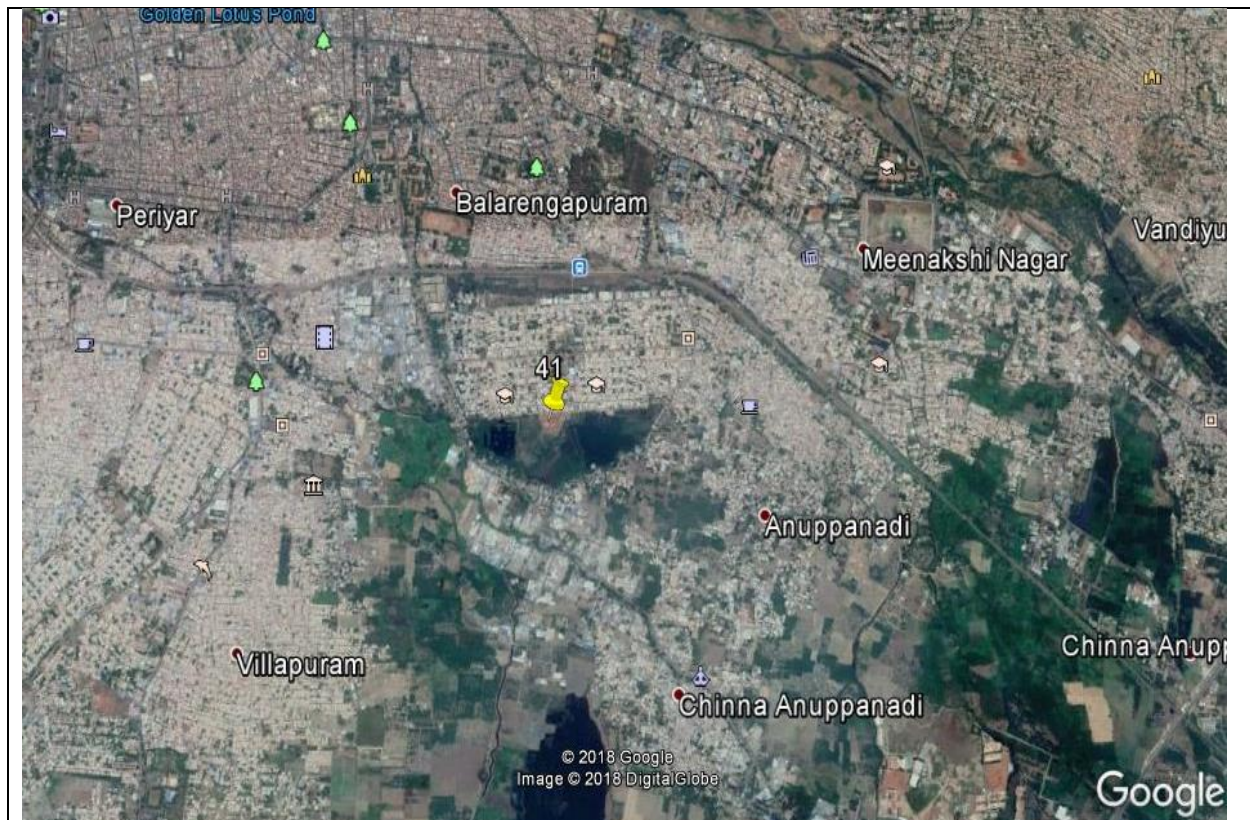


Location No: 16 (41) - Chinna Anuppanadi –SZ2

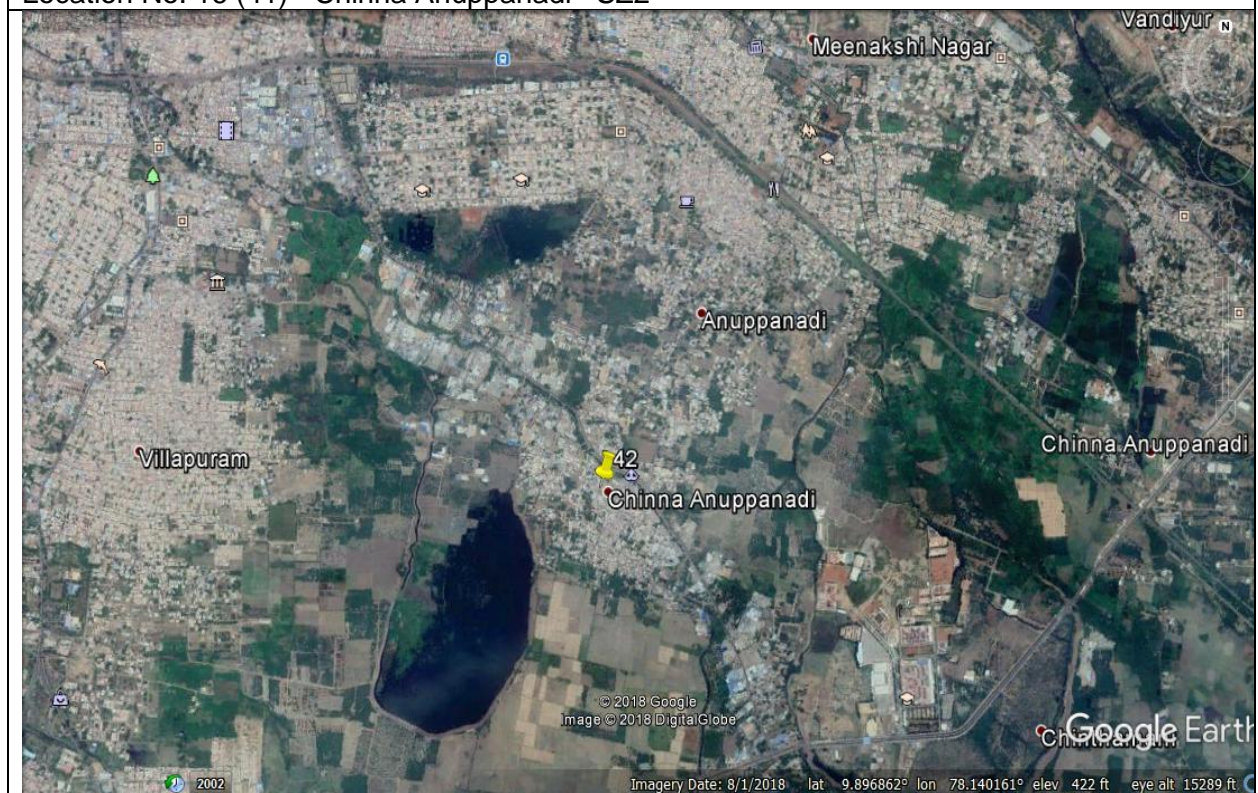

Location No: 17 (42) - Gurunathar Koil – SZ3 (Chinnthamani)

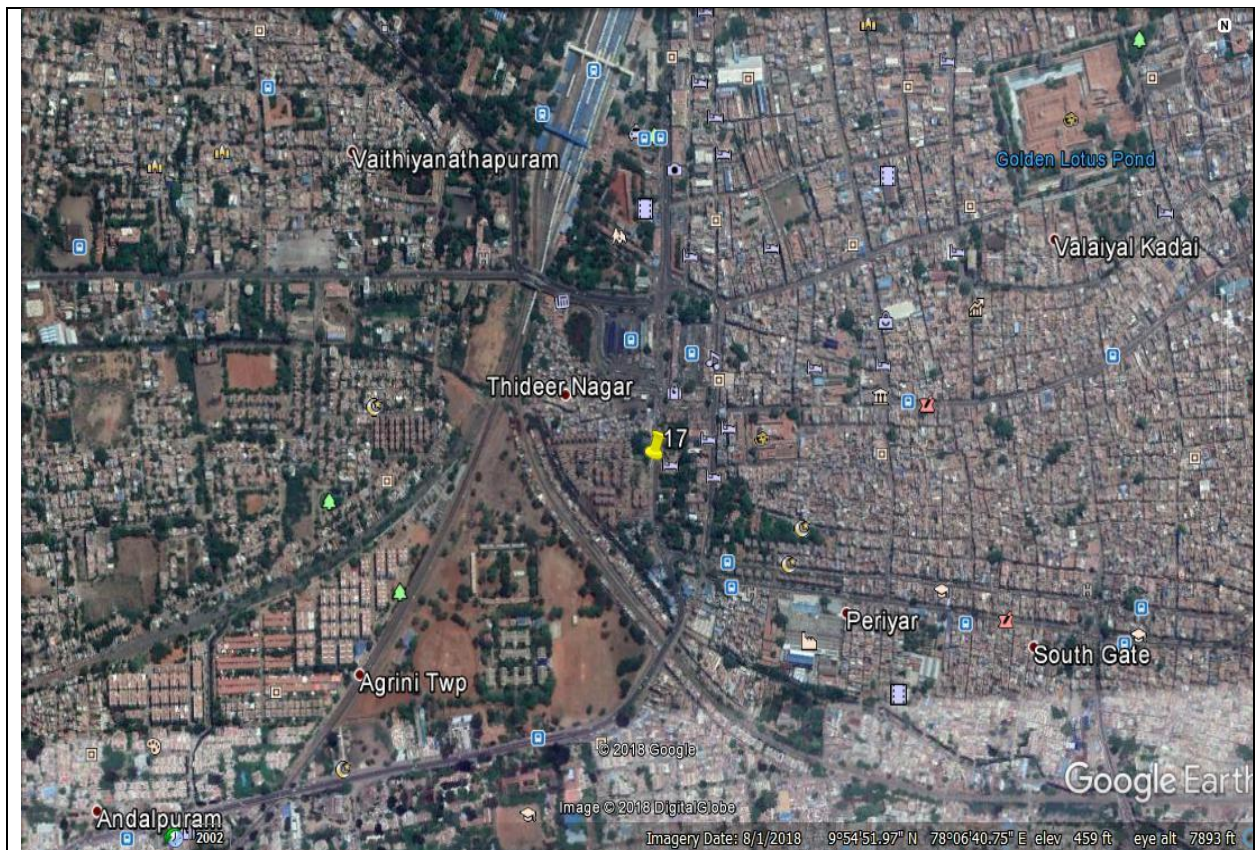

Location No: 18 (17) - Thideer Nagar

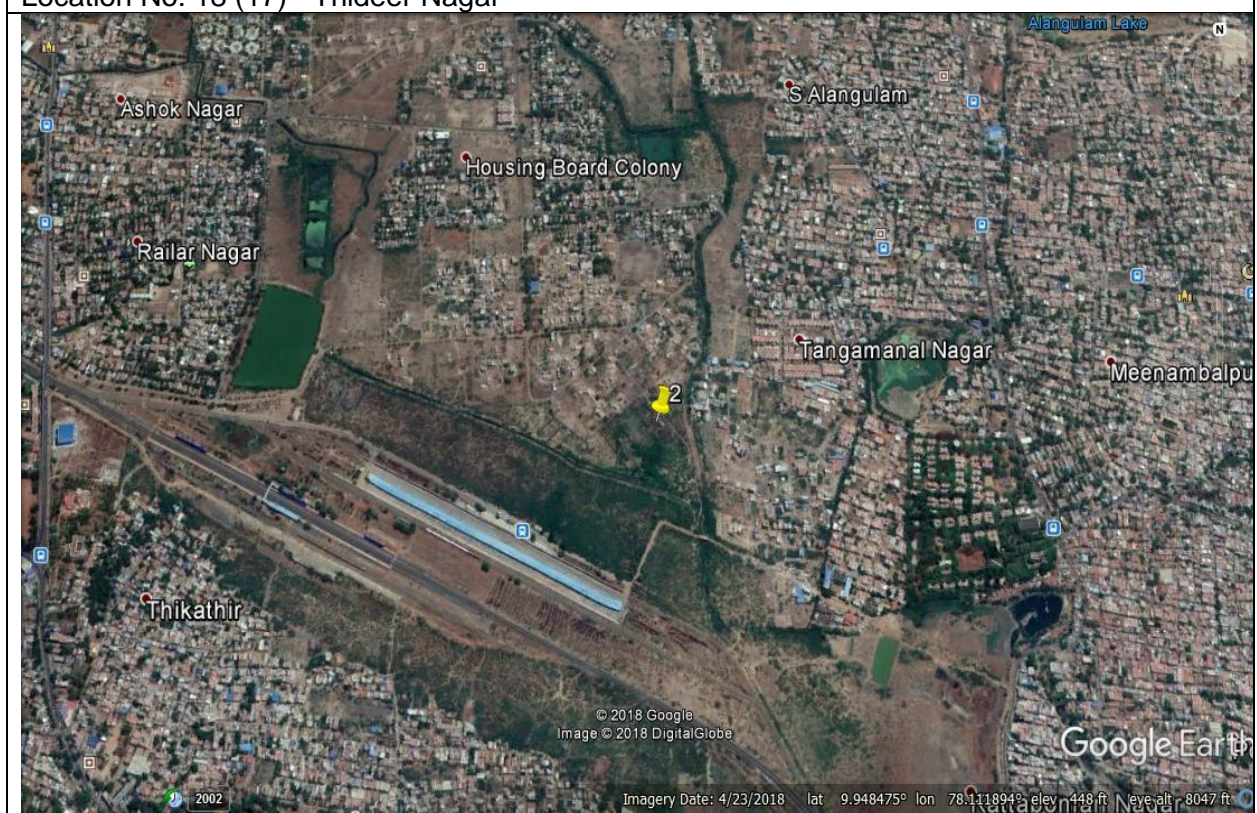


Location No: 19 (2) - Sellur Kanmai (Singarayar Colony)




Location No: 20 (4) – Sellur Kanmai (Sellur)




Location No: 21 (29) - Indranagar – NZ2

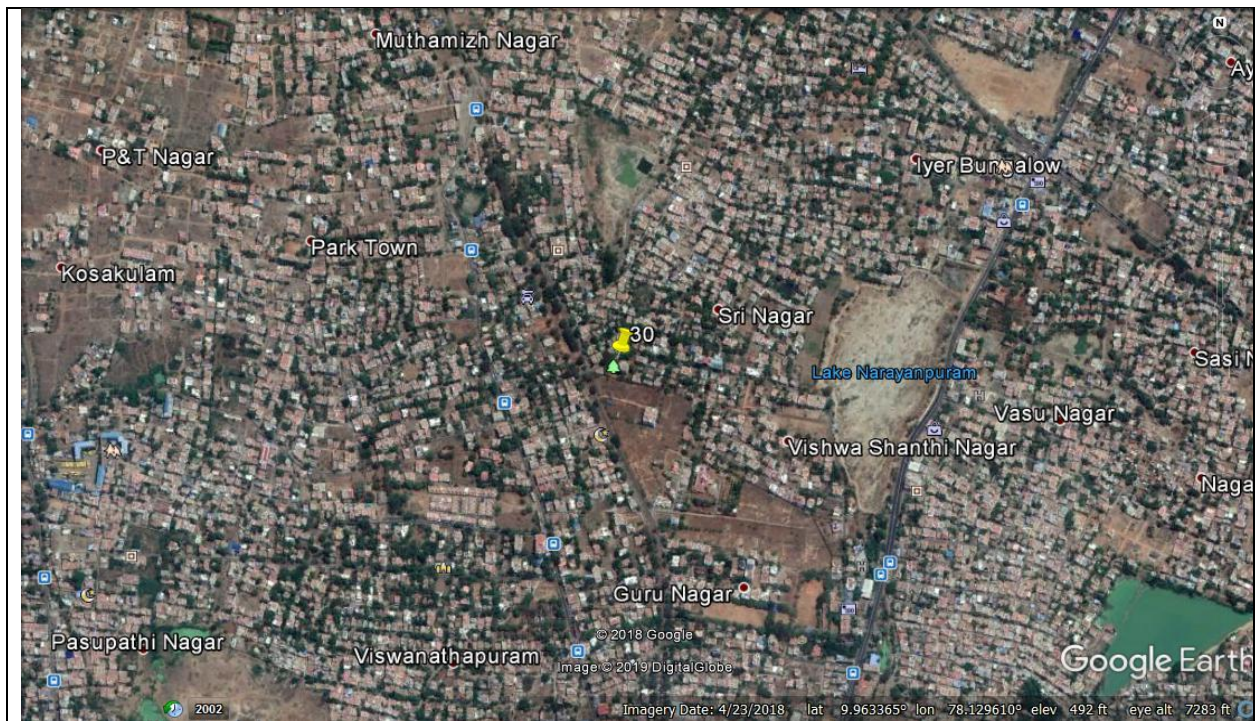


Location No: 22 (30) - Park town - Park Town – NZ5

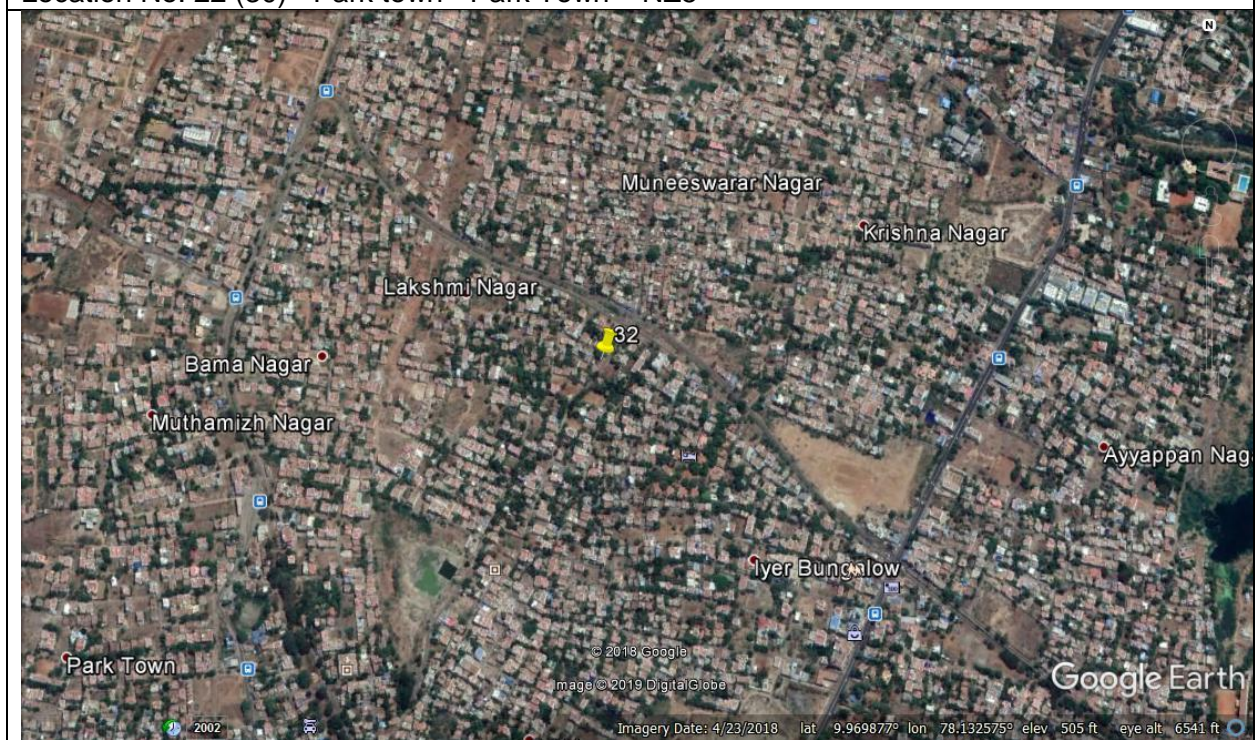


Location No: 23 (32) - EB colony

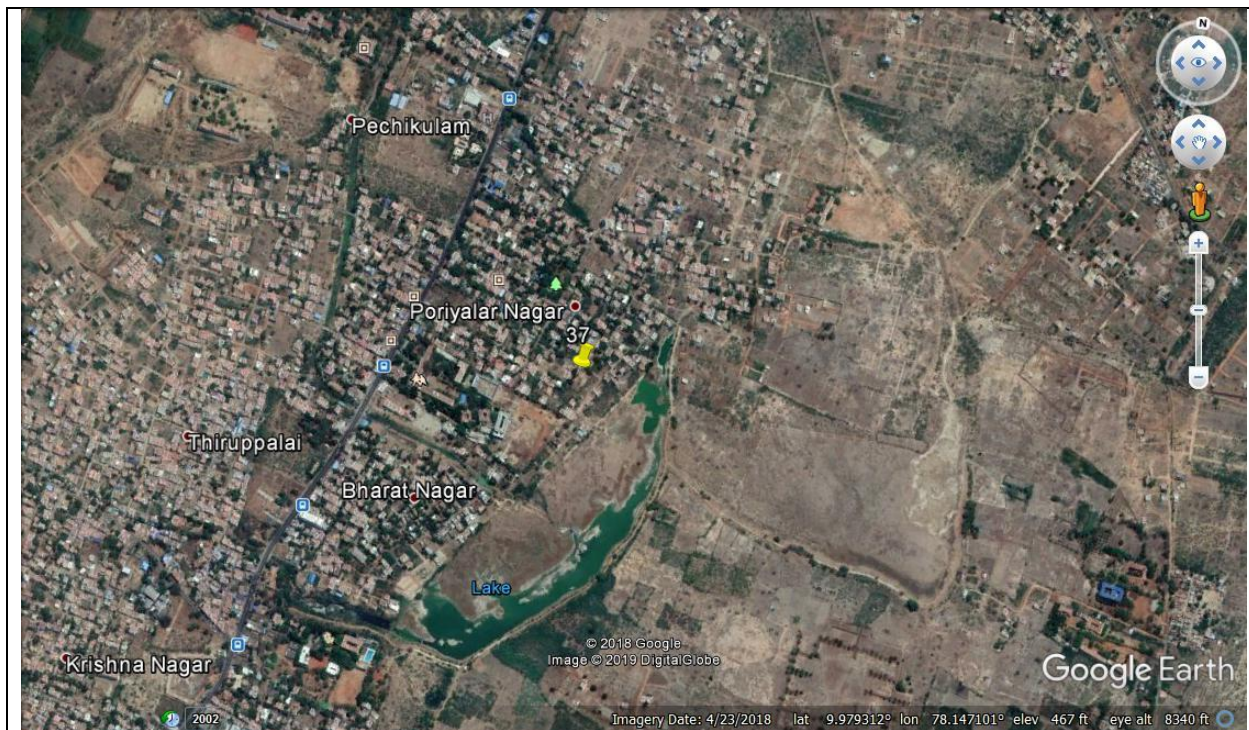


Location No: 24 (37) – Poriyalor Nagar

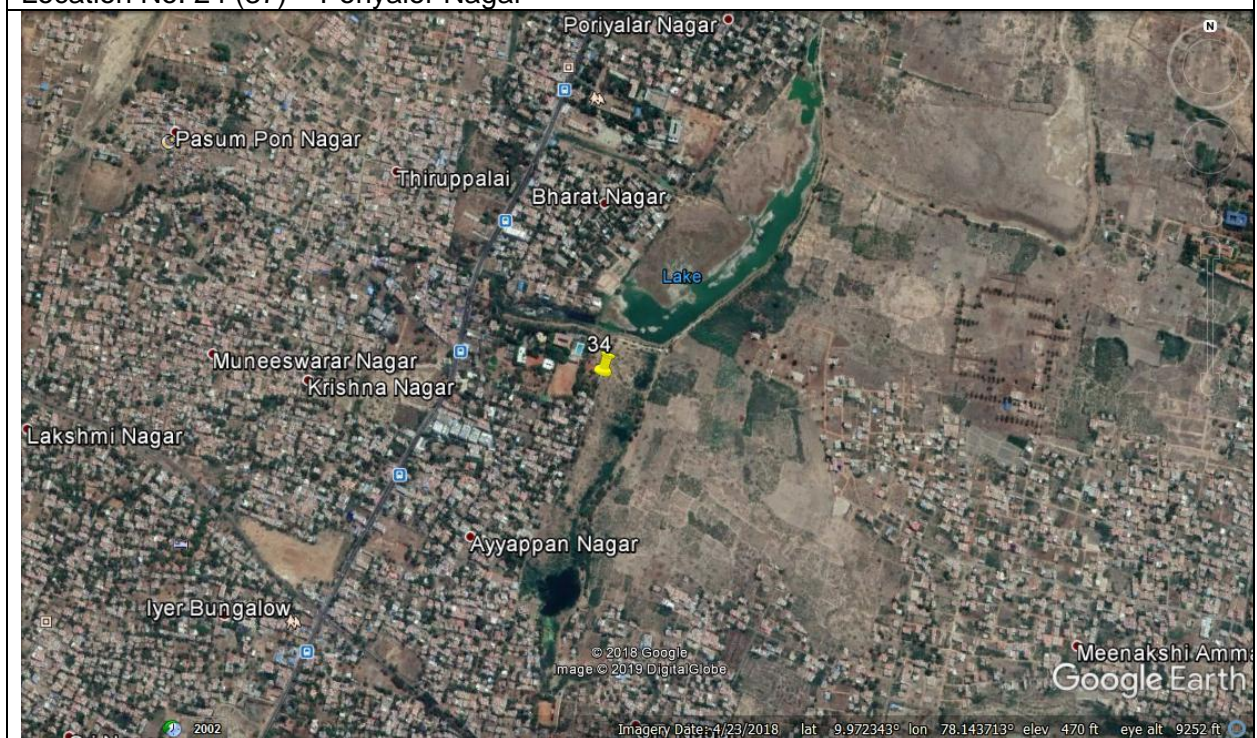


Location No: 25 (34) - Bharath Nagar

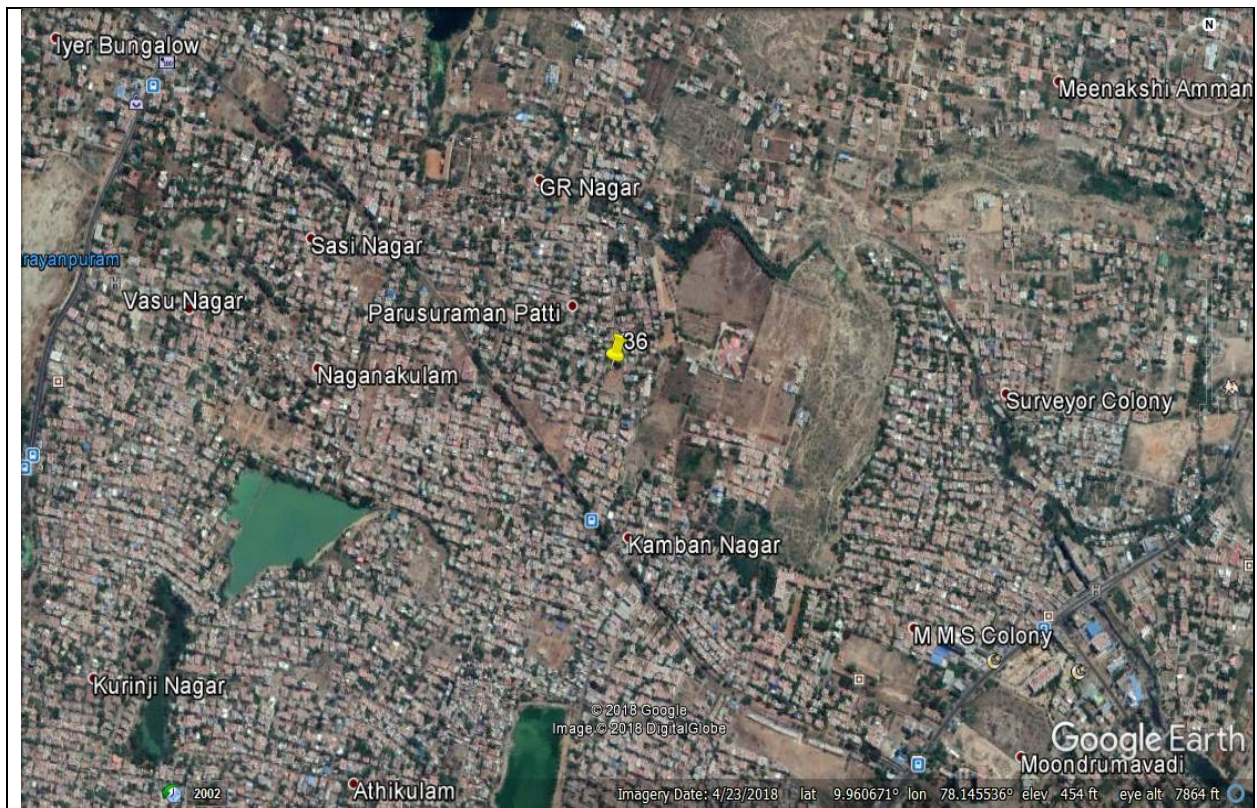


Location No: 26 (36) - GR Nagar – NZ9

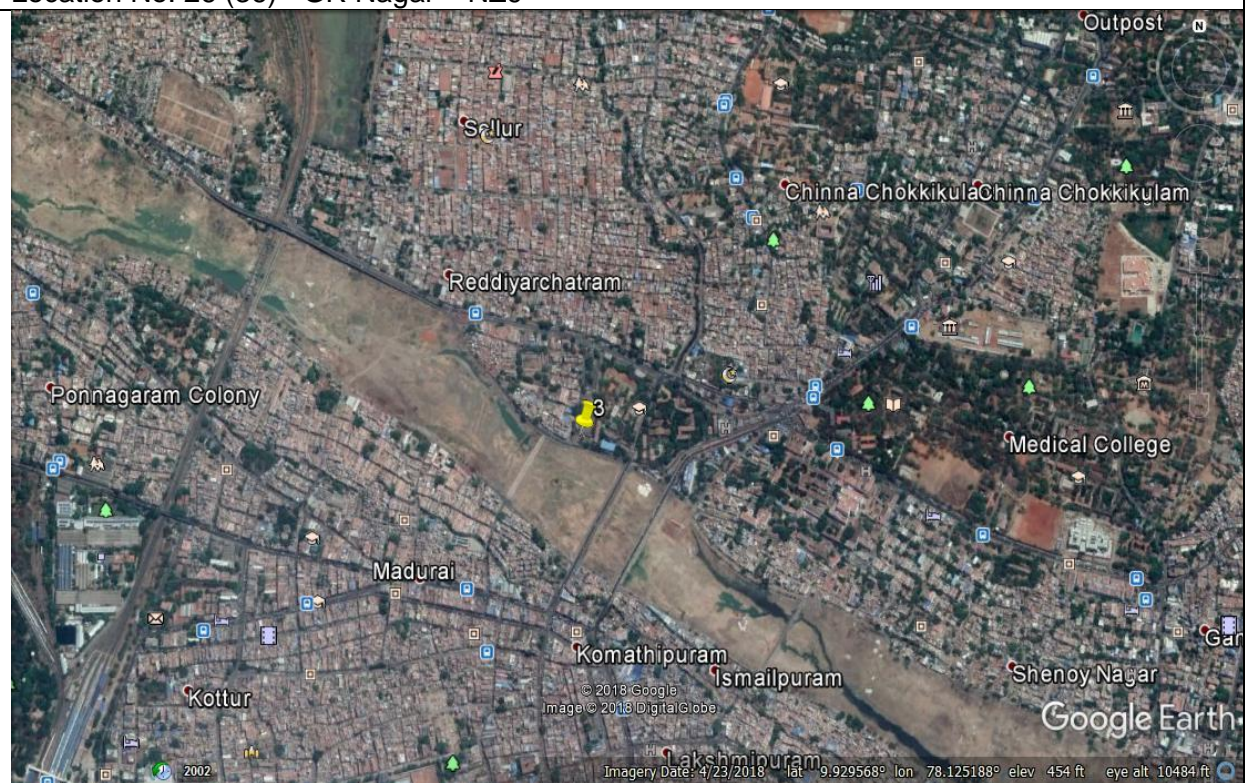

Location No: 27 (3) - Sellur Lorry Stand

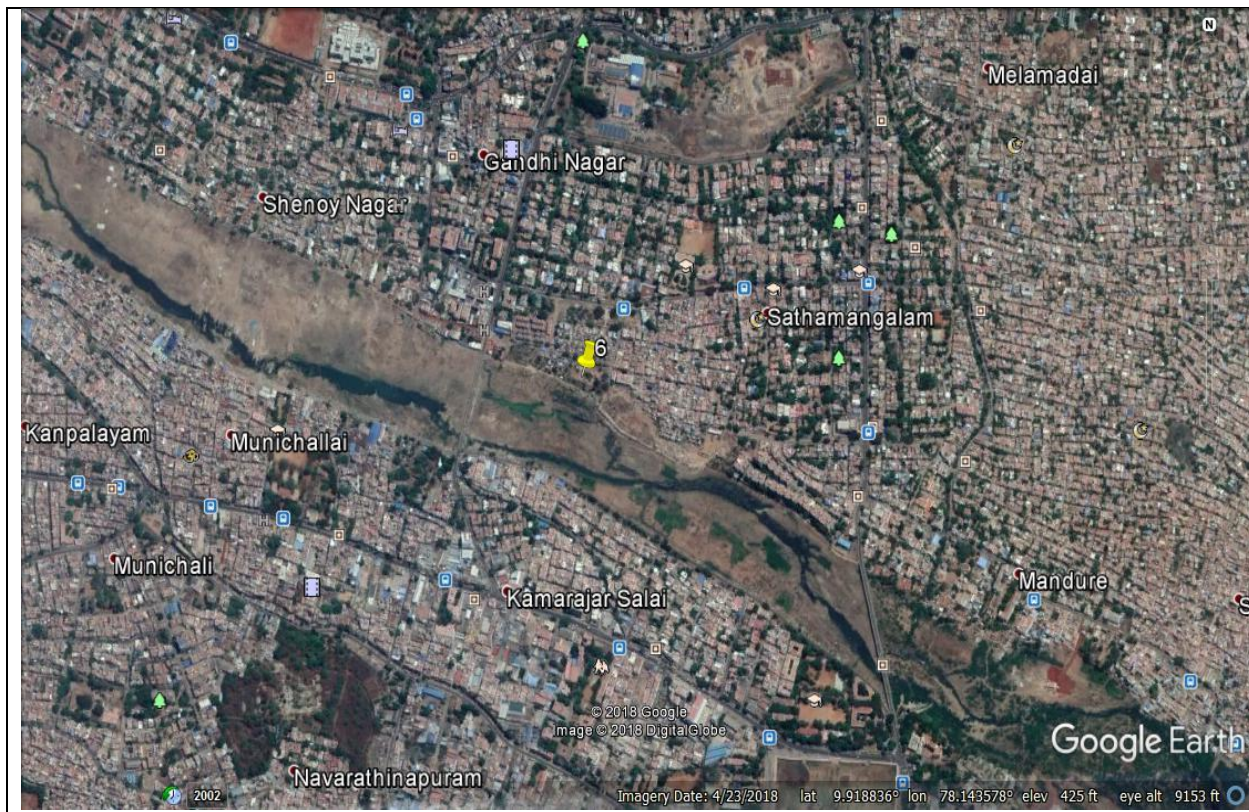


Location No: 28 (6) - SMP Colony near Mayor Bungalow

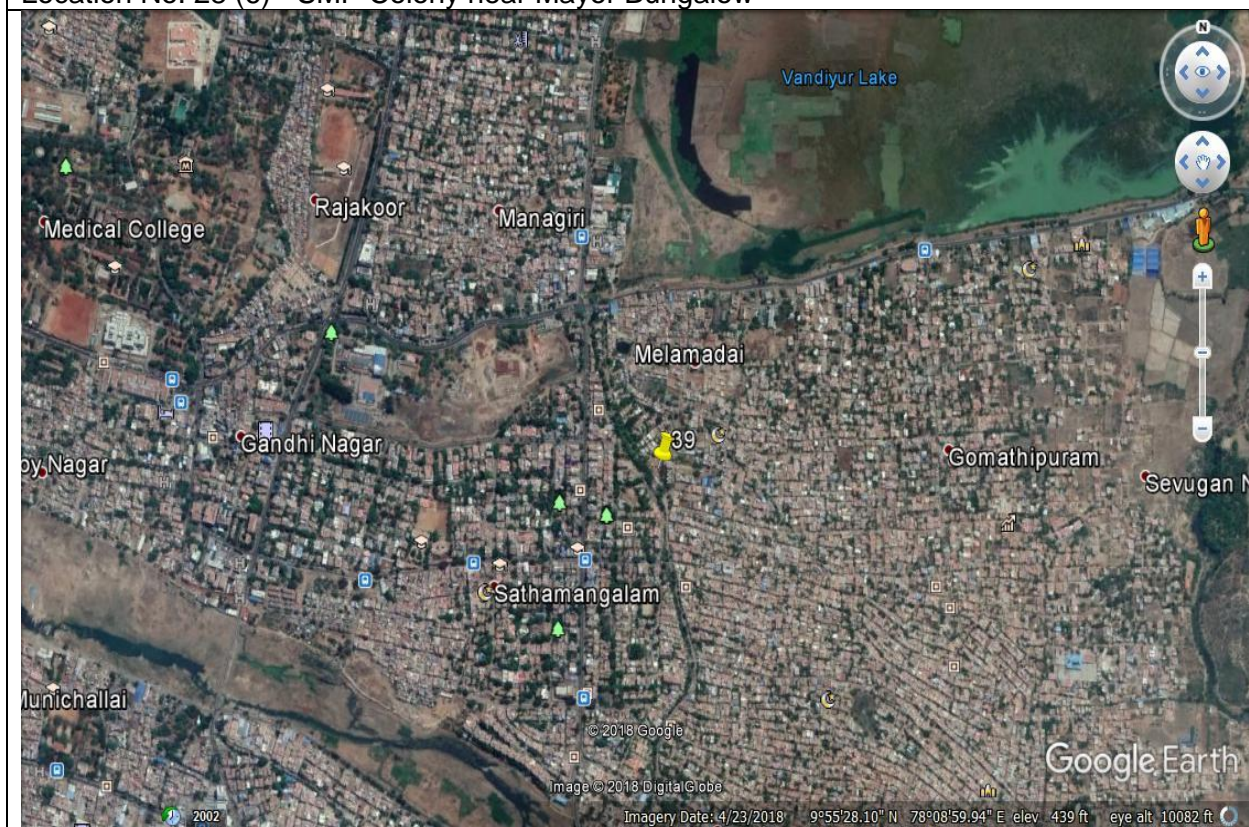


Location No:29 (39) - Shenpagathottam




Location No: 30 (7) - KK Nagar (Central Veg. Market)

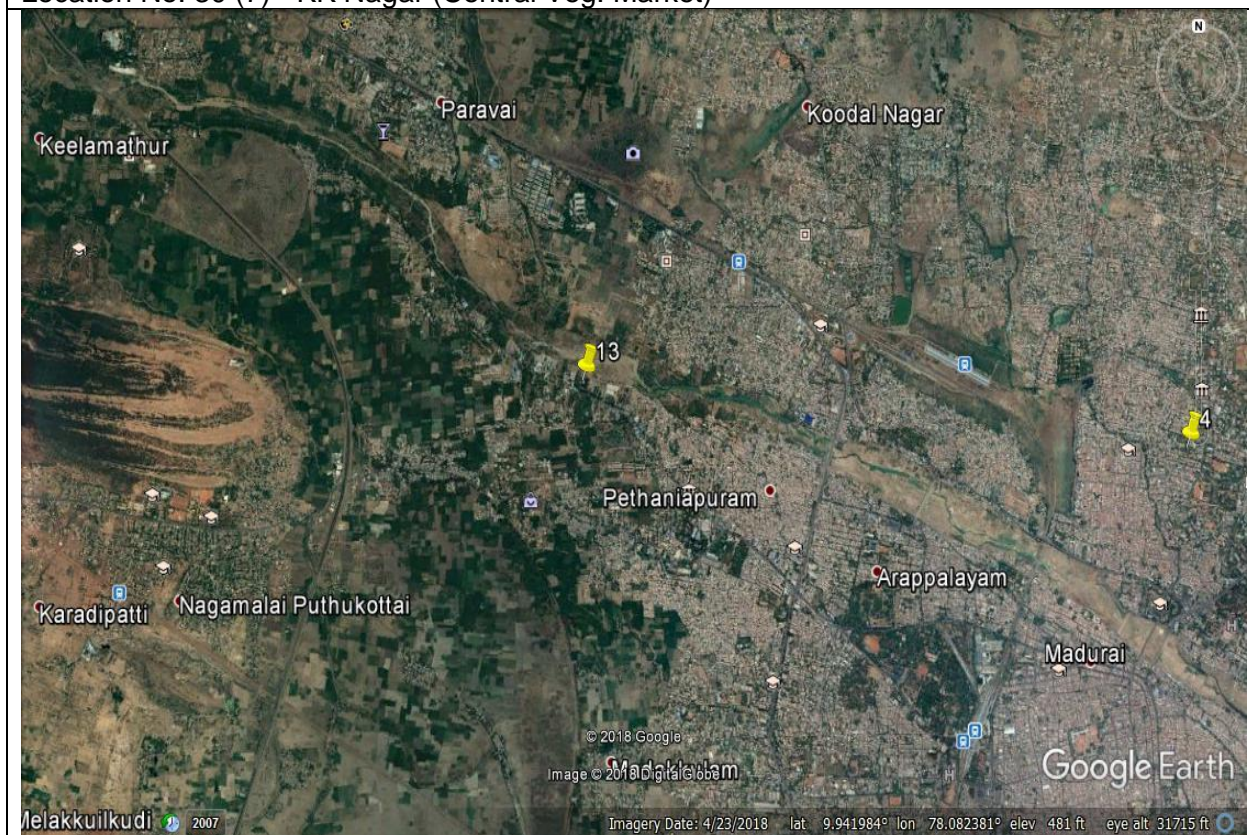


Location No: 31 (13) - Kochadai back side of Pumping station

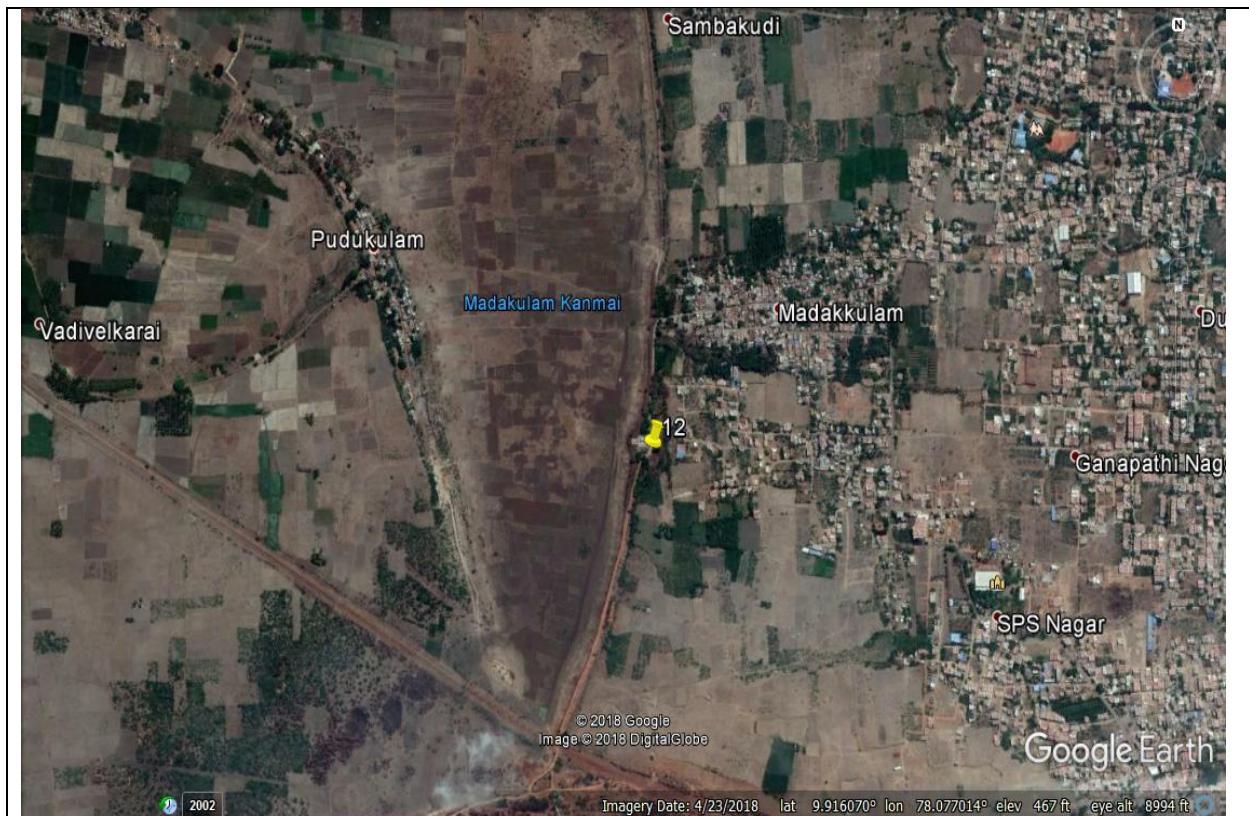


Location No: 32 (12) - VKP Nagar Madakulam

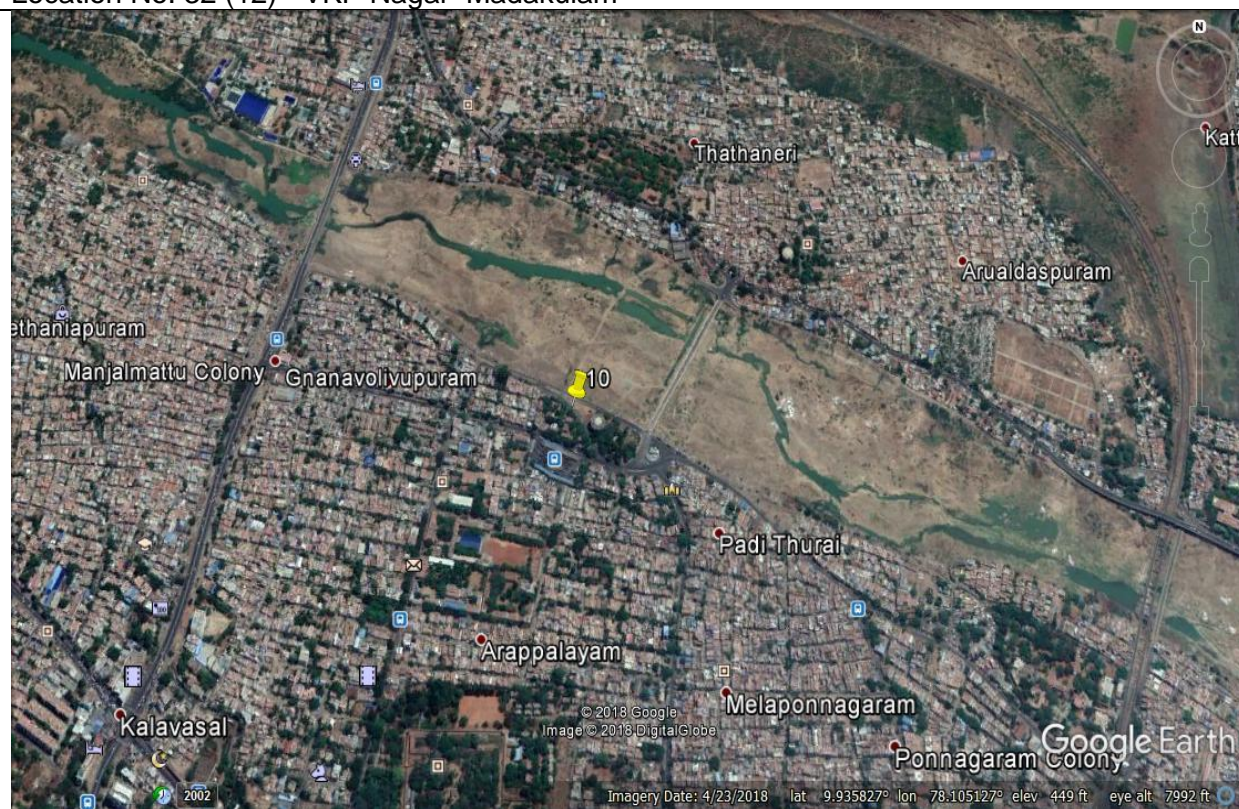


Location No: 33 (10) - Arappalayam Two wheeler Parking

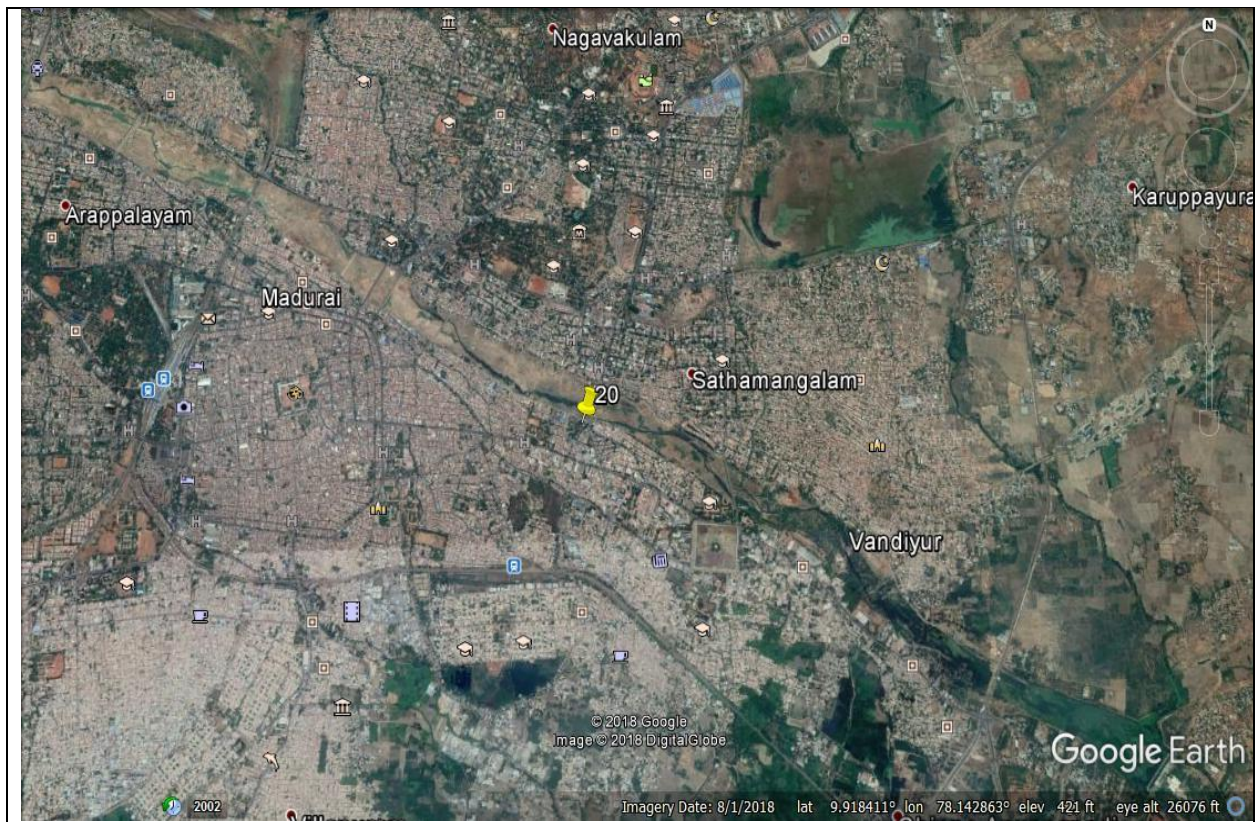


Location No: 34 (20) - AVSS Hospital behind MPS Santhaipeetai

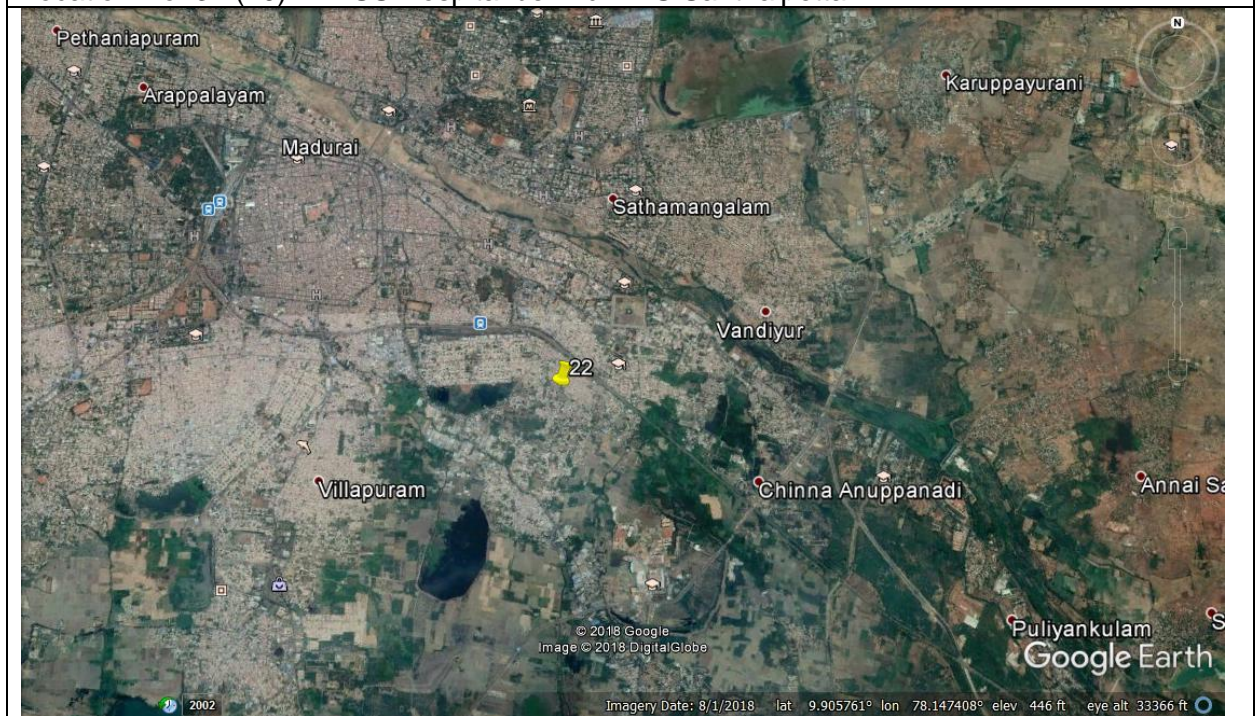

Location No: 35 (22) - Meenakshi Nagar (Slaughter House)

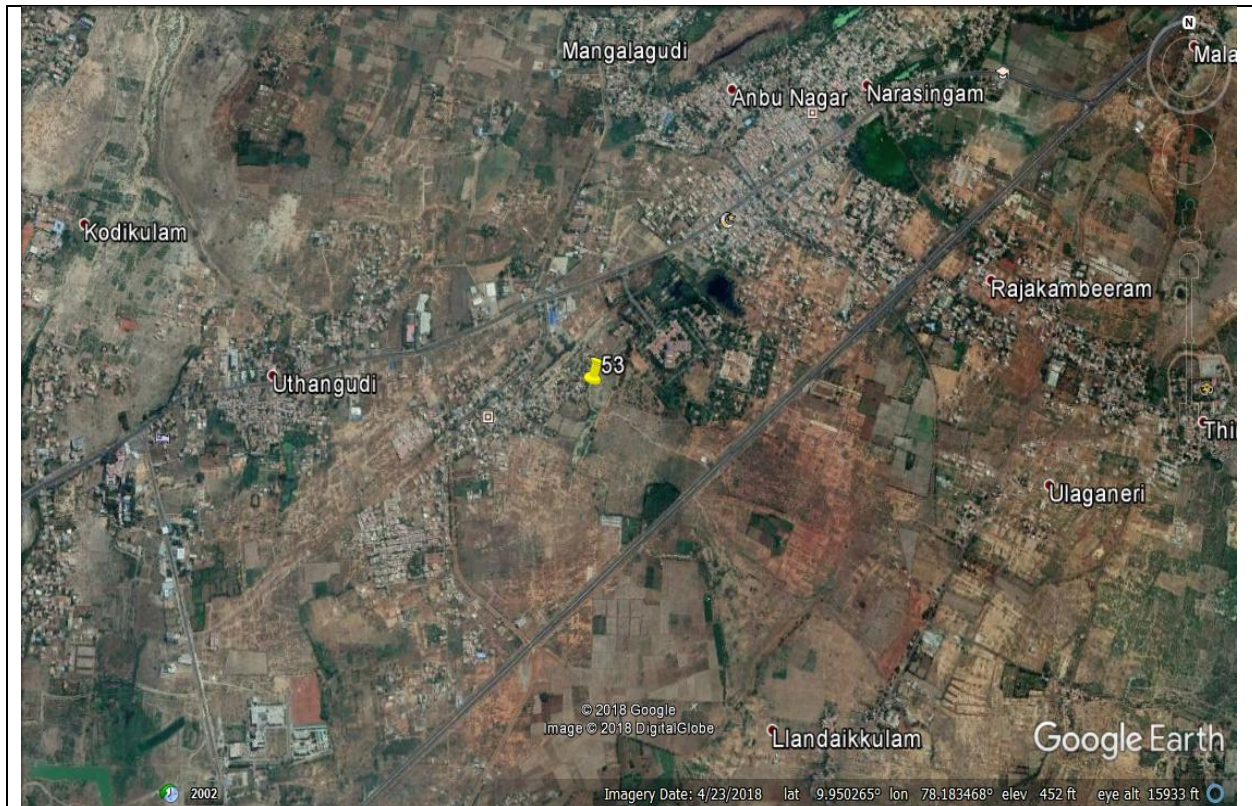

Location No: 36 (53) - Ulaganeri – NZ 11 (Ward – 28)

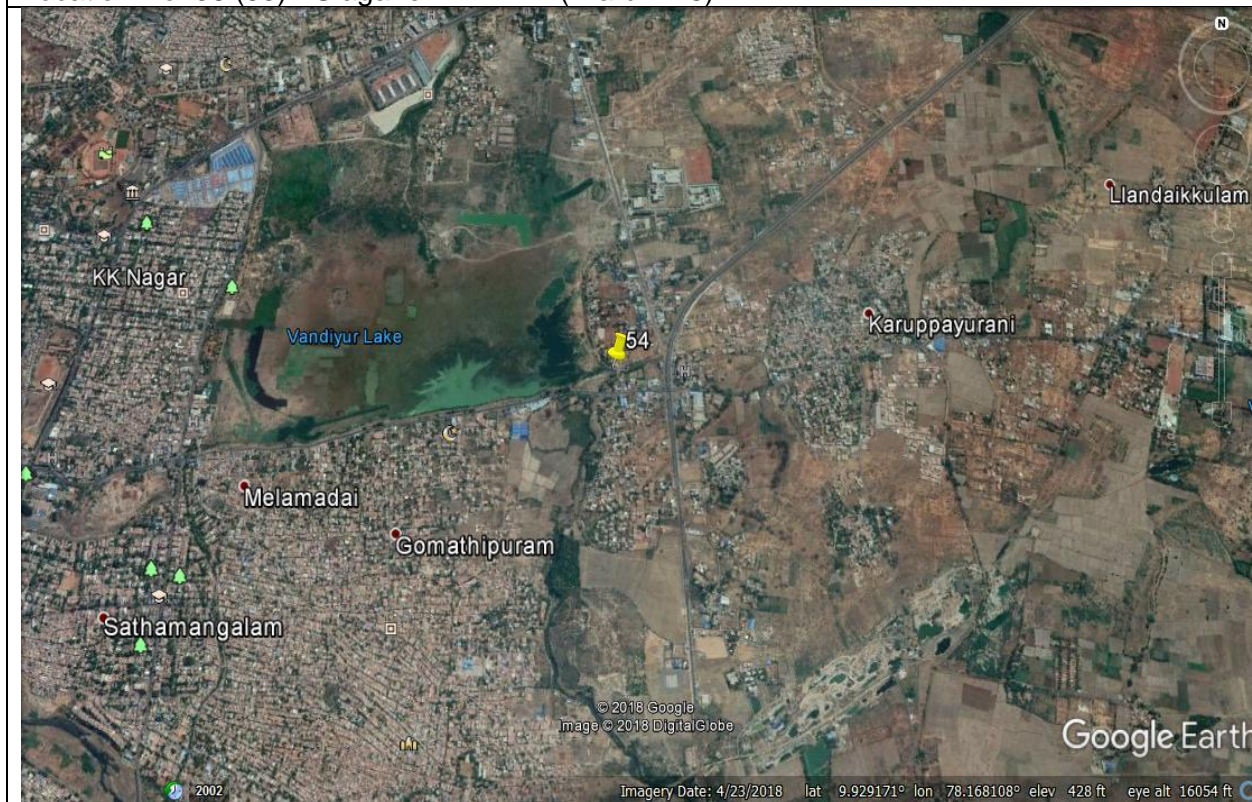



Location No: 37 (54) - Pandian Nagar – NZ12

Public Consultation at Overhead tank locations



A total of 37 OHT locations has been identified for water distribution under the “**Dedicated Water Supply Scheme for Madurai Municipal Corporation from Mullai Periyar at Lower camp**”. Out of 37 OHT’s, 14 OHT locations were identified for conducting public consultations, which was held from 13 February 2019 to 15 February 2019. The locations were selected based on the presence of socially important locations including the public park area, playground, burial ground, temples etc., consultation were held. The outcome of the consultation has been discussed in the following tables.



I. Minutes of meeting for “Dedicated Water Supply Scheme for Madurai Municipal Corporation from Mullai Periyar at Lower Camp” held on 13 February 2019


S. No	Participants	Outcome of the Consultation and Discussions	Response from PIU	Photographs
1.	OHT # 14 and 15 OHT Location: TVS Park Sathyasai Nagar M. Maheshwari, K. Marreswari, M. Barani, M. Sweety, R. Ghanam, K. Selvarajan, L. Alagiriraj, P.S. Pandiyan, S.G. Palsamy, K. Alagarsamy, T.K.S. Omana, N.V. Dhayarathi – HM (TVS - HSS) P. Jeyanthi – HM (TVS - HSS)	<p>In general, the proposal has been welcomed by the local people and they have shown unanimous support for the project</p> <ul style="list-style-type: none"> There is no objection for the construction of the OHT in the Public Park. What would be the project completion date? 	<p>It was informed by the PIU, that the work shall be completed within two years from the date of contract</p>	
2.	OHT# 47 OHT location: Vellakal Rasuthevar, Pandi, M. Karunanithi, P. Arunachalam, T. Raj kumar, P. Prabhu, S. Renugadevi, J. Pasumpon, R. Jeyanthimala, P. Malliga, A. Meenakshi, Murugayi, Chitra Ponnammal, Petchi, Pandiyyammal, Reyalakshmi, T. Shanmuganathan	<p>It was informed that the area is facing irregular water supply and hence it was requested to construct the OHT at the earliest so as to get regular water</p>	<p>It was assured by the PIU to construct the OHT at the earliest so as to facilitate the regular water supply</p>	

S. No	Participants	Outcome of the Consultation and Discussions	Response from PIU	Photographs
3.	OHT# 48 OHT location: Harvipatti S. Mariappan, G. Elankumaran, M. Ayyavu, K. Murugan, S. Ramalakshmi, K. Muthu, K. Amutha, P. Ellappan, Ganguly, G. Ramakrishnan, A. Jayabalan, M. Sangaiya, L. Raja murugan, P. Saravanapandi, S. Babu, G. Magudapathy, S. Pathiban (VIII A), G. Chandran (VIII A), R. Ramar, R. Lakshmanan, S. Dharun, K. Manikandan, S. Sanjay Kumar, S. Vetrivelan, R. Harivignesh, R.P. Jeeva Ragavan	<p>It was informed that due to irregular water supply, there is scarcity of water for drinking purposes and hence the local people have requested to construct the OHT at the earliest. However, it was suggested to shift the location of the OHT near to an existing one, so as to provide space for the children to use it as a play area.</p> <p>It was requested to have proper barricading/ fence to prevent children's entering the OHT area.</p> <p>It was suggested not to have borewell in the area</p>	<p>The PIU have accepted the request and assured that the new OHT shall be constructed near the existing one and it will be properly barricaded to prevent the children's entering the site.</p> <p>It was assured that there borewell will not be constructed in the OHT area</p>	
4.	OHT# 50 OHT location: Balaji Nagar A.A. Sethuram, P. Rajendran, V. Ganapathi, N. Shanmugasundaram , K. Palanikumar, A.J. Abdul nazeer, R. Amuthavalli, T. Murugan, V. Ganesh, G. Janarthanan	<p>Similar to Harvipatti area, due to irregular water supply, the regular activities is getting hampered. Hence, the local people have requested the PIU to construct the OHT at the earliest to solve the water related issues and also they have requested the PIU to shift the OHT inside the public park</p>	<p>The PIU have accepted the request and assured that the OHT shall be located inside the Public park</p>	


Minutes of meeting for “Dedicated Water Supply Scheme for Madurai Municipal Corporation from Mullai Periyar at Lower Camp” held on 14 February 2019

S. No	Participants	Outcome of the Consultation and Discussions	Response from PIU	Photographs
1.	OHT# 19 OHT location: Vaalaithoppu Corporation Ground G. Kumar, Arumugam, V. Jayarani, Pandiamma, A. Kalieeswari, M. Pooppandi, R. Senthoorpand, A. Kalleswari, N. Katturaja and S. Murugan	The local community have requested the PIU to construct the OHT and to provide water supply at the earliest		
2.	OHT# 21 OHT location: Meenakshi Nagar L. Nagaraj, S. Vargeeshbabu, S. Kannan, Shanthi, Mary, M. Savarimuthu, Lakshmanan, A. Andisami and Kuruvammal	The local community have requested the PIU to construct the OHT and to provide water supply at the earliest For the PAP's who are losing the structures are requested for appropriate compensation.	It was assured by the PIU that the PAP's shall be compensated as per the provisions given in the RP	


S. N o	Participants	Outcome of the Consultation and Discussions	Response from PIU	Photographs
3.	<p>OHT# 36 OHT location: Island Nagar</p> <p>M. Ramu, C. Vetrivel, M. Navaneeth, M. Ramkumar, P.A. Muthupandi, S. Balamurugan, C. Dhayalammal, D. Jenifer, R. Rathinam, S. Yasmai and Thangam</p>	<p>One of the PAP have stated that he is a fisherman depending on the nearby water tank for fishing. However, due to the scarcity of water in the tank, he opted for an alternate job (mosaic polishing). Due to his absence, his house was demolished without prior information/ notice.</p> <p>Few of the local community members have requested for an approach leading to the nearby temple.</p>	<p>PIU have informed that notice has been issued well in advance for vacating the place. For the loss of the structure, compensation has been provisioned in the RP, PIU have assured that the PAP shall be compensated as per the provisions of RP.</p> <p>The PIU have assured that 2 m width approach road to the temple shall be provided for the benefit of the local people.</p>	
4.	<p>OHT# 38 OHT location: Shenpagathottam</p> <p>A. Varusaimohamed, A. Ninalan and J. Gabriel</p>	<p>The local community have requested the PIU to construct the OHT and to provide water supply at the earliest</p>		

S. No	Participants	Outcome of the Consultation and Discussions	Response from PIU	Photographs
5.	OHT# 41 OHT location: ChinnaAnuppanadi K. Abimani, Vinoth, S. Santhosh, Kumar, N. Amir abbas, R. Vasanth, K. Kandavelpandian, D. Karthikeyan, M. Sathasivam, K. J. Lalitha, T.G. Savithiri, Chellammal, N. Uma, E. Kiruba, M. Kannan, S. SanthanaShanthi, I. Sahayarajan and S. Suresh	<p>The local community have no objection to the construction of the OHT. However, they have requested the PIU to construct the OHT in such a way not to disturb the children's playing activity.</p> <p>Few have also commented that they don't want to have borewell in that location</p>	<p>It was assured by the PIU that the playing activity will not be disturbed during the construction activities.</p> <p>The PIU have clarified that there is no provision to have borewell in this project. The water shall be sourced from Mullaiperiyar dam (not groundwater)</p>	

Minutes of meeting for “Dedicated Water Supply Scheme for Madurai Municipal Corporation from MullaiPeriyar at Lower Camp” held on 15 February 2019





S. No	Participants	Outcome of the Consultation and Discussions	Response from PIU	Photographs
1.	OHT# 42 OHT location: GurunatharKoil – Chinnthamani S. Chitra, S. Vijayalakshmi, T. Mary Joyce, P. PandiSelvan, V. SethuMadhavan, S. Ganeshan and V. Ram	<p>The local community have supported the project and requested the PIU to provide compound wall surrounding the OHT for safety purposes.</p>	<p>PIU have assured to provide compound wall / fencing surrounding the OHT.</p>	

S. No	Participants	Outcome of the Consultation and Discussions	Response from PIU	Photographs
2.	OHT# 25 OHT location: Semparuthi Nagar C. Prasath, P. Jeyaprakash, P. Nagajothi, S. Shanthi, K. Maheswari, A. Gayathiri, A. Sakthivel, Sam George, M. Hemalatha, R. priya, R. Raja, M. Gurusamy, R. Lakshmi and K. Muthulakshmi	The local community have supported the project and requested the PIU to construct the OHT.		
3.	OHT# 32 OHT location: EB Colony P. Manimaran, P. Premalatha, S. Steeladevi, Arammal, S. Senthilvel, V. Pirathaban, Karuppasamy, P. Arivalagan, T. Jeyakodi and P. Madasamy	The local community have supported the project and have requested the PIU to construct the OHT.		
4.	OHT# 34 OHT location: Bharath Nagar P. Muthuraman, P. Moorthy, J. Hasanbanu and A. Chellama	The local community have supported the project and requested the PIU to construct the OHT.		

S. No	Participants	Outcome of the Consultation and Discussions	Response from PIU	Photographs
5.	OHT# 37 OHT location: Poriylar Nagar Naveen Yasav, M.A. Shanmugam, K. Karuppiyah and S. Vijayalakshmi	The local community have supported the project and requested the PIU to construct the OHT. However, the communities have raised a query regarding the technology used in the construction of the OHT. Because, due to the soil instability one of the house got damaged and it was recently renovated.	PIU have clarified the query with respect to the technology used for the construction of the OHT.	

Public Consultation at Distribution Network (Package 4)

Public consultations, which was held on 23.12.2020 & 24.12.2020. The locations were selected based on the presence of socially important locations consultation was held. The outcome of the consultation has been discussed in the following tables

S. No	Participants	Outcome of the Consultation and Discussions	Response from PIU	Photographs
1.	Anaiyur O. Nagajothi N. Hemalatha, U. Ram, S. Premalatha, R. Moorthy, L. Maheswari	The local community has supported the project.	Work will be completed within two years	
2.	Anuppanadi P. Stella, B. Prasath, S. Sethu, K. Hasan, R. Vijayalakshmi	The local community have supported the project and have requested to Complete soon	Work will be completed within two years	
3.	Thirunagar N. Karuppiah, B. Chellama, D. Karuppasamy, E. priya, W. Sethu, V. Mary, O. Raja G. Pandi	The local community have supported the project and have requested to Complete soon	Work will be completed within two years	
4.	Chinna Udaipu T. Vijayalakshmi, V. Ganeshan, E. Manimaran, L. Muthuraman, C. Shanmugam, A. Gayathiri	The local community have supported the project and have requested to Complete soon	Work will be completed within two years	

**DETAILED OPERATIONAL REPORT ON SAFETY
MEASURES & PRE-CAUTIONS FOLLOWED IN SITE
FOR COVID-19 (SOP)**

INDEX

Chapter No	Description
1	Introduction
2	COVID-19
3	COVID-19 Typical symptoms
4	Basic Precautions in Workers Protection
	4.1 Labour deployment best Practices
	4.2. Workers Protection &Precaution
	4.2.2Workers Protection
	4.2.3 Workers Precaution
	4.2.4 Medical attention One should seek medical attention without losing time
	4.3 General directions to be followed at Site
5	Work Site Preventions
	5.1 Site Access
	5.2 Construction areas
6	6.1 Material Management
	6.2 Transportation to and from Site
	6.3 Labour Quarters Protocol
	6.4 Medical Camps
7	Registers
8	Returns
9	Training &Awareness
10	Emergency Contacts
11	Scenerio Planning
12	Covid-19 Check Slip
13	Reference

1. INTRODUCTION

This report gives detail instructions & norms followed in site on day to day basis followed by the guidelines issued by the Govt. of India & Tamil Nadu to eradicate and to prevent spreading of COVID -19. It is revised during October, 2020 considering the inputs further available so that the User will be best benefited.

2. COVID – 19

COVID-19 is the infectious disease caused by the most recently discovered corona virus. This new virus and disease were unknown before the outbreak began in Wuhan, China, in December 2019. COVID-19 is now a pandemic affecting many countries globally

Most people (about 80%) recover from the disease without needing hospital treatment. Around 1 out of every 5 people who gets COVID-19 becomes seriously ill and develops difficulty breathing. Older people, and those with underlying medical problems like high blood pressure, heart and lung problems, diabetes, or cancer, are at higher risk of developing serious illness. However, anyone can catch COVID-19 and become seriously ill. People of all ages who experience fever and cough associated with difficulty breathing/shortness of breath, chest pain/pressure, or loss of speech or movement should seek medical attention immediately. If possible, it is recommended to call the health care provider or facility first, so the patient can be directed to the right clinic.

People can catch COVID-19 from others who have the virus. The disease spreads primarily from person to person through small droplets from the nose or mouth, which are expelled when a person with COVID-19 coughs, sneezes, or speaks. These droplets are relatively heavy, do not travel far and quickly sink to the ground. People can catch COVID-19 if they breathe in these droplets from a person infected with the virus. This is why it is important to stay at least 1 meter) away from others. These droplets can land on objects and surfaces around the person such as tables, doorknobs, and handrails. People can become infected by touching these objects or surfaces, then touching their eyes, nose, or mouth. Therefore it is important to wash your hands regularly with soap and water or clean with alcohol-based hand rub.

3. COVID – 19 TYPICAL SYMPTOMS

The most common symptoms of COVID-19 are fever, dry cough, and tiredness. Other symptoms that are less common and may affect some patients include aches and pains, nasal congestion, headache, conjunctivitis, sore throat, diarrhea, loss of taste or smell or a rash on skin or discoloration of fingers or toes. These symptoms are usually mild and begin gradually. Some people become infected but only have very mild symptoms. Most people (about 80%) recover from the disease without needing hospital treatment. round 1 out of every 5 people who gets COVID-19 becomes seriously ill and develops difficulty breathing. Older people, and those with underlying medical problems like high blood pressure, heart and lung problems, diabetes, or cancer, are at higher risk of developing serious illness. However, anyone can catch COVID-19 and become seriously ill. People of all ages who experience fever or cough associated with difficulty breathing/shortness of breath, chest pain/pressure, or loss of speech or movement should seek medical attention immediately.

COVID-19 SYMPTOMS

Sl No	Symptoms	5	Muscle or body aches
1	Fever or chills	6	Headache
2	Cough	7	New loss of taste or smell
3	Shortness of breath or difficulty breathing	8	Sore throat
4	Fatigue	9	Congestion or runny nose

4.0 BASIC PRECAUTIONS IN WORKER PROTECTION

Guidelines have been issued by the Directorate of Public Health/Govt. of Tamil Nadu & Madurai Municipal Corporation which is being followed strictly as per directions by our Heads of THE COMPANY to follow precisely as per norms & conditions put forth.

Consistently practice social distancing

Cover coughs and sneezes

Maintain hand hygiene

Clean surfaces frequently.

Maximum precautions for labors & staff members are to be followed before reporting to the work in site are followed, which are as follows

Temperature screened with infrared thermometer daily before start of the work (hand held , noncontact)

I) Hand sanitizers are provided individually to all labors & staff members to sanitize properly their hands on regular intervals, which is also being monitored as and when.

II) Adequate numbers of hand sanitizers are stocked well in site office for future use and avoid shortages.

III) Disposable face mask provided to all staff members & labors before start of the work and at end of the day used mask are disposed off in separate bag to avoid any contamination.

IV) Multi vitamin tablets, Arsenic album 30 tablets issued in excess numbers to all labors & staff members to boost up their immunity power.

V) Kabasurahomeo drinks are given in morning and afternoon as a preventive step to increase immunity power.etc

VI) Providing employees with accurate information (in a language they understand) about COVID-19, how it spreads, and risk of exposure.

VII) Conduct toolbox talks on all job sites to explain the protective measures in place.

VIII) Cleaning all high contact surfaces minimum twice a day with proper disinfectants to prevent any positive contamination and to ensure safety

4.1 LABOR DEPLOYMENT BEST PRACTICES

SL. NO	DESCRIPTION	ENSURE / SUGGESTIVE OPTION	RESPONSIBILITY
1	From Containment area	Must Not	Contractor
2	From Quarantine area	i)Should not ii)Tested negative on completion of quarantine	Contractor
3	Containment / Quarantine Habitation	i)Avoid as for as possible ii) tested negative	Contractor
4	Age of person	No Child Labor < 50 as for as possible >55shouldTested negative >65 Avoid	Contractor
5	Medical Complaints: - Diabetics, B.P, Cancer etc	More vulnerable – Avoid	Covid officer
6	Proof of Identity & Address	Must	Covid Officer
7	Providing Social Information of Family	Must	Covid Officer

4.2 WORKERS PROTECTION & PRECAUTION

4.2.1 WORKERS PROTECTION

The workers shall be protected from infection and subsequently likely to become carriers.

SL. NO	WORKERS RESPONSIBILITY	RESPONSIBILITY
1	No sign of COVID-19 Symptoms- prior to 24hrs of Entry –Any positive symptoms such workers shall be removed from the Site and sent to quarantine Centre	COVID-19 Officer
2	Self Attestation-	COVID Officer
3	Undergone for Quarantine/Isolation – Shall be Certified by registered medical practitioner at the time of Recruitment.	COVID-Officer-
4	Non Essential area – Close Contact between workers shall be prevented	COVID Officer –
5	Close Contact area- Shall explore Automation/ or Mechanization	Contractor/covid-19 Officer
6	Social Distancing(6 feet OR More)	Covid Officer
7	(i) Washing Hands oftenand Use Hand Sanitizer whenever physical contact with other substances (ii) Disinfecting the surfaces-Door Handles, Mobile, Laptop, Utensils etc (iii) void face to face meeting	Covid Officer- (i) Arrange facilities & Consumables. (ii) Arrange facilities & Consumables (iii) Meeting-shall be through Video Conferences/Mobile/Webinar (iv) For small meetings with Social PPEs and following Social distancing

8	(i) Drinking Water-shall be provided with individual water Bottle (ii) Avoid touching Eyes, Nose and Mouth with your hands during works (iii) Handle your personnel belongings your self's	(i) Covid Officer (ii) Self- Individual (iii) Self- Individuals
9-	(i) Labor Camp (ii) Use of Toilet – Hand wash before and after (iii) Use Avoid common Towels and Use Tissue Paper	(i) Contractor shall arrange to supply all consumables at Site and avoid labors leaving Site for Purchase (ii) Covid Officer-shall arrange to provide Rubbish Bins and one of the Laborer shall be allocated with responsibilities for proper maintenance.
10	Take Self prepared food as for as possible and preheated where ever possible Lunch Break –staggered break to ensure Social distancing	Covid Officer

4.2.3 WORKERS PRECAUTION

The Employer shall strictly adhere the guidelines and ensure no infected people/vulnerable/chronic people are employed. Entry of unauthorized Visitors shall be refused entry.

PRECAUTION	RESPONSIBILITY
Stay in Home - If Sick yourself or anyone in the family	Individual / Covid Officer
If found Sick on entry sent to Home	Individual / Covid Officer
If Some One at Site Observed Sick, Quarantine, sent Home Report to Covid Officer for further follow up	Covid Officer-Report to Dist.Medical Officer
Temperature Screening twice in a Day @ Morning	Covid Officer
Drivers /Cleaners -shall be kept away from Workplace, Ensure Wearing of Facemask, Hand washing – sanitizing	COVID-Officer
To protect self and Others Ensure COVID-19 guidelines are strictly followed	Covid Officer
Visitors -unauthorized visitors shall be refused entry Authorized Visitors shall be monitored and ensure guidelines are strictly followed till they leave the Site.	Covid Officer/Site In charge

4.2.4 Medical attention One should seek medical attention without losing time, when

- Trouble in breathing
- Persistent pain or pressure in the chest
- New confusion
- Inability to wake or stay awake
- Bluish lips or face

4.3 GENERAL DIRECTIONS TO BE FOLLOWED IN SITE

- No handshake, only Namaste
- Work requiring physical contact should not be carried out.
- Plan all other work to avoid contact between workers to ensure social distancing
- Use of alcohol-based sanitizer
- No person should enter the work site other than the authorized persons mentioned by the supervisors during start of work
- Everyone at work site should always practice social distancing by maintaining a minimum distance of 6 feet from others to prevent spreading
- Avoiding face to face meeting, if necessary, situation arises requiring in person discussion we must follow social distancing
- Brief toolbox talks where employees are asked to check for any symptoms of covid-19
- COVID -19 safety guidelines display board is placed in Tamil& English at suitable apt locations.
- All restrooms, toilet facilities are cleaned on regular basis with proper arrangements.
- All surfaces are cleaned regularly including tabletops, door handles,etc.
- All common areas and meeting places be cleaned at frequent intervals and disinfected at least twice a day.
- Maintaining social distance during breaks and lunch
- Cover coughing, sneezing with a tissue the throwing it in trash and wash hands
- Cleaning hands after coughing or sneezing thoroughly with soap and water
- Adequate number of sanitizer and soaps are made available at all locations including offices, meeting rooms, corridors, washrooms, toiletsetc.
- All are advised not to touch eyes, nose mouth with hands
- Work schedules shall be adjusted to provide time for proper cleaning and disinfecting
- Separate closed bins are provided at various locations in the site to dispose the used mask and hand tissues.
- Outside persons are not allowed to enter the work site
- Labors are to be supplied with standard face mask, gloves etc.
- Gathering places on the site such as sheds shall be eliminated, and instead small break areas shall be used with seating arrangements limited to ensure social distancing.

5 WORK SITE PREVENTIONS

5.1 SITE ACCESS

- At construction site have appointed with health & safety officer, who is tasked to ensure compliance for respective staff against set out COVID-19 safety compliance procedures on daily basis.
- Approved mitigation measures are discussed prior to start of work product cut sheets of the sanitation products to be deployed.
- Consumption of tobacco, smoking and spitting in open place are strictly prohibited inside the construction site.
- COVID-19 awareness signage boarding in regional language is installed at all areas including entry, exit point, labor camps, canteens, meeting rooms, stores. etc
- As the construction staff arrives at site Operating procedures are to be followed and once the construction staff enters the site, their movement outside of the site is strictly restricted.
- Entry to construction site is limited to 1 number and exit from the site is also restricted to 1 number so as to monitor the movements of labors effective
- Daily orientation meetings and toolbox talks are to be conducted in open areas maintain safe distancing norms.
- Mandatory site orientation meetings and safety toolbox for site staff prior to start of daily works are to be conducted .and discuss COVID-19 safety procedures. Highlighting Dos & Don't. So that Laborers are familiar with the guidelines.

5.2 CONSTRUCTION AREAS

- Prepare daily work Schedule and organize work areas into zones to ensure safe distancing norms are followed. Also restrict number of labors in a defined zone to the extent possible.
- Prior to start/end of the daily work, disinfection of tools, equipment's ,PPE's to be done.
- Disinfecting the work zones periodically during the day at break hours.
- Shuffling of workers operating equipment or working in any other areas of the zones shall not be allowed.

6.1 MATERIAL MANAGEMENT

- Loading/unloading zones are clearly identified with limited access to concerned teams only.
- All vehicles entering or exiting the site shall be disinfected properly.
- The delivery staff should go through the site access procedures as outlined in above measures.
- All documents related to delivery shall be reviewed and validated in digital formats and exchange of physical paper works is avoided.
- Unloaded delivery to be disinfected prior to keeping in stores is done.
- If in case the delivered item cannot be disinfected then the item shall be kept stored in separate weather protected area for 72 hrs prior to use.
- Stores are disinfected daily.

- Construction waste shall be removed from site in covered containers.

6.2 TRANSPORTATION TO AND FROM SITE

- Vehicles being used to transport workers or construction goods shall be thoroughly disinfected before and after.
- Every worker to undergo temperature screening before allowed to board into vehicle for travelling is followed mandatorily.
- Adequate markings on the ground are put in place for staff waiting to be screened to comply with safe distancing norms.
- Wearing of desirable masks, Personal Protective Equipment (PPE) as per regulatory guidelines shall be followed at all times in site.
- Safe distancing norms shall be practiced in the vehicle to seat the workers additional trips or vehicles are to be arranged if necessity.
- Travel times are utilized to create awareness about construction workers safety norms.
- Vehicle wash down or disinfection area is created at the site entry to ensure adequate safeguards.
- Non essential / authorized visitors are not allowed to visit construction site.

6.3 LABOR QUARTERS PROTOCOL

- Limit labor dormitory occupancy to ensure compliance with distancing norms.
- Social gatherings shall be restricted, safe distancing and hygiene protocols are to be followed strictly.
- Labor quarters shall be cleaned and disinfected frequently.
- Additional hand washing stations with clean water and soaps at common locations.
- Display Do's & don't boarding's in local vernacular language spoken by the labors.
- Ensure compliance to the extent possible through security guards. at the Entry of Site.
- Arrangements shall be made for regular supply of all essential items like food, grains, groceries, drinking water etc.and restrict the movements of labor outside.
- Visitor entry to labor quarters are banned and restricted to possible extents to avoid any sorts of unwanted contamination.
- Staggered lunch/break hours to reduce number of labors in room at the same time.

6.4 MEDICAL CAMPS

- Conduct medical camps calling registered medical practitioner once in a month to check and monitor the health conditions of labors and staffs working to ensure safety.
- Display details including Name, address and Mobile No of Doctor in Site Office.
- Display Health & Revenue department contact Numbers in Site Office.
- Conduct awareness meetings weekly during Lunch breaks. Discuss the
- Non conformance and remedies so as to ensure the Safety.

7. REGISTERS

The following Registers shall be maintained. in hard and soft cop

- Measurement of BodyTemperature.
- Social Information details pertaining to all workers and Staff with Contact Mobile number ,address, Employment details of other family members
- Stock Register for Drugs & Consumables –Receipt of Supply and issues Name & Date are maintained
- Visitors Register and
- Register for Monthly Medical Checkup–Ensure Doctors observation, Advise/Directions shall be recorded by the Doctor during his/her visit

8 RETURNS

Consolidated details of above Registers shall be submitted before **on 2nd** of each month in the form of soft copy.

9. TRAINING & AWARENESS

- Regular safety induction, orientation, training programs to include topic of COVID – 19 safety for labors & staffs in site.
- COVID – 19 safety trainings are also to be conducted at regular periods to create awareness among the labors and update the information's.
- Installation of AarogyaSetu app for all staff members and labors to be considered. this app has been developed too spread awareness about Covid-19 and notify the individual if they came in close contact with an individual with Covid–19 history.

10 EMERGENCY CONTACTS

- Landline line / Mobile number of District health Office and Primary health center have to be displayed in the site office for quick reference to have easy contact to all.
- District Medical officer & block Development officer's numbers also recorded in the site office to meet any actions in case of any problem.

11. SCENERIO PLANNING

What if someone in the house starts experiencing any of the above symptoms?	What if someone with no pre-existing conditions tests positive?	What if someone with pre-existing conditions tests positive?	Arrangements to be done at home if someone tests positive and are home quarantined	Is there anything that can be done to boost immunity?
a) Mild symptoms: Test only for the person experiencing those symptoms	a) Home quarantine (if that's an option)	a) Talk to the person's doctor in advance (even if the person is hale and healthy now) and formulate an SOP.	It may be difficult to leave the home and get groceries. Prefer On Line Shopping https://roos-food-concepts.business.site/	a) Check with your GP if you can take Arsenic Homeopathic tablets distributed by the TN Govt – ensure it does not play with your existing cocktail of drugs before taking it
b) Strong symptoms including loss of taste/ smell: High chance of COVID - get everyone at home tested.	b) Siddha Hospital (if no breathlessness or extreme symptoms observed)	b) Go directly to the hospital where they have been treated before – but again confirm if the hospitals admit COVID patients.	b) Discuss and pre-arrange with a family member to help buy food/ groceries and leave it at your doorstep	i) "Kabasurakudineer" can be taken twice or thrice a week – but do note some have.
c) Select list of labs that do home testing: i) Apollo Diagnostics https://www.apollo-diagnostics.in/for-patients/test-booking/chennai/ ii) Lister Metropolis	c) Other Hospitals i) Apollo Hospital ii) SIMS Hospital <i>Choose hospitals that you have been to before and are confident with – confirm if those are registered to treat COVID cases</i>	c) Prepare a one-page case summary of the person and keep it handy – if possible hand it over to the paramedical personnel who bring the patient to the hospital (OR) to the doctor who has treated you previously in the hospital (OR) anyone you think can help you	c) If there is a patient at home and the patient attender contracts COVID, plan how you are going to manage their absence.	c) Steam inhalation

Note:

If any one positive and likely to be quarantine/hospitalized. All Members of the family are advised to take the following at least for a week as a prevention procedure even no infections are noticed

i) Multi vitamin Tablets

ii) Zinc Tablets

iii) Steam Breathing

iv) Antibiotic Tablet

Any how take the advise of the Medical Practitioner involved in treatment of COVID-19.

12. COVID-19 CHECKSLIST

Date:

PACKAGE:

(The COVID-19 Officer shall monitor the guidelines and report in the following Check Slip on daily Basis.

No.	Description	Compliance
1	Is it ensured the labor is provided self-attested details as required	Yes/No
2	Are You verified He/ She is free of Symptoms of COVID-19	Yes/No
3	Are You ensured He /She do not have Chronic diseases-Obtain Certificate from Registered Medical Practitioner	Yes/No
4	Is it ensured He / She is not from Contained/Quarantined area	Yes/No
5	If from quarantined area, whether He/ She was Medically Checked for COVID-19 and found Negative	Yes/No
6	Is He / She was subjected to Temperature Screening twice as laid downing the guidelines.	Yes/No
7	Social distancing is followed strictly including in nonessential area by all labors	Yes/No
8	Whether all Labors are wearing PPEs including Face Mask at all times	Yes/No
9	Whether all Registers mentioned in the COVID-19 Plan are maintained at Site.	Yes/No
10	Whether adequate Drugs / Consumables are stocked for a period not less than 15days.	Yes/No
11	Drinking Water in individual Water Bottle is provided .Otherwise whether all precautions are taken to maintain better hygiene at Water Tap	Yes/No
12	Toilets are properly cleaned and disinfected at regular intervals	Yes/No
13	Sanitization is followed in Common Utility area where possible physical contact is observed	Yes/No
14	All living common area including Labor Camp, Toilets Assembling hall, Dining are disinfected morning and end of the Day	Yes/No
15	All Food waste and Spills are collected and disposed safely as prescribed in the guidelines.	Yes/No
16	Are Monthly Medical Checkup conducted and Medical Practitioners observations recorded and follow Action initiated	Yes/No

Note: In Case of non compliance/Violations record the details of non conformance and record the Compliance.

- 1.
- 2.
- 3.

Certified that information's provided are based on facts and actual and correct to best of my knowledge.

COVID-19 Officer

Remarks of Contractor/Authorized Person

Signature

Remarks of Site Engineer

Signature

17. REFERENCES

- Standard Operating Procedure for Social Distancing for offices, workplaces, Factories and other establishments (https://cms.tn.gov.in/sites/default/files/go/hfw_e_191_2020.pdf)
- Standard Operating Procedure - Infection prevention control (https://cms.tn.gov.in/sites/default/files/go/revenue_e_217_2020_0.pdf)
- MHA National Directives for Covid-19 Management (https://static.mygov.in/rest/s3fs-public/mygov_158972288555063671.pdf)
- MoHFW Guidelines on preventive measures to contain spread of COVID-19 in workplace settings (<https://www.mohfw.gov.in/pdf/GuidelinesonpreventivemeasurestocontainspreadofCOVID19inworkplacesettings.pdf>)

Package – 2 Tree Transplantation details

During Layout Finalization after negotiation, 484 Trees are to be removed to construct the WTP. The details of the trees are shown in the below table



Table 41 - Details of Trees Removed from the Site: -


Sl.No	Types of trees	No of Trees
1.	Mango	170
2.	Sapota tree	112
3.	Guava tree	10
4.	Nelli tree	84
5.	Naval tree	71
6.	Theku	05
7.	Vembu	32
Total No of trees		484

Re-plantation: -

All the trees are replanted within the premises. Out of 484 trees, 482 have survived. The Day to day maintenance are carried out by the Madurai Corporation. Watering is done on daily basis. Map showing the location of trees which are removed and location where the replanted are shown below.

Replanted of Trees



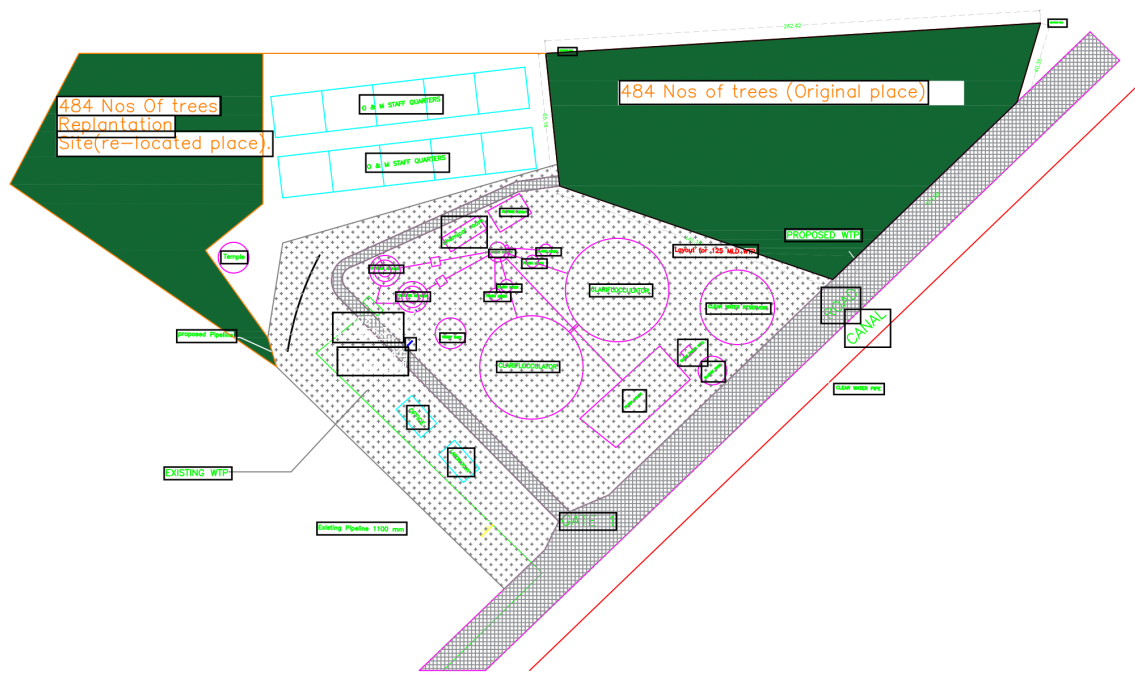

Map Showing the Location Proposed WTP Site where trees in Existence and Location of Replanted Area